

ASC/2S-2100 CONTROLLER WITH:

- CONFIGURATION EEPROM 32790C1440
- SOFTWARE: V1.72
- SPECIAL SOFTWARE: SEE BELOW FUNCTION
- OVERLAPS
 - IN EEPROM
 - KEYBOARD ENTERED
- ANALOG TELEMETRY MODULE: 32825G1
- F/O TELEMETRY MODULE: 33525G1
- TEST INPUT A =
- TEST INPUT B =

A =
B =
C =
D =

LEGEND

| | |
|-------|----------------------|
| BIU | BUS INTERFACE UNIT |
| BU() | C/C, BIU () |
| CB() | CIRCUIT BREAKER () |
| C/C | CONNECTING CABLE |
| CCA | CONTROLLER CABLE "A" |
| CDP | C/C, DR POWER |
| CMA | MMU/CMU CABLE "A" |
| CMB | MMU/CMU CABLE "B" |
| CPO | C/C PRE-EMPT OUTPUTS |
| CPP | C/C PRE-EMPT POWER |
| DR | DETECTOR RACK |
| DS() | DOOR SWITCH () |
| FL() | FLASHER () |
| FR() | FLASH XFER. RELAY |
| LS() | LOAD SWITCH |
| MC | MERCURY CONTACTOR |
| MP | MAIN PANEL |
| PAP | POWER-AUX PANEL |
| PSP | CAB. PWR. SUPPLY |
| SA | SURGE ARRESTOR |
| TB-() | TERM. BLOCK () |

MAIN PANEL PLUG-IN REQUIREMENTS

| | | | | | | | | | |
|--------------|--------------|-------------------------|--------------------------|--------------------------|--------------------------|-----------------|----------------|----------------|--|
| BIU2 T&F | BIU3 T&F | LS9 PED 2 BEACONS | LS10 PED 4 BEACONS | LS11 PED 6 BEACONS | LS12 PED 8 BEACONS | LS13 OL "A" | LS14 OL "B" | LS15 OL "C" | LS16 OL "D" |
| BIU1 T&F | LS1 VEH 1 | LS2 VEH 2 | LS3 VEH 3 | LS4 VEH 4 | LS5 VEH 5 | LS6 VEH 6 | LS7 VEH 7 | LS8 VEH 8 | FL1 <input type="checkbox"/> 1CKT <input checked="" type="checkbox"/> 2CKT |
| FR1 | FR2 | ⊗ FR3 | FR4 | ⊗ FR5 | ⊗ FR6 | K1 | | | |
| L/R V1/V5 | L/R V2/V6 | L/R V3/V7 | L/R V4/V8 | L/R A/C | L/R B/D | LS 24V CONT. | | | |


- DENOTES TYPE OF OPERATION AND/OR WHERE PLUG-IN IS REQUIRED. L = LEFT, R = RIGHT.
- ⊗ DENOTES WHERE "UNUSED RED" JUMPER PART NUMBER 32448G1 IS REQUIRED. INSTALL BETWEEN PINS 1 & 3 FOR LOAD SWITCH OR PINS 6 & 8 AND 5 & 7 FOR FLASH TRANSFER RELAY.

- FLASH:
- ø2&6 YELLOW, ALL OTHERS RED.
 - ALL RED.
 - RELAYS DE-ENERGIZED FOR FLASH.
 - RELAYS ENERGIZED FOR FLASH.

| FLASHER | |
|---------|-------------|
| PIN | FUNCTION |
| 7 | CIRCUIT #1 |
| 8 | CIRCUIT #2 |
| 9 | CHASSIS GND |
| 10 | AC COMMON |
| 11 | 115 VAC |
| 12 | ----- |

| LOAD SWITCH | |
|-------------|---------------|
| PIN | FUNCTION |
| 1 | 115 VAC |
| 2 | CHASSIS GND |
| 3 | RED/DW OUTPUT |
| 4 | ----- |
| 5 | YEL OUTPUT |
| 6 | RED/DW INPUT |
| 7 | GRN/W OUTPUT |
| 8 | YEL INPUT |
| 9 | +24 VDC |
| 10 | GRN/W INPUT |
| 11 | AC COMMON |
| 12 | ----- |

Ⓢ
2.2K
10W

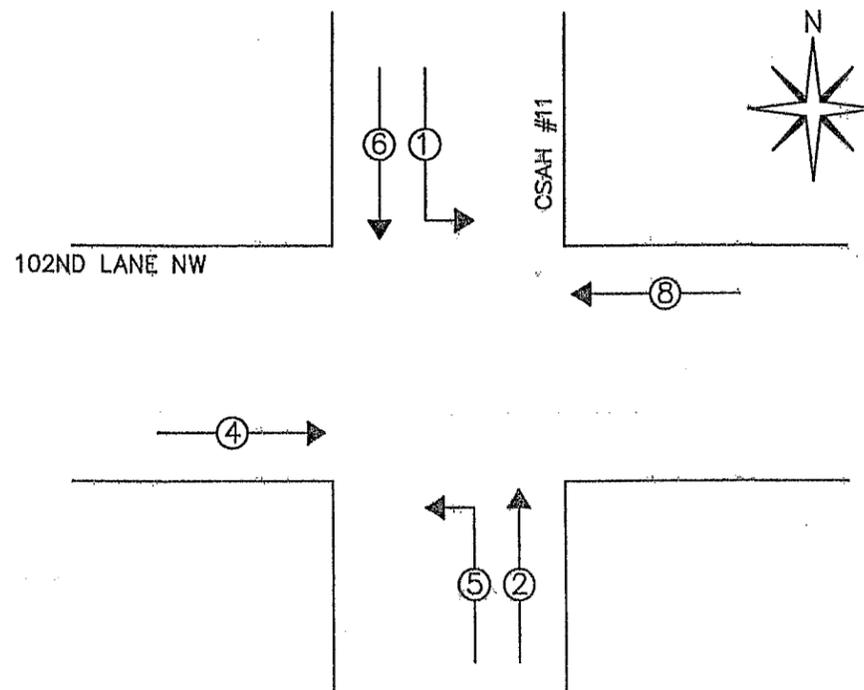

SHEET 1 OF 11

3 USE ONLY COPPER CONDUCTORS FOR FIELD AND SERVICE CONNECTIONS.

2 CONNECT A.C. SERVICE TO TERMINAL BLOCK 501 (LINE), 502 (NEUTRAL) AND GB2 (EARTH) ON RIGHT SIDEWALL OF CABINET.

Ⓢ INSTALL 2.2K, 10 WATT LOAD RESISTORS BETWEEN PINS 7 AND 11 ON LOAD SWITCHES 9, 10, 11 & 12.

NOTES: UNLESS SPECIFIED OTHERWISE


| | | | | |
|-------------------------|------------------|---|------------------------------------|---|
| DESIGNER G.V. T.C.C. | DATE 02/03/97 | ECONOLITE CONTROL PRODUCTS INC. | TRAFFIC CONTROL CORPORATION | 5653 MEMORIAL AVE. OAK PARK HTS, MN 55082 |
| DRAWN MA TCC | 6/9/04 | | | GABINET SPECIFICATION: TS2TYPE1 2004 ANOKA COUNTY |
| CABINET SIZE | | CUSTOMER: ANOKA COUNTY HIGHWAY DEPARTMENT | | FLASHER |
| INSPECTED | | INTERSECTION: CSAH #11 AT 102ND LANE NW | | SW.PACKS |
| APPROVED | | LOCATION: | | |
| CUSTOMER P.O. | INSTALLED BY | SALES ORDER NO. | SIZE B | DRAWING #TS20216PG INTERC |

CONFIRMATION BEACONS



EVP 3 = 1-6
 EVP 4 = 2-5
 EVP 5 = 8
 EVP 6 = 4

LAND




PULL OFF + CAP

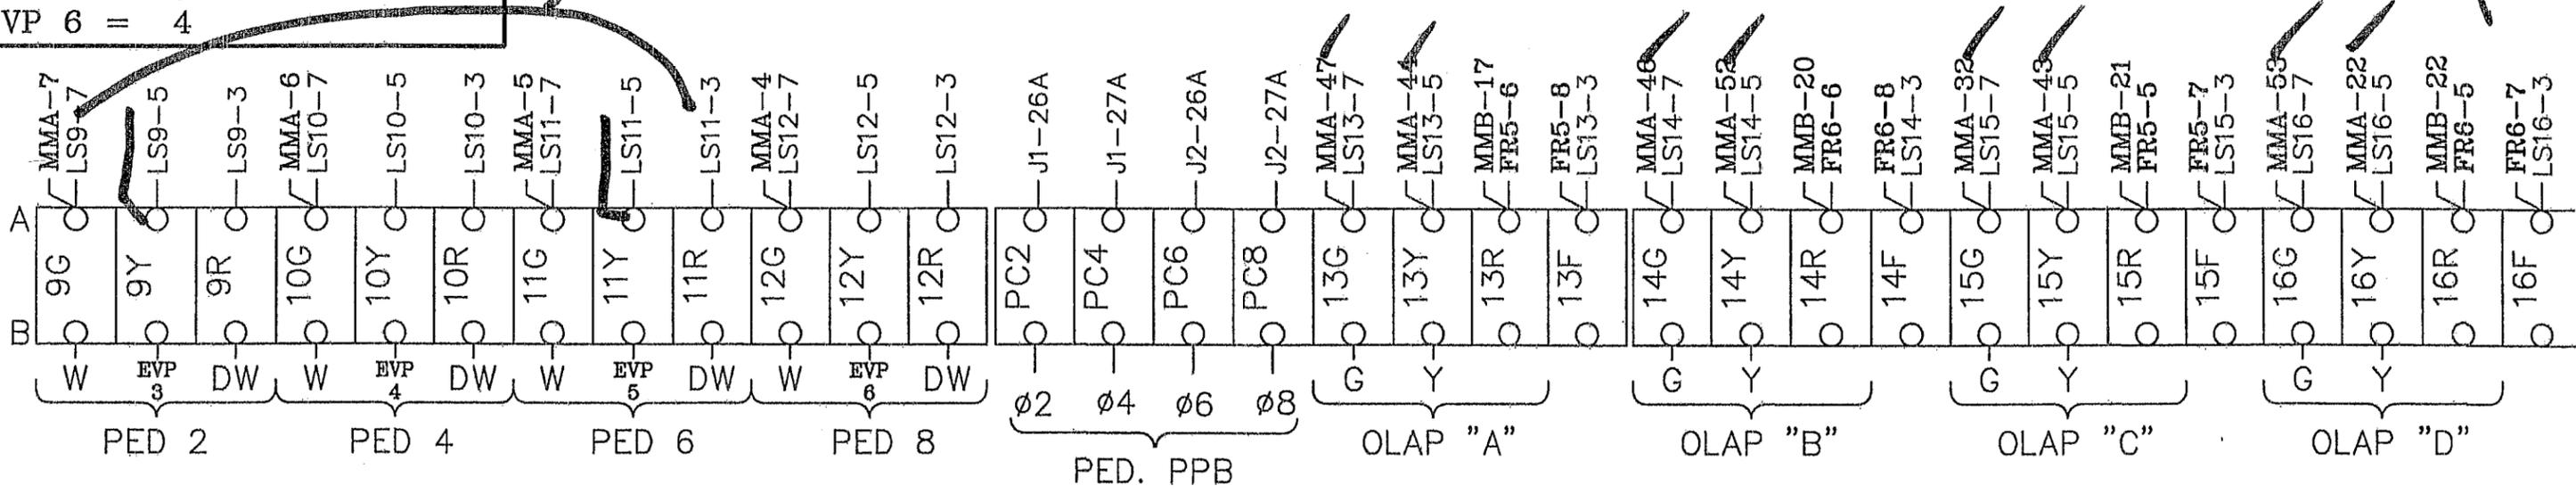



(P.B. COMMON TO GB1)

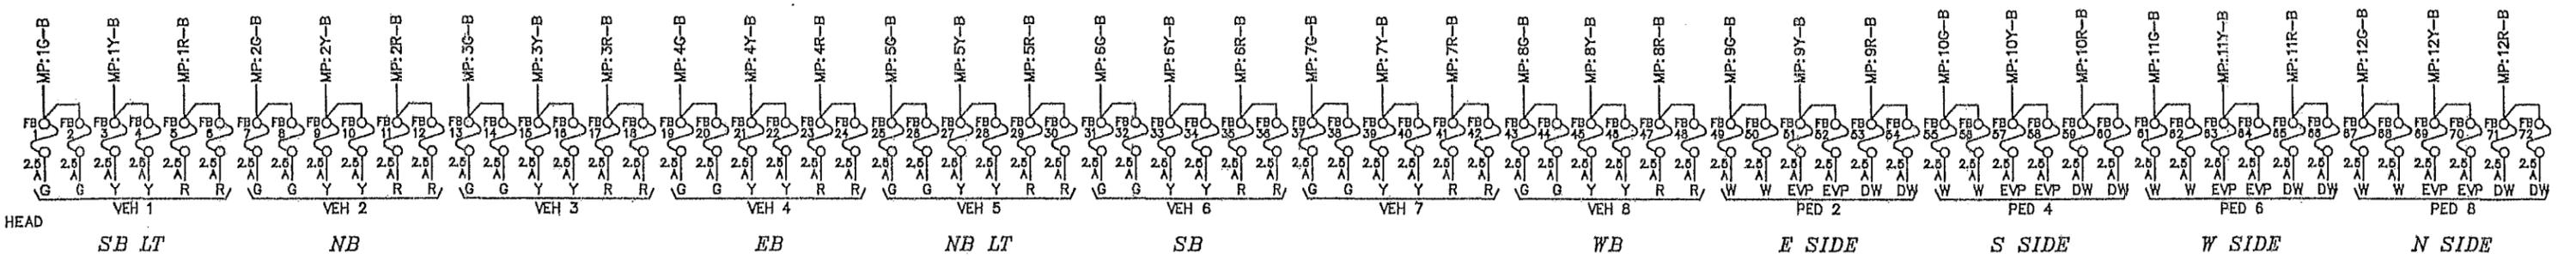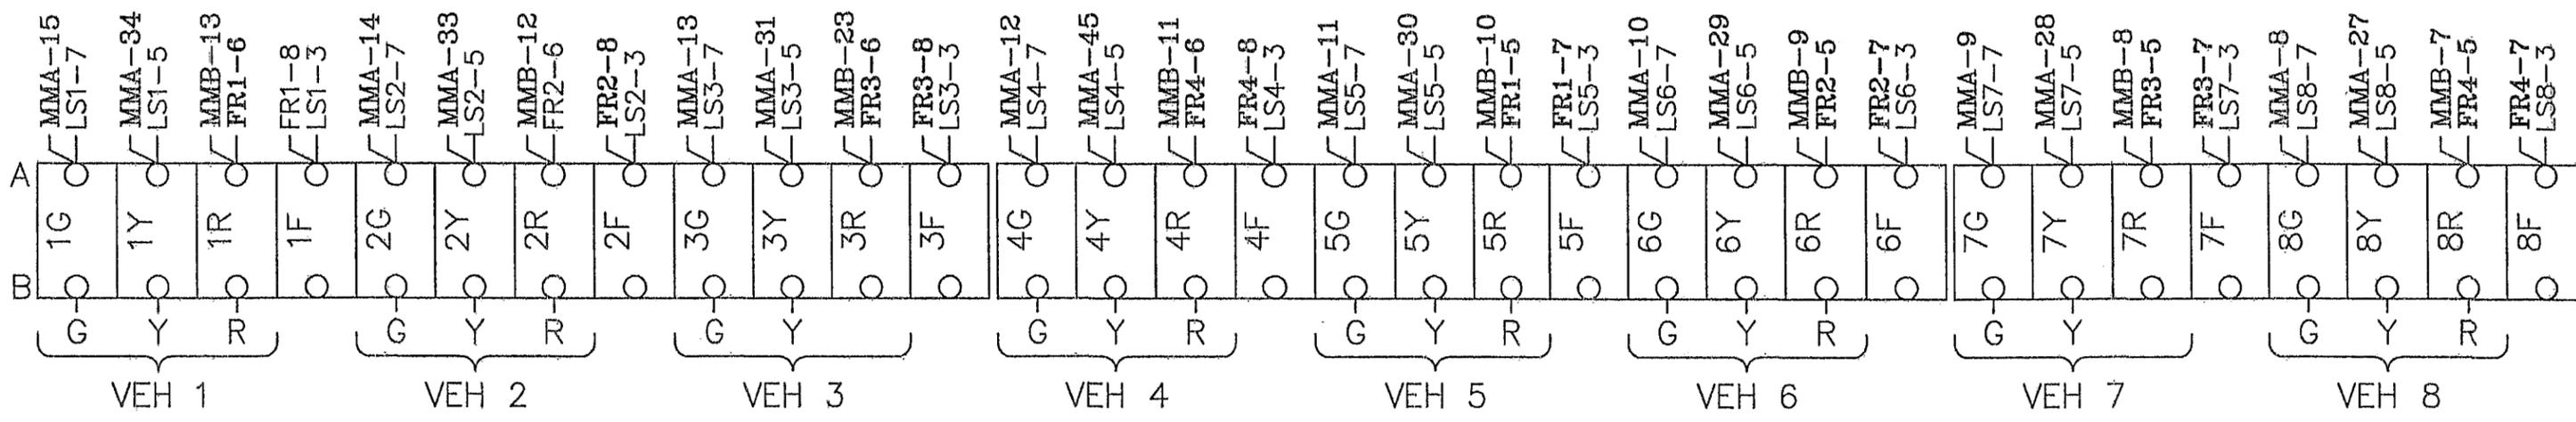

①
2.2K
10W

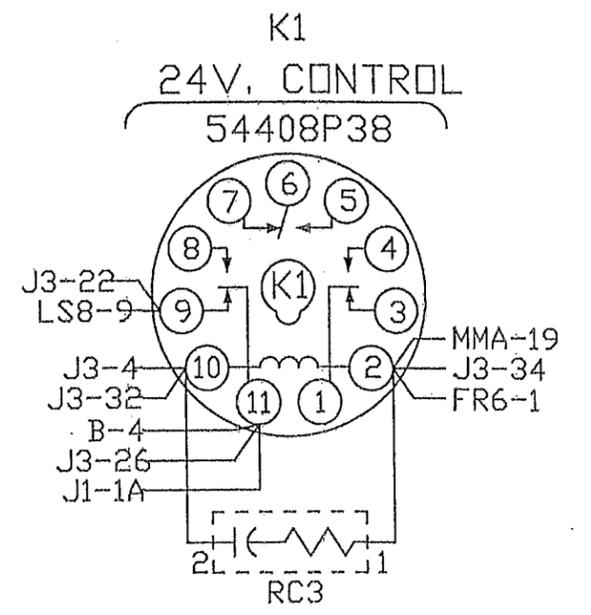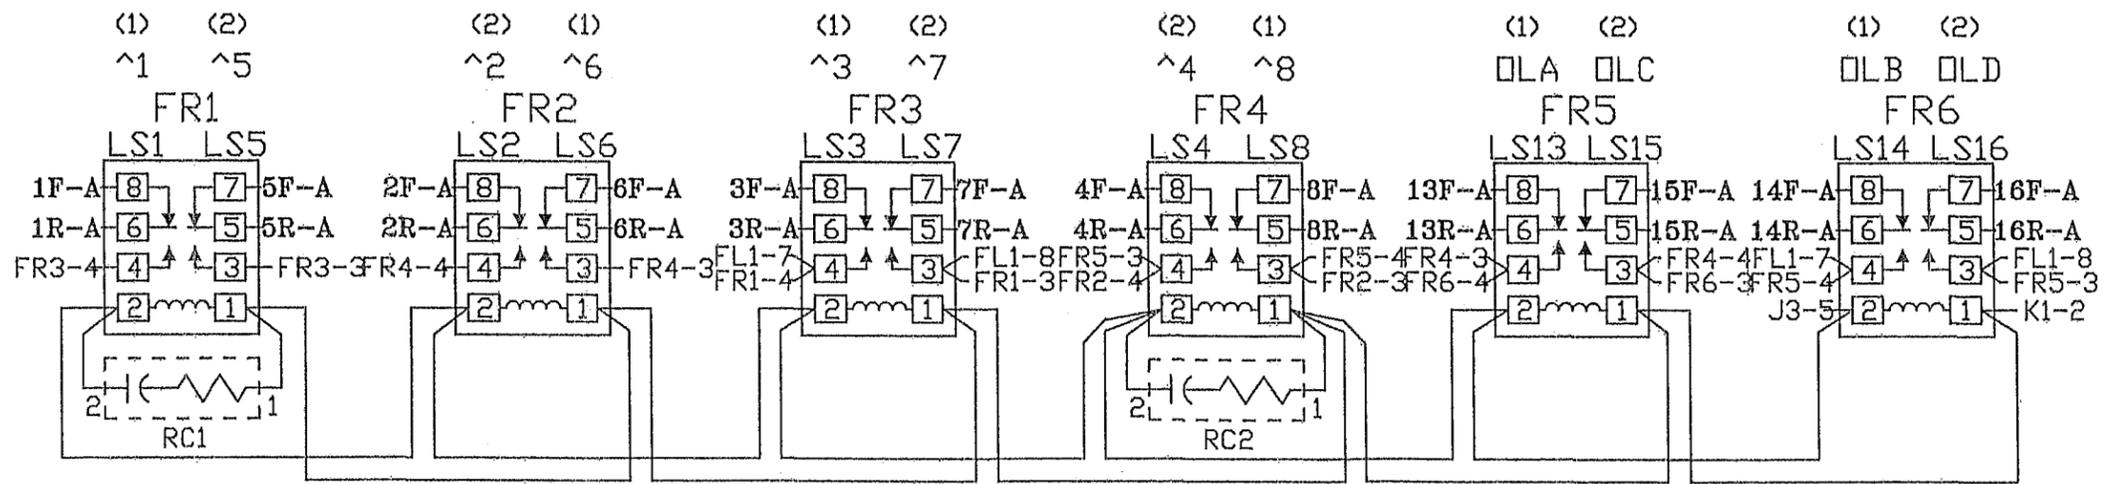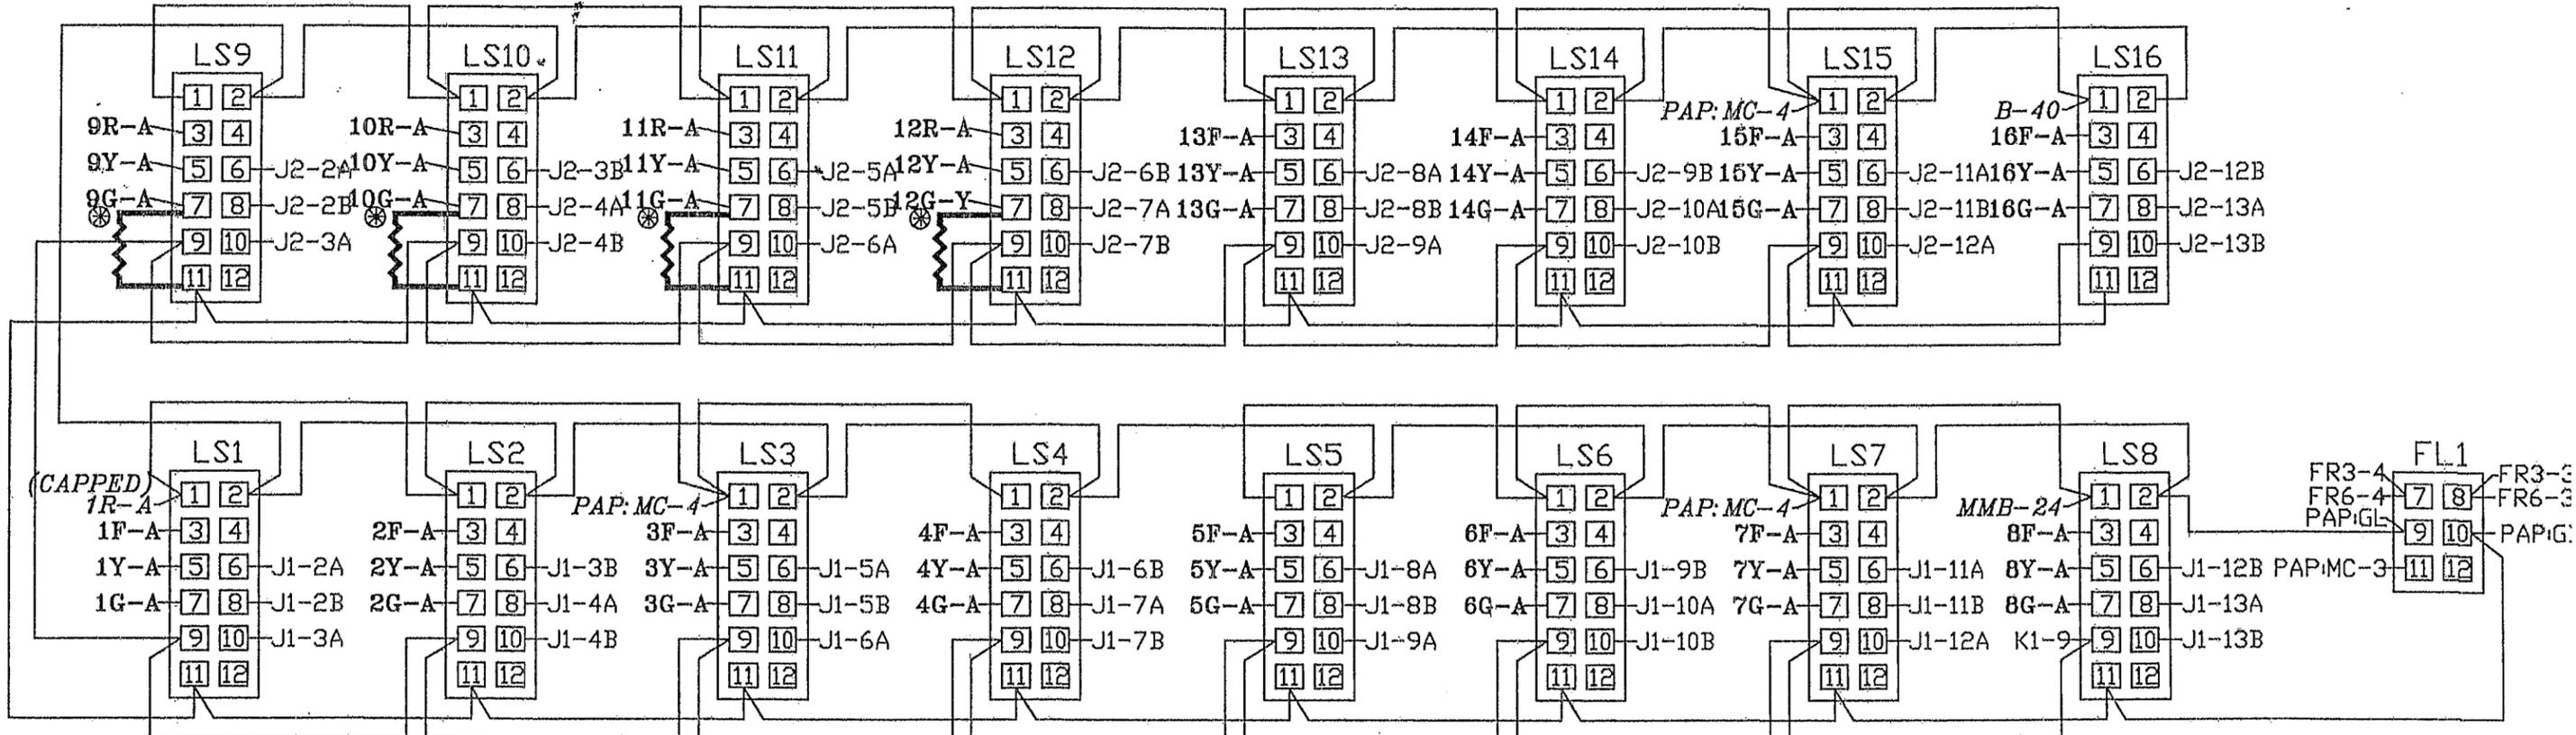

LOADBAY AND FLASH RELAY'S

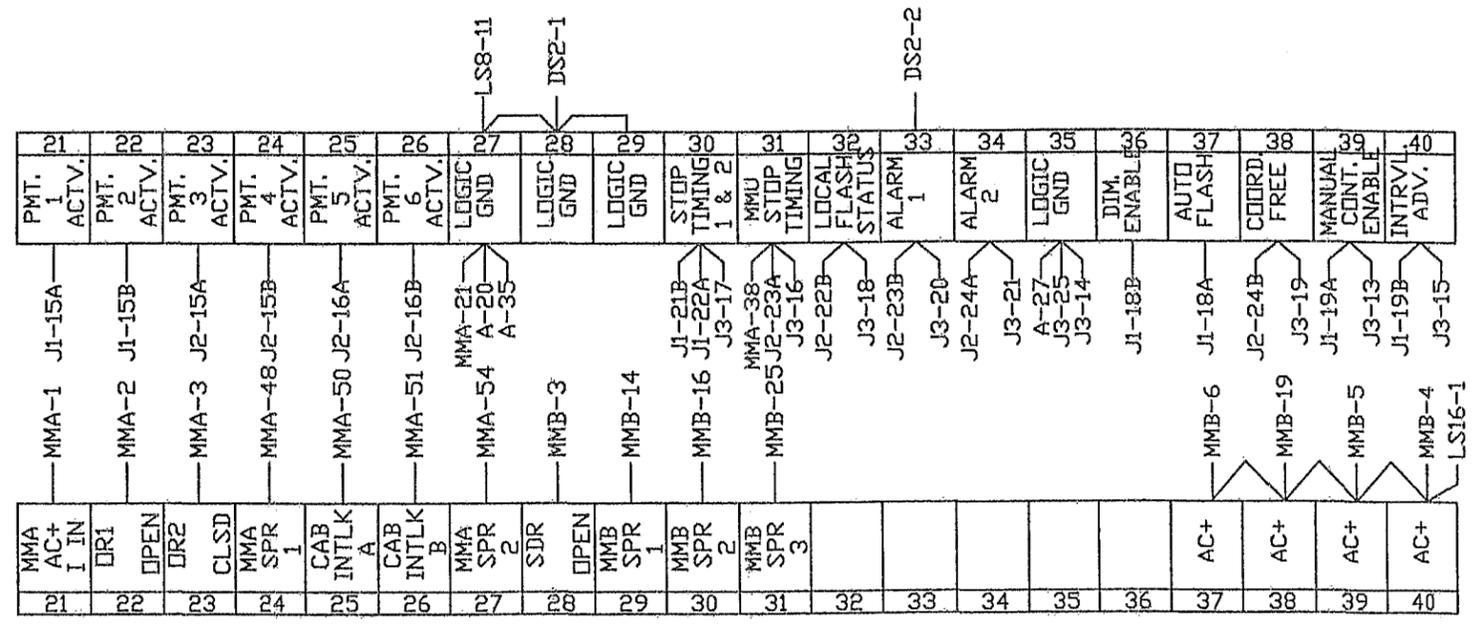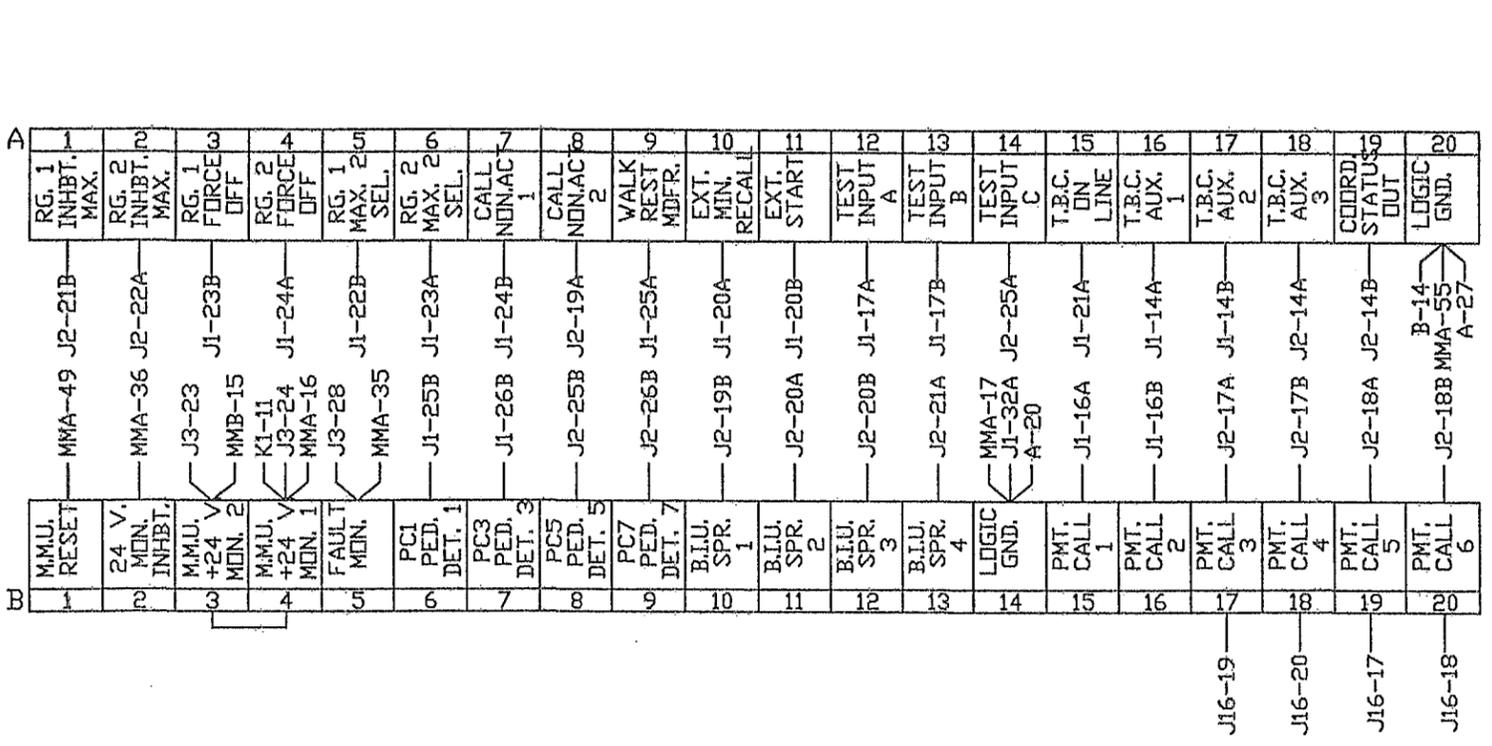

INTERFACE TERMINAL BLOCKS

| BIU #1 | | | BIU #2 | | |
|--------|------------------|--------|--------|-----------------|---------|
| J1 PIN | FUNCTION | TO | J2 PIN | FUNCTION | TO |
| 1A | +24 VDC | K1-11 | 1A | +24 VDC | J2-1B |
| 1B | +24 VDC | J2-1B | 1B | +24 VDC | J1-1B |
| 2A | LS1 RED | LS1-6 | 2A | LS9 RED | LS9-6 |
| 2B | LS1 YELLOW | LS1-8 | 2B | LS9 YELLOW | LS9-8 |
| 3A | LS1 GREEN | LS1-10 | 3A | LS9 GREEN | LS9-10 |
| 3B | LS2 RED | LS2-6 | 3B | LS10 RED | LS10-6 |
| 4A | LS2 YELLOW | LS2-8 | 4A | LS10 YELLOW | LS10-8 |
| 4B | LS2 GREEN | LS2-10 | 4B | LS10 GREEN | LS10-10 |
| 5A | LS3 RED | LS3-6 | 5A | LS11 RED | LS11-6 |
| 5B | LS3 YELLOW | LS3-8 | 5B | LS11 YELLOW | LS11-8 |
| 6A | LS3 GREEN | LS3-10 | 6A | LS11 GREEN | LS11-10 |
| 6B | LS4 RED | LS4-6 | 6B | LS12 RED | LS12-6 |
| 7A | LS4 YELLOW | LS4-8 | 7A | LS12 YELLOW | LS12-8 |
| 7B | LS4 GREEN | LS4-10 | 7B | LS12 GREEN | LS12-10 |
| 8A | LS5 RED | LS5-6 | 8A | LS13 RED | LS13-6 |
| 8B | LS5 YELLOW | LS5-8 | 8B | LS13 YELLOW | LS13-8 |
| 9A | LS5 GREEN | LS5-10 | 9A | LS13 GREEN | LS13-10 |
| 9B | LS6 RED | LS6-6 | 9B | LS14 RED | LS14-6 |
| 10A | LS6 YELLOW | LS6-8 | 10A | LS14 YELLOW | LS14-8 |
| 10B | LS6 GREEN | LS6-10 | 10B | LS14 GREEN | LS14-10 |
| 11A | LS7 RED | LS7-6 | 11A | LS15 RED | LS15-6 |
| 11B | LS7 YELLOW | LS7-8 | 11B | LS15 YELLOW | LS15-8 |
| 12A | LS7 GREEN | LS7-10 | 12A | LS15 GREEN | LS15-10 |
| 12B | LS8 RED | LS8-6 | 12B | LS16-RED | LS16-6 |
| 13A | LS8 YELLOW | LS8-8 | 13A | LS16-YELLOW | LS16-8 |
| 13B | LS8 GREEN | LS8-10 | 13B | LS16-GREEN | LS16-10 |
| 14A | TBC AUX 1 | A-16 | 14A | TBC AUX 3 | A-18 |
| 14B | TBC AUX 2 | A-17 | 14B | COORD. STATUS | A-19 |
| 15A | PMT ACT 1 | A-21 | 15A | PMT ACT 3 | A-23 |
| 15B | PMT ACT 2 | A-22 | 15B | PMT ACT 4 | A-24 |
| 16A | PMT CALL 1 | B-15 | 16A | PMT ACT 5 | A-25 |
| 16B | PMT CALL 2 | B-16 | 16B | PMT ACT 6 | A-26 |
| 17A | TEST A | A-12 | 17A | PMT CALL 3 | B-17 |
| 17B | TEST B | A-13 | 17B | PMT CALL 4 | B-18 |
| 18A | AUTO FLASH | A-37 | 18A | PMT CALL 5 | B-19 |
| 18B | DIM. ENABLE | A-36 | 18B | PMT CALL 6 | B-20 |
| 19A | MANUAL CONT. | A-39 | 19A | CNA 2 | A-8 |
| 19B | INT. ADVANCE | A-40 | 19B | SPARE 1 | B-10 |
| 20A | EXT. MIN. RECALL | A-10 | 20A | SPARE 2 | B-11 |
| 20B | EXT. START | A-11 | 20B | SPARE 3 | B-12 |
| 21A | TBC ONLINE | A-15 | 21A | SPARE 4 | B-13 |
| 21B | STOP TIME (1) | A-30 | 21B | INHIBIT MAX (1) | A-1 |
| 22A | STOP TIME (2) | A-30 | 22A | INHIBIT MAX (2) | A-2 |
| 22B | MAX. 2 (1) | A-5 | 22B | LOCAL FLASH | A-32 |
| 23A | MAX. 2 (2) | A-6 | 23A | MMU FLASH | A-31 |
| 23B | FORCE OFF (1) | A-3 | 23B | ALARM 1 | A-33 |
| 24A | FORCE OFF (2) | A-4 | 24A | ALARM 2 | A-34 |
| 24B | CNA 1 | A-7 | 24B | COORD FREE IN | A-38 |
| 25A | WALK REST MOD. | A-9 | 25A | TEST C | A-14 |
| 25B | PED. ISO. 1 | B-6 | 25B | PED. ISO. 5 | B-8 |
| 26A | PED. ISO. 2 | PC2-A | 26A | PED. ISO. 6 | PC6-A |
| 26B | PED. ISO. 3 | B-7 | 26B | PED. ISO. 7 | B-9 |
| 27A | PED. ISO. 4 | PC4-A | 27A | PED. ISO. 8 | PC8-A |
| 27B | PED. ISO. COMN. | J3-31 | 27B | PED. ISO. COMN. | J1-27B |
| 28A | ADDR. SEL. 0 | ----- | 28A | ADDR. SEL. 0 | J2-32A |
| 28B | ADDR. SEL. 1 | ----- | 28B | ADDR. SEL. 1 | ----- |
| 29A | ADDR. SEL. 2 | ----- | 29A | ADDR. SEL. 2 | ----- |
| 29B | ADDR. SEL. 3 | ----- | 29B | ADDR. SEL. 3 | ----- |
| 30A | RESERVED | ----- | 30A | RESERVED | ----- |
| 30B | RESERVED | ----- | 30B | RESERVED | ----- |
| 31A | EARTH GND. | LS12-2 | 31A | EARTH GND. | J1-31A |
| 31B | LINE FREQ. REF. | J3-29 | 31B | LINE FREQ. REF. | J1-31B |
| 32A | LOGIC GND. | B-14 | 32A | LOGIC GND. | J1-32B |
| 32B | LOGIC GND. | J2-32A | 32B | LOGIC GND. | J2-32A |

| MAIN PANEL CONTROL POWER C/C 34842G4 | |
|---|----------------------------|
| PIN | FUNCTION |
| 1 | LOGIC GROUND |
| 2 | +24 VDC (IN) |
| 3 | ----- |
| 4 | MMU FAULT MONITOR (IN) |
| 5 | LINE FREQ. REFERENCE (IN) |
| 6 | ----- |
| 7 | +12 VAC (IN) |
| 8 | SIGNAL BUS CONTROL (IN) |
| 9 | ----- |
| 10 | FILTERED AC NEUTRAL (IN) |
| 11 | CONT. EQUIP. AC LINE (OUT) |
| 12 | FILTERED AC LINE (IN) |




| CONTROLLER POWER (CCA2) C/C 34842G3 | | | |
|--|-----|---------------|--------|
| WIRE | PIN | SIGNAL | TO |
| 1 | A | FAULT MONITOR | PB-4 |
| 2 | U | AC NEUTRAL | PB-10 |
| 3 | V | EARTH GROUND | PB-9 |
| 4 | W | LOGIC GROUND | PB-1 |
| 5 | P | AC LINE | PB-11 |
| 6 | SHL | EARTH GROUND | CCA2-V |

| TYPE 1 CONTROLLER POWER C/C 34842G2 | | |
|--|------------|-------|
| PIN | FUNCTION | TO |
| A | AC NEUTRAL | PB-10 |
| B | ----- | ----- |
| C | AC LINE | PB-11 |
| D | ----- | ----- |
| E | +12 VDC | ----- |
| F | ----- | ----- |
| G | RESERVED | ----- |
| H | LOGIC GND. | PB-4 |
| I | LOGIC GND. | PB-1 |
| J | EARTH GND. | PB-9 |
| K | +12 VAC | PB-7 |
| L | ----- | ----- |
| M | RESERVED | ----- |
| N | ----- | ----- |
| SHL | EARTH GND. | PIN H |

| CABINET POWER SUPPLY C/C 34842G1 | | |
|-------------------------------------|---------------------|-------|
| PIN | FUNCTION | TO |
| A | AC NEUTRAL | PB-10 |
| B | LINE FREQUENCY REF. | PB-5 |
| C | AC LINE | PB-11 |
| D | +12 VDC | PB-3 |
| E | +24 VDC | PB-2 |
| F | ----- | ----- |
| G | RESERVED | ----- |
| H | LOGIC GND. | PB-1 |
| I | EARTH GND. | PB-9 |
| J | +12 VAC | PB-7 |
| K | ----- | ----- |
| L | RESERVED | ----- |
| M | ----- | ----- |
| SHL | EARTH GND. | PIN H |

| CONTROLLER PORT 1 CONNECTOR | | | |
|-----------------------------|-----------------|-------------|-----------|
| PIN | SIGNAL | TO | FUNCTION |
| 1 | TWISTED PAIR 1+ | SDLC-1 | CONT TXD+ |
| 2 | LOGIC GND. | ----- | ----- |
| 3 | TWISTED PAIR 2+ | SDLC-4 | CONT TXC+ |
| 4 | LOGIC GND. | ----- | ----- |
| 5 | TWISTED PAIR 3+ | SDLC-7 | CONT RXD+ |
| 6 | LOGIC GND. | ----- | ----- |
| 7 | TWISTED PAIR 4+ | SDLC-10 | CONT RXC+ |
| 8 | LOGIC GND. | ----- | ----- |
| 9 | TWISTED PAIR 1- | SDLC-2 | CONT TXD- |
| 10 | PORT 1 DISABLE | ----- | ----- |
| 11 | TWISTED PAIR 2- | SDLC-5 | CONT TXC- |
| 12 | EARTH GND. | SHIELD WIRE | CONT TXD- |
| 13 | TWISTED PAIR 3- | SDLC-8 | CONT RXD- |
| 14 | RESERVED | ----- | ----- |
| 15 | TWISTED PAIR 4- | SDLC-11 | CONT RXC- |


| MMU & BIU PORT 1 CONNECTOR | | | |
|----------------------------|-----------------|-------------|----------|
| PIN | SIGNAL | TO | FUNCTION |
| 1 | TWISTED PAIR 1+ | SDLC-1 | BIU RXD+ |
| 2 | LOGIC GND. | ----- | ----- |
| 3 | TWISTED PAIR 2+ | SDLC-4 | BIU RXC+ |
| 4 | LOGIC GND. | ----- | ----- |
| 5 | TWISTED PAIR 3+ | SDLC-7 | BIU TXD+ |
| 6 | LOGIC GND. | ----- | ----- |
| 7 | TWISTED PAIR 4+ | SDLC-10 | BIU TXC+ |
| 8 | LOGIC GND. | ----- | ----- |
| 9 | TWISTED PAIR 1- | SDLC-2 | BIU RXD- |
| 10 | PORT 1 DISABLE | ----- | ----- |
| 11 | TWISTED PAIR 2- | SDLC-5 | BIU RXC- |
| 12 | EARTH GND. | SHIELD WIRE | BIU TXD- |
| 13 | TWISTED PAIR 3- | SDLC-8 | BIU TXD- |
| 14 | RESERVED | ----- | ----- |
| 15 | TWISTED PAIR 4- | SDLC-11 | BIU TXC- |

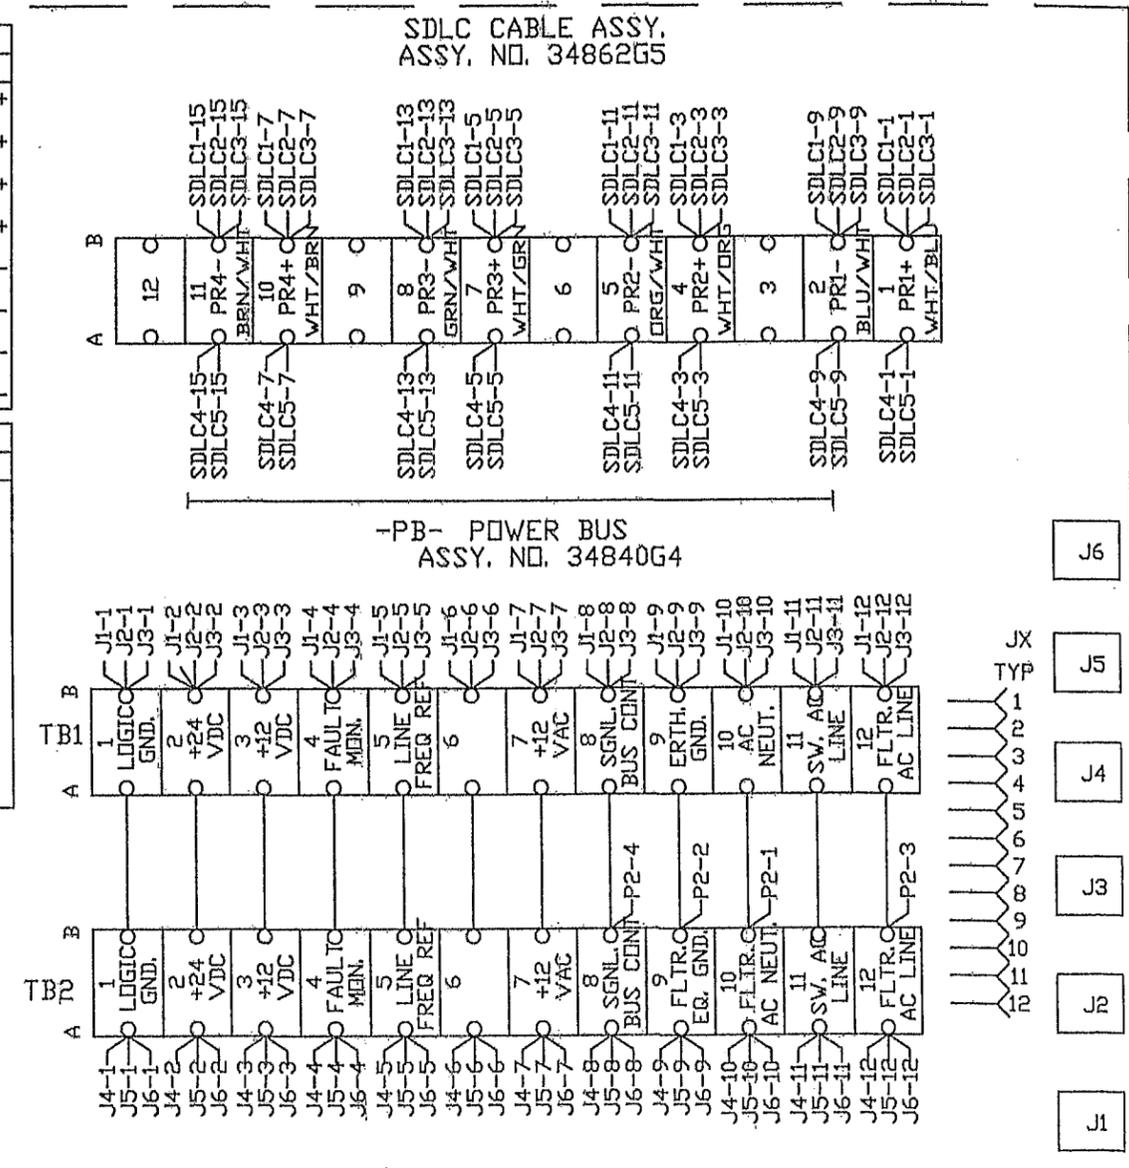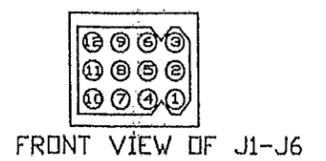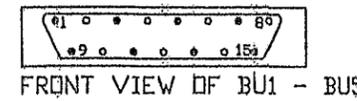

WIRE LIST FOR NEMA MALFUNCTION MANAGEMENT UNIT

| CONNECTOR "A" (MMA) | | | | CONNECTOR "B" (MMB) | | | | | | | |
|---------------------|------|------------------|------------------|---|------|------------------|--------------------|--|--|--|--|
| PIN | WIRE | MON. FUNCTION | TO SIG. FUNCTION | PIN | WIRE | MON. FUNCTION | TO SIG. FUNCTION | | | | |
| A | A-1 | AC+ I INPUT | B21 | A | B-1 | AC+ II INPUT | J3-2 MMU POWER | | | | |
| B | A-2 | OUT RLY 1 OPEN | B22 | B | B-2 | S. DLY RLY COMM. | J3-6 MMU POWER | | | | |
| C | A-3 | OUT RLY 2 CLSD | B23 | C | B-3 | S. DLY RLY OPEN | B28 | | | | |
| D | A-4 | CH. 12 GREEN | 12G-A | D | B-4 | CH. 12 RED | B40 | | | | |
| E | A-5 | CH. 11 GREEN | 11G-A | E | B-5 | CH. 11 RED | B39 | | | | |
| F | A-6 | CH. 10 GREEN | 10G-A | F | B-6 | CH. 9 RED | B37 | | | | |
| G | A-7 | CH. 9 GREEN | 9G-A | G | B-7 | CH. 8 RED | 8R-A ^8 RED | | | | |
| H | A-8 | CH. 8 GREEN | 8G-A | H | B-8 | CH. 7 RED | 7R-A ^7 RED | | | | |
| J | A-9 | CH. 7 GREEN | 7G-A | J | B-9 | CH. 6 RED | 6R-A ^6 RED | | | | |
| K | A-10 | CH. 6 GREEN | 6G-A | K | B-10 | CH. 5 RED | 5R-A ^5 RED | | | | |
| L | A-11 | CH. 5 GREEN | 5G-A | L | B-11 | CH. 4 RED | 4R-A ^4 RED | | | | |
| M | A-12 | CH. 4 GREEN | 4G-A | M | B-12 | CH. 2 RED | 2R-A ^2 RED | | | | |
| N | A-13 | CH. 3 GREEN | 3G-A | N | B-13 | CH. 1 RED | 1R-A ^1 RED | | | | |
| P | A-14 | CH. 2 GREEN | 2G-A | P | B-14 | (SPARE 1) | B29 | | | | |
| R | A-15 | CH. 1 GREEN | 1G-A | R | B-15 | +24V MONITOR II | B-3 +24V MON. II | | | | |
| S | A-16 | +24V MON. I | B-4 | S | B-16 | (SPARE 2) | B30 | | | | |
| T | A-17 | LOGIC GND | B-14 | T | B-17 | CH. 13 RED | 13R-A | | | | |
| U | A-18 | CHASSIS GND | LS7-2 | U | B-18 | S. DLY RLY CLSD | J3-35 | | | | |
| V | A-19 | AC- (COMMON) | K1-2 | V | B-19 | CH. 10 RED | B38 | | | | |
| W | A-20 | OUT RLY 1 COM. | J3-7 | W | B-20 | CH. 14 RED | 14R-A | | | | |
| X | A-21 | OUT RLY 2 COM. | A-27 | X | B-21 | CH. 15 RED | 15R-A | | | | |
| Y | A-22 | CH. 12 YELLOW | -T- | Y | B-22 | CH. 16 RED | 16R-A | | | | |
| Z | A-23 | CH. 11 YELLOW | -T- | Z | B-23 | CH. 3 RED | 3R-A ^3 RED | | | | |
| a | A-24 | CH. 10 WALK | ---- | a | B-24 | RED ENABLE | LS8-1 | | | | |
| b | A-25 | CH. 10 YELLOW | -T- | b | B-25 | (SPARE 3) | B31 | | | | |
| c | A-26 | CH. 9 YELLOW | -T- | c | B-26 | LOCAL FLASH IN | CAPPED POL/AX FLSH | | | | |
| d | A-27 | CH. 8 YELLOW | 8Y-A | | B-27 | SHELL GROUND | LS6-2 EARTH GND. | | | | |
| e | A-28 | CH. 7 YELLOW | 7Y-A | NOTES FOR 16 CHANNEL M.M.U. (1) RELAY CONTACT POSITIONS SPECIFIED ARE FOR NON-CONFLICT MODE. (2) TO PROGRAM MMU, SOLDER JUMPERS IN PROGRAMMING CARD FOR ALL PERMISSABLE PHASE MOVEMENTS, MINIMUM CHANGE DIS-ABLE FOR ALL PEDESTRIAN CHANNELS, AND MIN. FLASH, VOLTAGE MON., AND 24V. MON. LATCH OPTIONS AS DESIRED. M.M.U. CHANNEL ASSIGNMENTS CH. 1 = L/S 1 = ^1 VEH. CH. 2 = L/S 2 = ^2 VEH. CH. 3 = L/S 3 = ^3 VEH. CH. 4 = L/S 4 = ^4 VEH. CH. 5 = L/S 5 = ^5 VEH. CH. 6 = L/S 6 = ^6 VEH. CH. 7 = L/S 7 = ^7 VEH. CH. 8 = L/S 8 = ^8 VEH. CH. 9 = L/S 9 = ^2 PED. CH. 10 = L/S 10 = ^4 PED. CH. 11 = L/S 11 = ^6 PED. CH. 12 = L/S 12 = ^8 PED. CH. 13 = L/S 13 = OLAP A CH. 14 = L/S 14 = OLAP B CH. 15 = L/S 15 = OLAP C CH. 16 = L/S 16 = OLAP D | | | | | | | |
| f | A-29 | CH. 6 YELLOW | 6Y-A | | | | | | | | |
| g | A-30 | CH. 5 YELLOW | 5Y-A | | | | | | | | |
| h | A-31 | CH. 3 YELLOW | 3Y-A | | | | | | | | |
| i | A-32 | CH. 15 GREEN | 15G-A | | | | | | | | |
| j | A-33 | CH. 2 YELLOW | 2Y-A | | | | | | | | |
| k | A-34 | CH. 1 YELLOW | 1Y-A | | | | | | | | |
| m | A-35 | CONT. VOLT. MON. | B-5 | | | | | | | | |
| n | A-36 | +24V MON. INH. | B-2 | | | | | | | | |
| p | A-37 | OUT RLY 1 CLSD | J3-3 | | | | | | | | |
| q | A-38 | OUT RLY 2 OPEN | A-31 | | | | | | | | |
| r | A-39 | CH. 12 WALK | ---- | | | | | | | | |
| s | A-40 | CH. 11 WALK | ---- | | | | | | | | |
| t | A-41 | CH. 9 WALK | ---- | | | | | | | | |
| u | A-42 | CH. 16 YELLOW | 16Y-A | | | | | | | | |
| v | A-43 | CH. 15 YELLOW | 15Y-A | | | | | | | | |
| w | A-44 | CH. 13 YELLOW | 13Y-A | | | | | | | | |
| x | A-45 | CH. 4 YELLOW | 4Y-A | | | | | | | | |
| y | A-46 | CH. 14 GREEN | 14G-A | | | | | | | | |
| z | A-47 | CH. 13 GREEN | 13G-A | | | | | | | | |
| AA | A-48 | (SPARE 1) | B24 | | | | | | | | |
| BB | A-49 | RESET | B-1 | | | | | | | | |
| CC | A-50 | CAB. INTLK A | B25 | | | | | | | | |
| DD | A-51 | CAB. INTLK B | B26 | | | | | | | | |
| EE | A-52 | CH. 14 YELLOW | 14Y-A | | | | | | | | |
| FF | A-53 | CH. 16 GREEN | 16G-A | | | | | | | | |
| GG | A-54 | (SPARE 2) | B27 | | | | | | | | |
| HH | A-55 | TYPE SELECT | A-20 | | | | | | | | |
| | A-56 | SHELL GND | LS15-2 | | | | | | | | |

MMU PROGRAM CARD

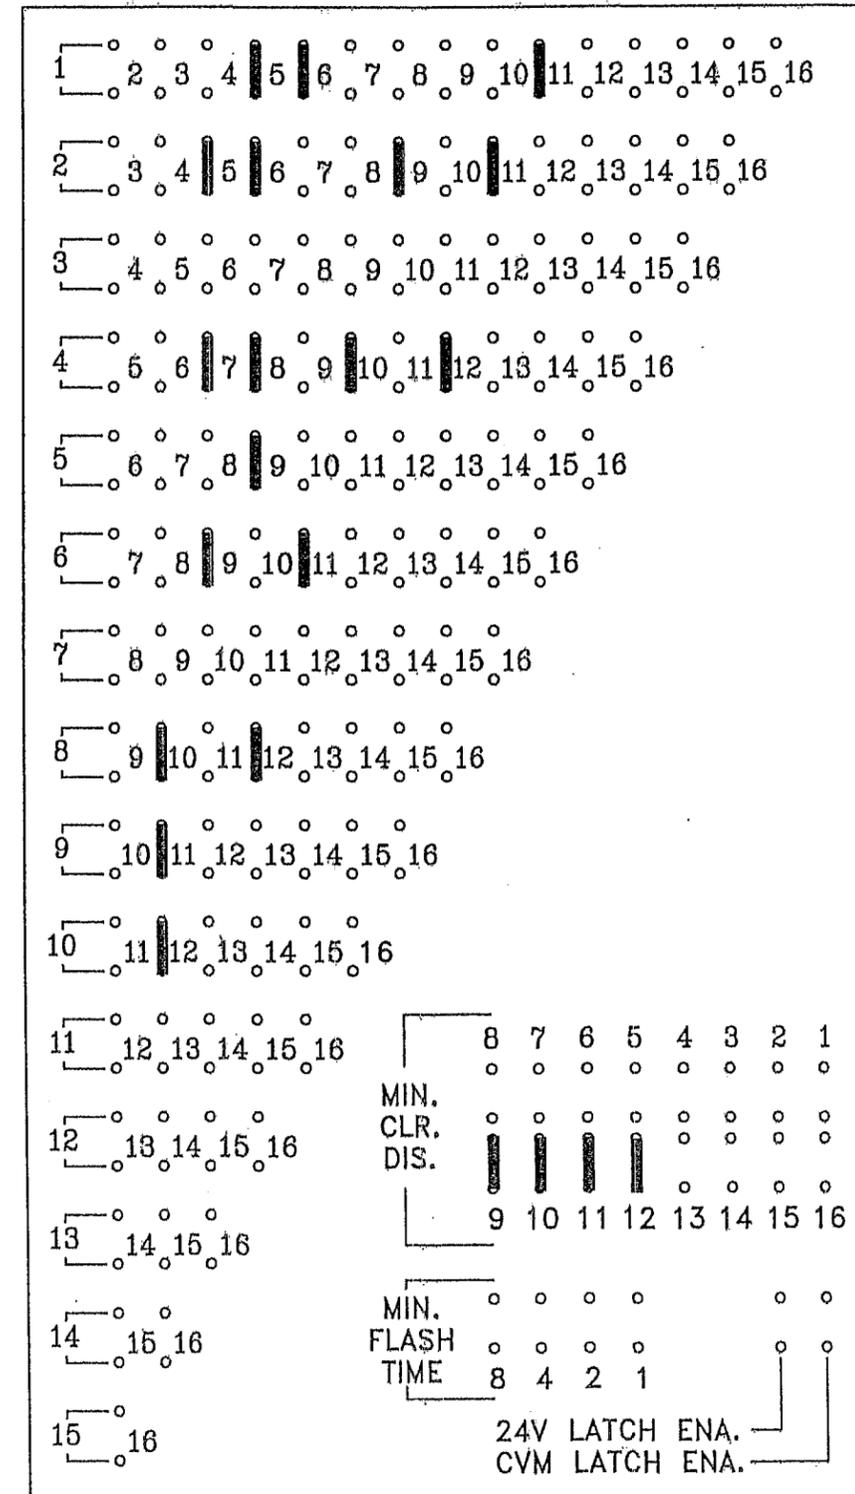

M.M.U. C/C'S AND PROGRAM CAR

DETECTOR RACK 34030G1


①

| | | | | | | | | | | | |
|------------------------|--------------|--------------|--------------|--------------|------------|--------------|------------|--------------|--|---|-----------|
| POWER SUPPLY OR B.I.U. | L3 | L1 | L7 | L5 | L11 | L9 | L15 | L13 | PMT 5 8 □ 2CH OPTICOM/ OPIC CH. C CH. D 4 | PMT 3 1-6 □ 4CH □ 2CH OPTICOM/ OPIC CH. A CH. B 2-5 | PGM. CARD |
| | 5-1 | 1-1 | 6-1 | 2-1 | 4-3 | 4-1 | 8-3 | 8-1 | | | |
| | □ 2CH 5-2 | □ 2CH 1-2 | □ 2CH 6-2 | □ 2CH 2-2 | □ 2CH ∅ | □ 2CH 4-2 | □ 2CH ∅ | □ 2CH 8-2 | □ 2CH ∅ | | |
| | L4 | L2 | L8 | L6 | L12 | L10 | L16 | L14 | PMT 6 | PMT 4 | |

| | | | | | | |
|---------------------------------|------------------------------------|-------------------------------|------------------------------------|--------------------------------|--------------------------------|----------------------------------|
| J13 C/C 33284G10 DC POWER | J16 C/C 33284G8 EXP. OUTPUTS | J14 C/C 33284G2 LPS 1-8 | J18 C/C 33284G9 SYS. OUTPUTS | J15 C/C 33284G3 LPS 9-16 | J17 C/C 33284G6 AC POWER | J19 C/C 33284G17 PGM. CARD |
|---------------------------------|------------------------------------|-------------------------------|------------------------------------|--------------------------------|--------------------------------|----------------------------------|

| ADDRESS TABLE | | | | | |
|---------------|------|----------|--------|------|----------|
| RACK # | JMPR | DET. #'S | RACK # | JMPR | DET. #'S |
| 1 | □□□ | 1-16 | 5 | □□□ | 65-80 |
| 2 | □□□ | 17-32 | 6 | □□□ | 81-96 |
| 3 | □□□ | 33-48 | 7 | □□□ | 97-112 |
| 4 | □□□ | 49-64 | 8 | □□□ | 113-128 |

| DETECTOR ASSIGNMENTS | | |
|----------------------|-------------|---------------|
| CONT. INPUT | PHASE ASGN. | DETECTOR TYPE |
| 1 | 1-1 | 1 |
| 2 | 1-2 | 1 |
| 3 | 5-1 | 1 |
| 4 | 5-2 | 1 |
| 5 | 2-1 | 1 |
| 6 | 2-2 | 1 |
| 7 | 6-1 | 1 |
| 8 | 6-2 | 1 |
| 9 | 4-1 | 1 |
| 10 | 4-2 | 1 |
| 11 | 4-3 | 1 |
| 12 | | |
| 13 | 8-1 | 1 |
| 14 | 8-2 | 1 |
| 15 | 8-3 | 1 |
| 16 | | |
| 17 | | |
| 18 | | |
| 19 | | |
| 20 | | |
| 21 | | |
| 22 | | |
| 23 | | |
| 24 | | |
| 25 | | |
| 26 | | |
| 27 | | |
| 28 | | |
| 29 | | |
| 30 | | |
| 31 | | |
| 32 | | |
| 33 | | |
| 34 | | |
| 35 | | |
| 36 | | |

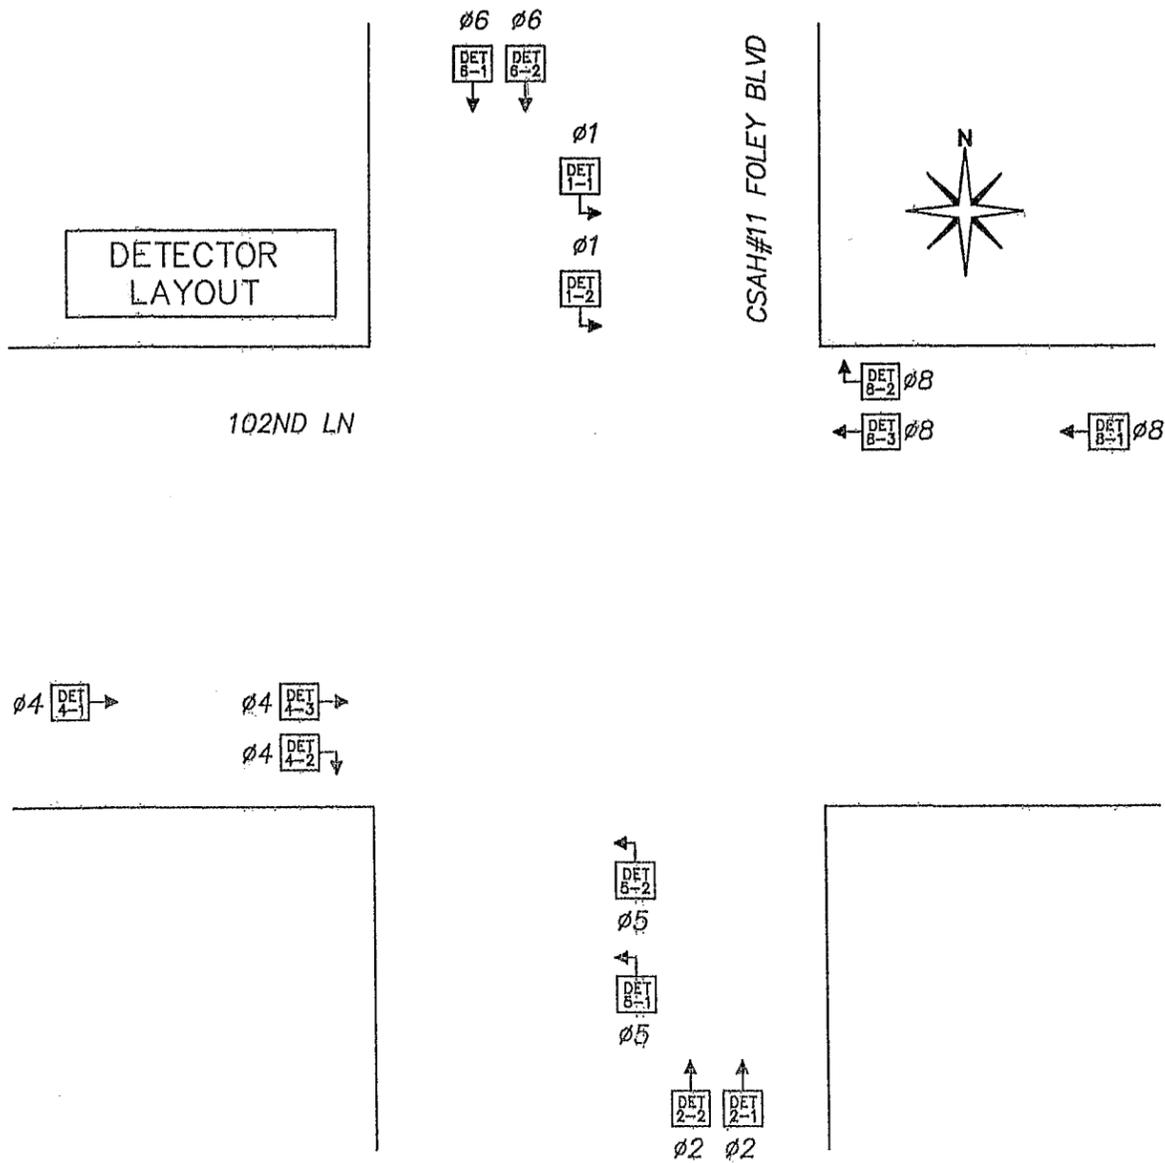


| DETECTOR RACK PROGRAMMING JUMPERS | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------------------------------|-----|-----|------------|-----|-----|-----|-----|------------|-----|------|------|------|------------|------|------|------|------|------------|------|------|------|------|------|------|------|------|------|------|
| DET. TYPE | JP1 | JP2 | SLOT 1/2 ① | | | | | SLOT 3/4 ① | | | | | SLOT 5/6 ① | | | | | SLOT 7/8 ① | | | | | | | | | | |
| | | | JP3 | JP4 | JP5 | JP6 | JP7 | JP8 | JP9 | JP10 | JP11 | JP12 | JP13 | JP14 | JP15 | JP16 | JP17 | JP18 | JP19 | JP20 | JP21 | JP22 | JP23 | JP24 | JP25 | JP26 | JP27 | JP28 |
| ① TS-1 | NO | NO | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| ② TS-2 | YES | YES | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| ③ LM-632T 262-FC | NO | NO | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| ④ MAG. | NO | NO | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |

DETECTOR LOOP
INTERFACE
ASSY. 34040G1

J1
TO DR1: J14
C/C 33284G2

J2
TO DR1: J15
C/C 33284G3

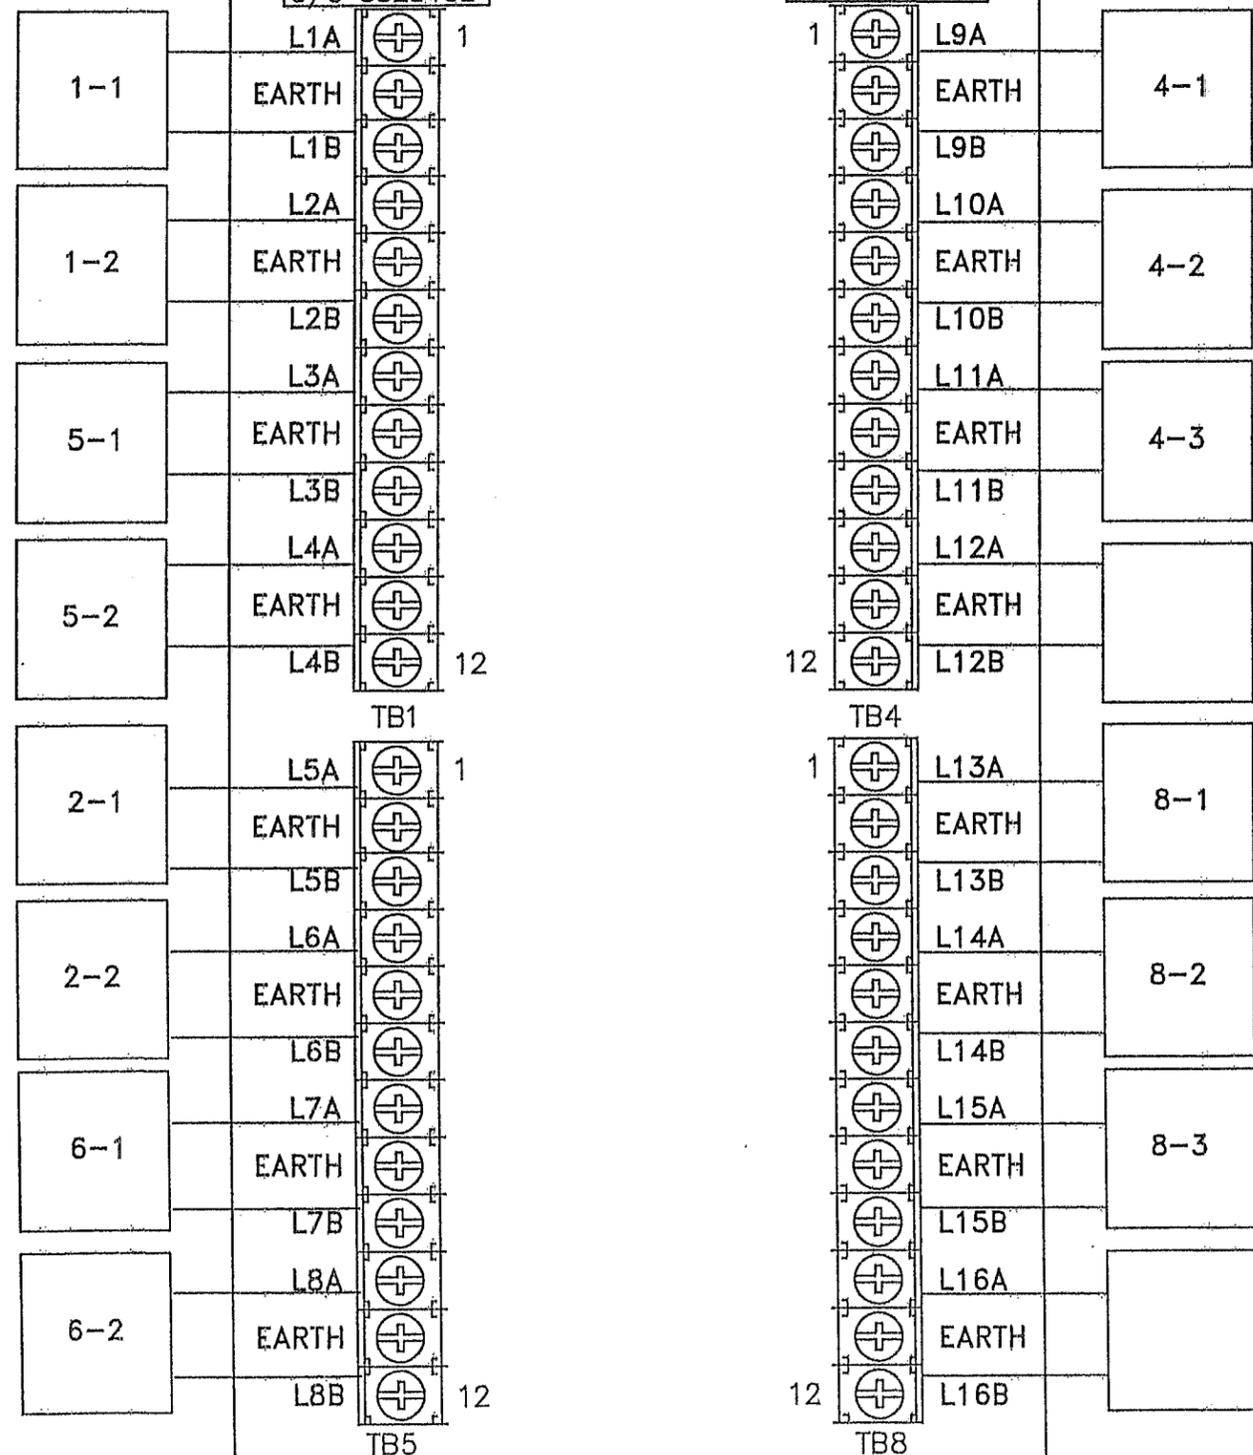

DET. LOOPS 9-16 (J15) C/C 33284G3

| PIN | SIGNAL | TO |
|-----|----------|--------------|
| 1 | LOOP 9+ | LPI2: TB4-1 |
| 2 | LOOP 9- | LPI2: TB4-3 |
| 3 | LOOP 10+ | LPI2: TB4-4 |
| 4 | LOOP 10- | LPI2: TB4-6 |
| 5 | LOOP 11+ | LPI2: TB4-7 |
| 6 | LOOP 11- | LPI2: TB4-9 |
| 7 | LOOP 12+ | LPI2: TB4-10 |
| 8 | LOOP 12- | LPI2: TB4-12 |
| 9 | LOOP 13+ | LPI2: TB8-1 |
| 10 | LOOP 13- | LPI2: TB8-3 |
| 11 | LOOP 14+ | LPI2: TB8-4 |
| 12 | LOOP 14- | LPI2: TB8-6 |
| 13 | LOOP 15+ | LPI2: TB8-7 |
| 14 | LOOP 15- | LPI2: TB8-9 |
| 15 | LOOP 16+ | LPI2: TB8-10 |
| 16 | LOOP 16- | LPI2: TB8-12 |
| 17 | ---- | |
| 18 | ---- | |
| 19 | ---- | |
| 20 | ---- | |

| DET. RACK POWER C/C 34842G5 | | | |
|--------------------------------|----------------|----------------------|-------|
| P1/ DR: J13 | P2/ DR: J17 | FUNCTION | TO |
| 1 | | +12 VDC (DET. POWER) | PB-3 |
| 2 | | +24 VDC (BIU POWER) | PB-2 |
| 3 | | LOGIC GROUND | PB-1 |
| 4 | | EARTH GROUND | PB-9 |
| 5 | | "KEY PIN" | |
| 6 | | LINE FREQUENCY REF. | PB-5 |
| | 1 | EARTH GROUND | ---- |
| | 2 | AC LINE | PB-12 |
| | 3 | AC NEUTRAL | PB-10 |
| | 4 | LOGIC GROUND | ---- |

DET. LOOPS 1-8 (J14) C/C 33284G2

| PIN | SIGNAL | TO |
|-----|---------------------|---------------|
| 1 | LOOP 1+ | LPI1: TB1-1 |
| 2 | LOOP 1- | LPI1: TB1-3 |
| 3 | LOOP 2+ | LPI1: TB1-4 |
| 4 | LOOP 2- | LPI1: TB1-6 |
| 5 | LOOP 3+ | LPI1: TB1-7 |
| 6 | LOOP 3- | LPI1: TB1-9 |
| 7 | LOOP 4+ | LPI1: TB1-10 |
| 8 | LOOP 4- | LPI1: TB1-12 |
| 9 | LOOP 5+ | LPI1: TB5-1 |
| 10 | LOOP 5- | LPI1: TB5-3 |
| 11 | LOOP 6+ | LPI1: TB5-4 |
| 12 | LOOP 6- | LPI1: TB5-6 |
| 13 | LOOP 7+ | LPI1: TB5-7 |
| 14 | LOOP 7- | LPI1: TB5-9 |
| 15 | LOOP 8+ | LPI1: TB5-10 |
| 16 | LOOP 8- | LPI1: TB5-12 |
| 17 | PMT. DET. CH. C | LPI1: TB9-1 |
| 18 | PMT. DET. CH. D | LPI1: TB9-2 |
| 19 | KEY PIN | |
| 20 | PMT. CH. C/D +26VDC | LPI1: TB9-3 |
| 21 | PMT. DC GROUND | LPI1: TB9-4,7 |
| 22 | PMT. CH. A/B +26VDC | LPI1: TB9-8 |
| 23 | PMT. DET. CH. A | LPI1: TB9-9 |
| 24 | PMT. DET. CH. B | LPI1: TB9-10 |
| 25 | ---- | |
| 26 | ---- | |

| EXPANSION OUTPUTS C/C 33284G8 | | |
|----------------------------------|----------------------|---------|
| J16 | FUNCTION | TO |
| 17 | DET. 17 / PMT. A OUT | MP: B19 |
| 18 | DET. 18 / PMT. B OUT | MP: B20 |
| 19 | PMT. C OUT | MP: B17 |
| 20 | PMT. D OUT | MP: B18 |

DETECTOR LOOP INTERFACE

DETECTOR RACK 34030G1



| | | | | | | | | | | |
|------------------------|------------|------------|------------|------------|------------|------------|------------|------------|--|-----------|
| POWER SUPPLY OR B.I.U. | L19 | L17 | L23 | L21 | L27 | L25 | L31 | L29 | | PGM. CARD |
| | ∅ | ∅ | ∅ | ∅ | ∅ | ∅ | ∅ | ∅ | | |
| | □ 2CH ∅ | | |
| | L20 | L18 | L24 | L22 | L28 | L26 | L32 | L30 | | |

| | | | | | | |
|---------------------------------|------------------------------------|-------------------------------|------------------------------------|--------------------------------|--------------------------------|----------------------------------|
| J13 C/C 33284G10 DC POWER | J16 C/C 33284G8 EXP. OUTPUTS | J14 C/C 33284G2 LPS 1-8 | J18 C/C 33284G9 SYS. OUTPUTS | J15 C/C 33284G3 LPS 9-16 | J17 C/C 33284G6 AC POWER | J19 C/C 33284G17 PGM. CARD |
|---------------------------------|------------------------------------|-------------------------------|------------------------------------|--------------------------------|--------------------------------|----------------------------------|

②

| ADDRESS TABLE | | | | | |
|---------------|------|----------|--------|------|----------|
| RACK # | JMPR | DET. #'S | RACK # | JMPR | DET. #'S |
| 1 | □□□□ | 1-16 | 5 | □□□□ | 65-80 |
| 2 | □□□□ | 17-32 | 6 | □□□□ | 81-96 |
| 3 | □□□□ | 33-48 | 7 | □□□□ | 97-112 |
| 4 | □□□□ | 49-64 | 8 | □□□□ | 113-128 |

| DETECTOR ASSIGNMENTS | | |
|----------------------|-------------|---------------|
| CONT. INPUT | PHASE ASGN. | DETECTOR TYPE |
| 1 | 1-1 | 1 |
| 2 | 1-2 | 1 |
| 3 | 5-1 | 1 |
| 4 | 5-2 | 1 |
| 5 | 2-1 | 1 |
| 6 | 2-2 | 1 |
| 7 | 6-1 | 1 |
| 8 | 6-2 | 1 |
| 9 | 4-1 | 1 |
| 10 | 4-2 | 1 |
| 11 | 4-3 | 1 |
| 12 | | |
| 13 | 8-1 | 1 |
| 14 | 8-2 | 1 |
| 15 | 8-3 | 1 |
| 16 | | |
| 17 | | |
| 18 | | |
| 19 | | |
| 20 | | |
| 21 | | |
| 22 | | |
| 23 | | |
| 24 | | |
| 25 | | |
| 26 | | |
| 27 | | |
| 28 | | |
| 29 | | |
| 30 | | |
| 31 | | |
| 32 | | |
| 33 | | |
| 34 | | |
| 35 | | |
| 36 | | |


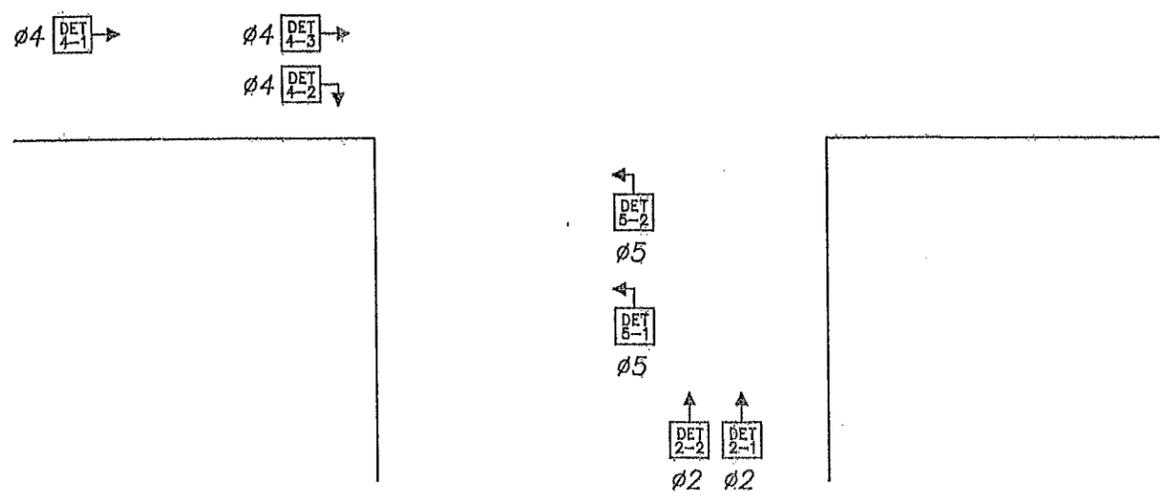
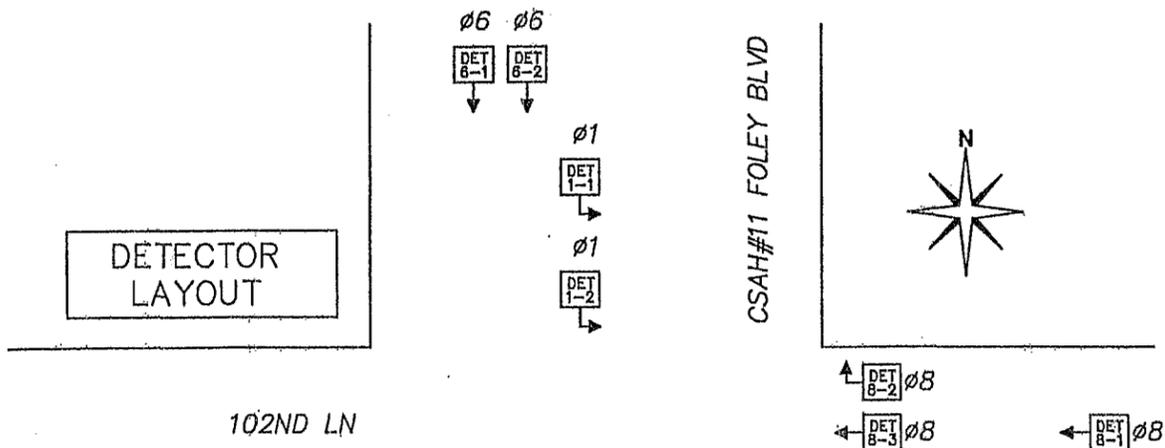


| DET. TYPE | JP1 | JP2 | SLOT 1/2 ① | | | | | SLOT 3/4 ① | | | | | SLOT 5/6 ① | | | | | SLOT 7/8 ① | | | | | | | | | | |
|---------------------|-----|-----|------------|-----|-----|-----|-----|------------|-----|------|------|------|------------|------|------|------|------|------------|------|------|------|------|------|------|------|------|------|------|
| | | | JP3 | JP4 | JP5 | JP6 | JP7 | JP8 | JP9 | JP10 | JP11 | JP12 | JP13 | JP14 | JP15 | JP16 | JP17 | JP18 | JP19 | JP20 | JP21 | JP22 | JP23 | JP24 | JP25 | JP26 | JP27 | JP28 |
| ① TS-1 | No | No | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| ② TS-2 | YES | YES | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| ③ LM-632T 262-FC | No | No | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| ④ MAG. | No | No | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |

DETECTOR LOOP
INTERFACE
ASSY. 34040G1

J1
TO DR1: J14
C/C 33284G2

J2
TO DR1: J15
C/C 33284G3

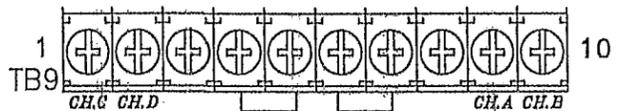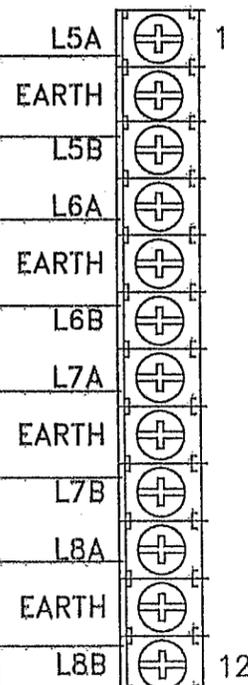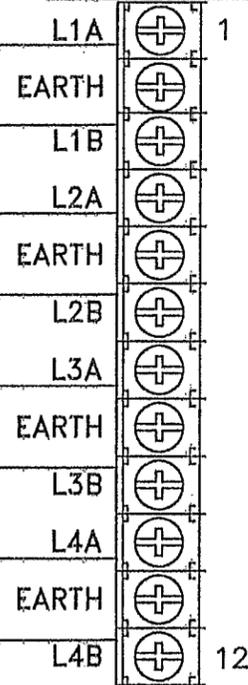

DET. LOOPS 9-16 (J15) C/C 33284G3

| PIN | SIGNAL | TO |
|-----|----------|--------------|
| 1 | LOOP 9+ | LPI2: TB4-1 |
| 2 | LOOP 9- | LPI2: TB4-3 |
| 3 | LOOP 10+ | LPI2: TB4-4 |
| 4 | LOOP 10- | LPI2: TB4-6 |
| 5 | LOOP 11+ | LPI2: TB4-7 |
| 6 | LOOP 11- | LPI2: TB4-9 |
| 7 | LOOP 12+ | LPI2: TB4-10 |
| 8 | LOOP 12- | LPI2: TB4-12 |
| 9 | LOOP 13+ | LPI2: TB8-1 |
| 10 | LOOP 13- | LPI2: TB8-3 |
| 11 | LOOP 14+ | LPI2: TB8-4 |
| 12 | LOOP 14- | LPI2: TB8-6 |
| 13 | LOOP 15+ | LPI2: TB8-7 |
| 14 | LOOP 15- | LPI2: TB8-9 |
| 15 | LOOP 16+ | LPI2: TB8-10 |
| 16 | LOOP 16- | LPI2: TB8-12 |
| 17 | ---- | |
| 18 | ---- | |
| 19 | ---- | |
| 20 | ---- | |

DET. LOOPS 1-8 (J14) C/C 33284G2

| PIN | SIGNAL | TO |
|-----|---------------------|---------------|
| 1 | LOOP 1+ | LPI1: TB1-1 |
| 2 | LOOP 1- | LPI1: TB1-3 |
| 3 | LOOP 2+ | LPI1: TB1-4 |
| 4 | LOOP 2- | LPI1: TB1-6 |
| 5 | LOOP 3+ | LPI1: TB1-7 |
| 6 | LOOP 3- | LPI1: TB1-9 |
| 7 | LOOP 4+ | LPI1: TB1-10 |
| 8 | LOOP 4- | LPI1: TB1-12 |
| 9 | LOOP 5+ | LPI1: TB5-1 |
| 10 | LOOP 5- | LPI1: TB5-3 |
| 11 | LOOP 6+ | LPI1: TB5-4 |
| 12 | LOOP 6- | LPI1: TB5-6 |
| 13 | LOOP 7+ | LPI1: TB5-7 |
| 14 | LOOP 7- | LPI1: TB5-9 |
| 15 | LOOP 8+ | LPI1: TB5-10 |
| 16 | LOOP 8- | LPI1: TB5-12 |
| 17 | PMT. DET. CH. C | LPI1: TB9-1 |
| 18 | PMT. DET. CH. D | LPI1: TB9-2 |
| 19 | KEY PIN | |
| 20 | PMT. CH. C/D +26VDC | LPI1: TB9-3 |
| 21 | PMT. DC GROUND | LPI1: TB9-4,7 |
| 22 | PMT. CH. A/B +26VDC | LPI1: TB9-8 |
| 23 | PMT. DET. CH. A | LPI1: TB9-9 |
| 24 | PMT. DET. CH. B | LPI1: TB9-10 |
| 25 | ---- | |
| 26 | ---- | |

DET. RACK POWER
C/C 34842G5

| P1/ DR: J13 | P2/ DR: J17 | FUNCTION | TO |
|----------------|----------------|----------------------|-------|
| 1 | | +12 VDC (DET. POWER) | PB-3 |
| 2 | | +24 VDC (BIU POWER) | PB-2 |
| 3 | | LOGIC GROUND | PB-1 |
| 4 | | EARTH GROUND | PB-9 |
| 5 | | "KEY PIN" | |
| 6 | | LINE FREQUENCY REF. | PB-5 |
| | 1 | EARTH GROUND | ---- |
| | 2 | AC LINE | PB-12 |
| | 3 | AC NEUTRAL | PB-10 |
| | 4 | LOGIC GROUND | ---- |

EXPANSION OUTPUTS
C/C 33284G8

| J16 | FUNCTION | TO |
|-----|----------------------|---------|
| 17 | DET. 17 / PMT. A OUT | MP: B19 |
| 18 | DET. 18 / PMT. B OUT | MP: B20 |
| 19 | PMT. C OUT | MP: B17 |
| 20 | PMT. D OUT | MP: B18 |

DETECTOR LOOP INTERFACE

