


ANOKA COUNTY DITCH No. 17

Engineers Estimate of Cost of Surveys, Plans & Reports

Names of Assistants		
R.G. Streetly	Engr.	583.00
Harry Lindbloom	Rodman	229.95
R.G. Underdahl	Chainman	132.30
Stanley Crapser	do.	14.40
Frank Miller	Axeman	103.50
Auto Milage		72.85

CHECK DAM

Make Two Thus.

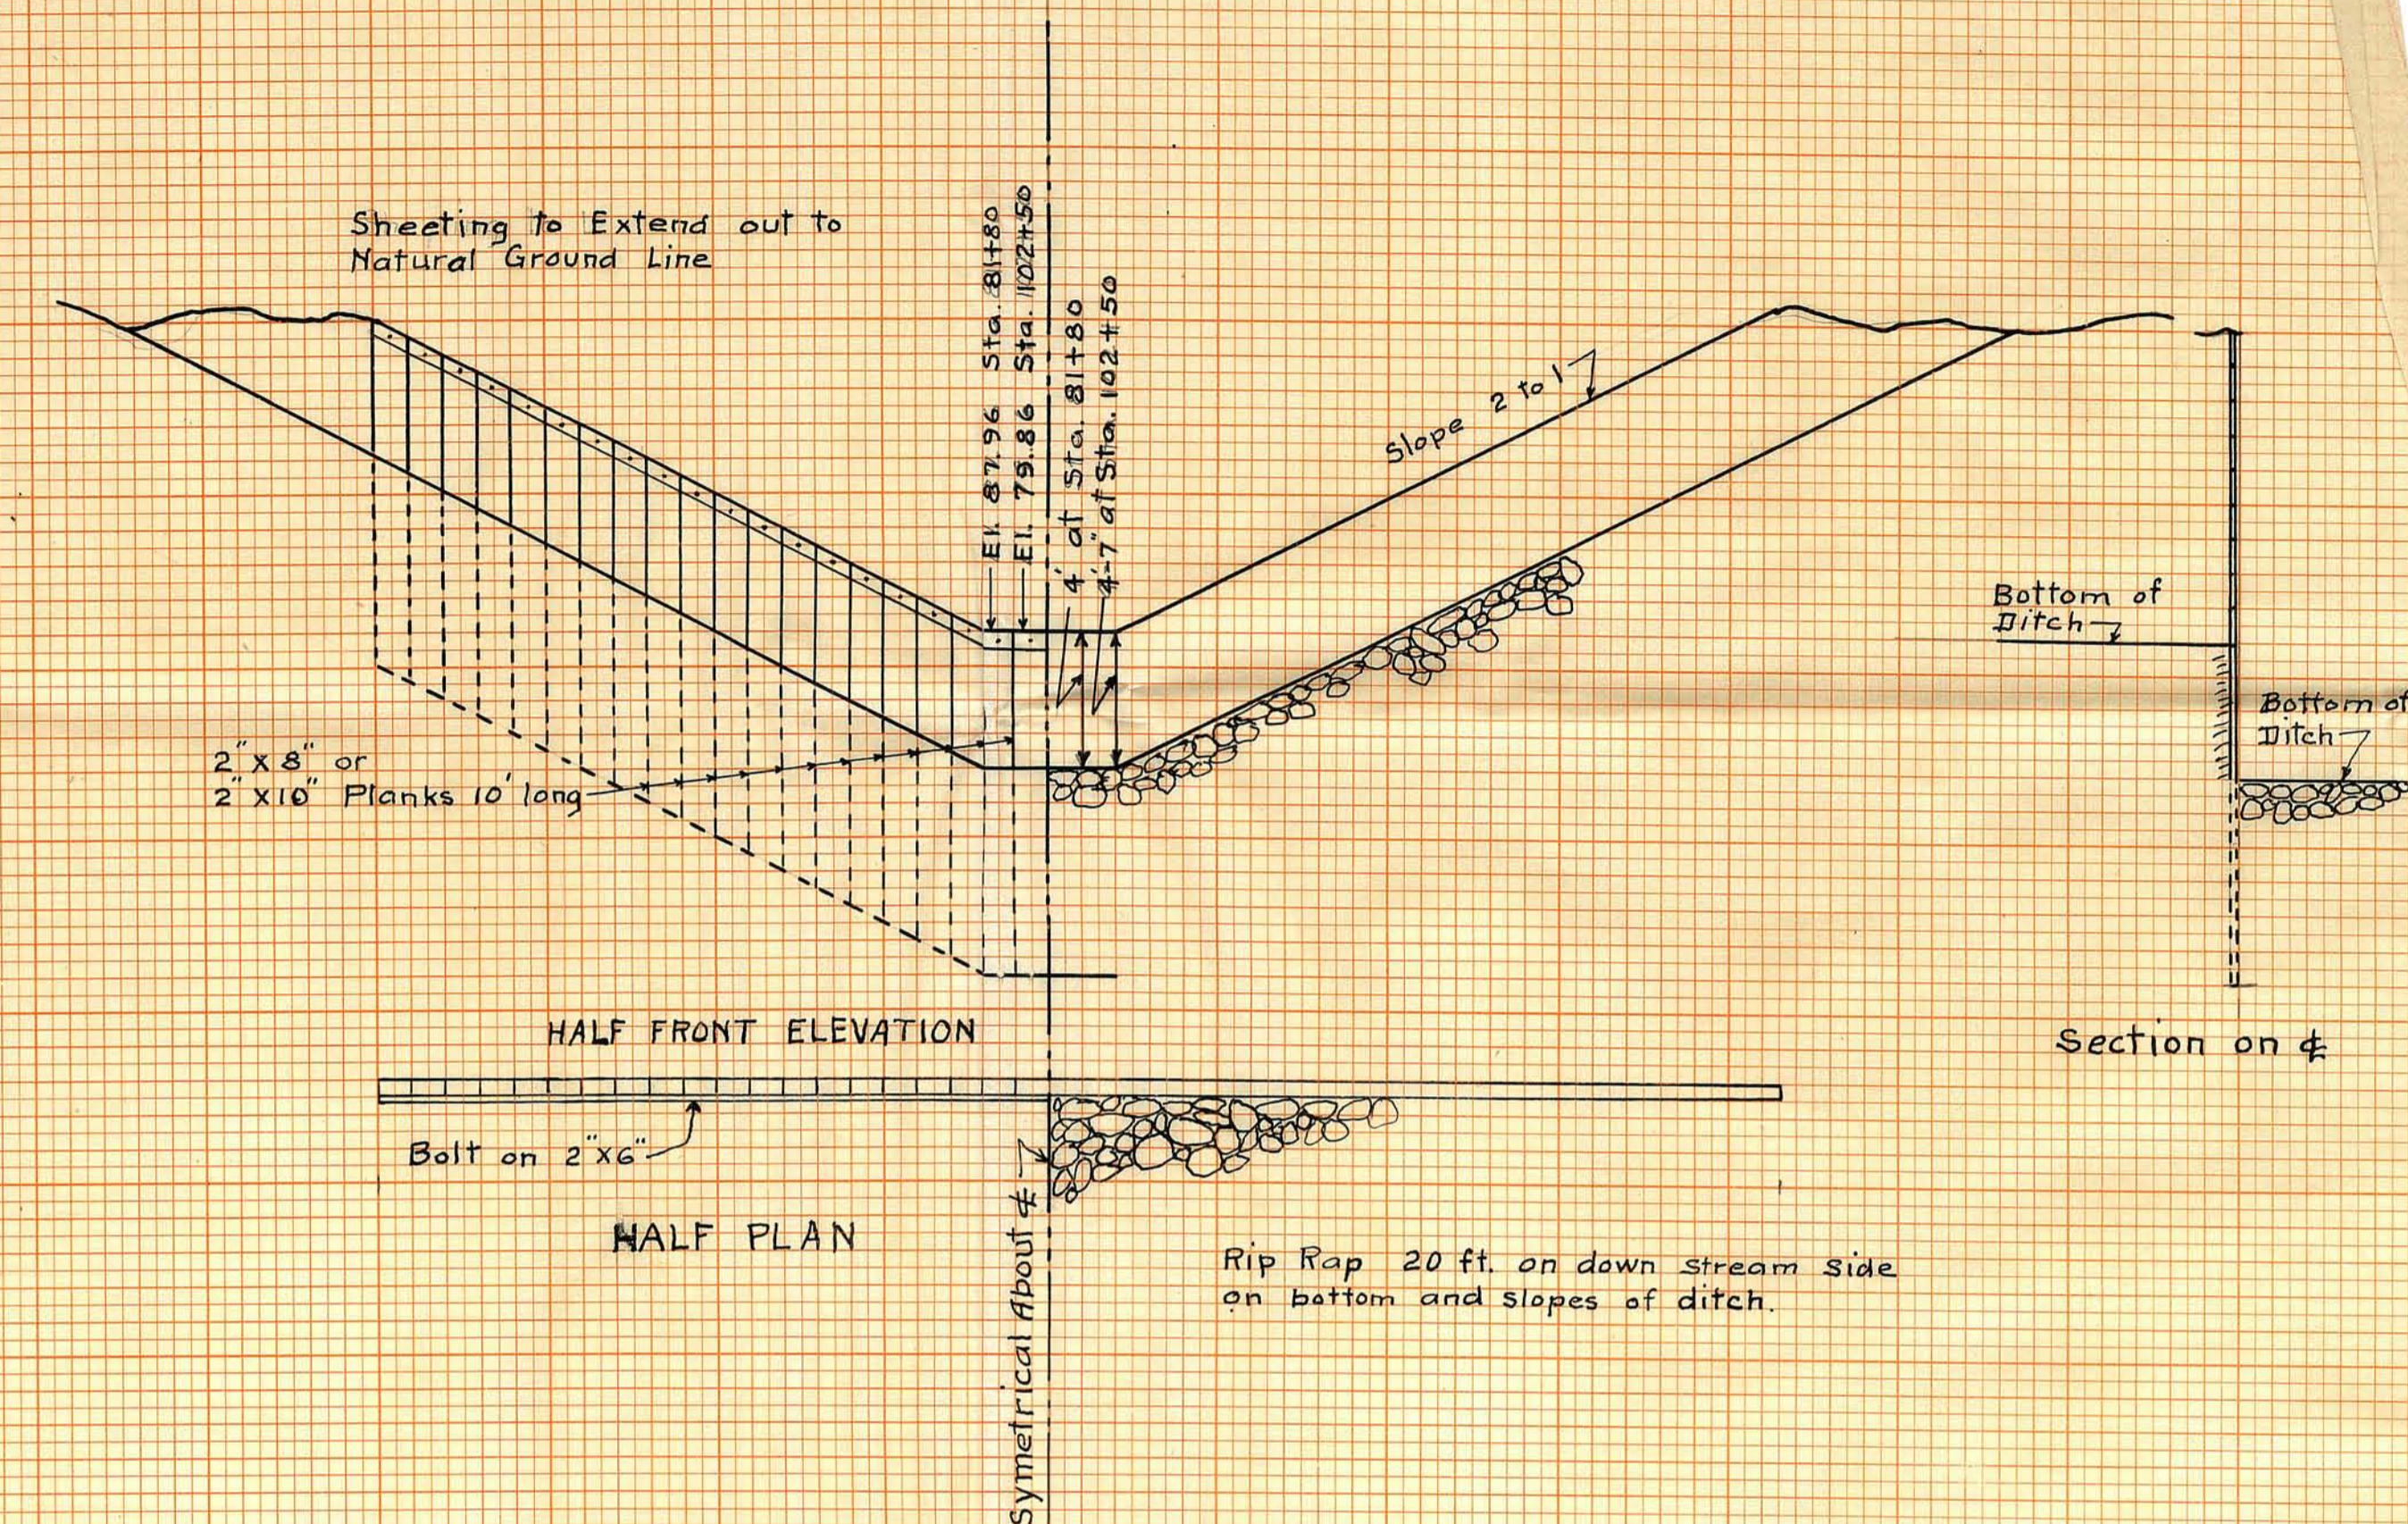

ENGINEERS ESTIMATE

of
Laying out, Establishing & Constructing Anoka Co. Ditch No. 17

Cost of Surveys Specifications & Reports	1136.00
Legal Publications	100.00
Auditors Compensation	200.00
Attorneys Fees	200.00
Supervising, Inspection & Accepting Work	450.00
Viewers Report & Hearing	250.00
Estimated Construction 85433 cu. yds @ 18¢	15377.94
Culverts 552' 36" Iron @ 5.30	2925.60
do. 40' 42" " @ 6.30	252.00
do. 234' 48" " @ 7.40	1731.60
Check dams Sta. 81+80 & Sta. 102+50	250.00
Clearing, Grubbing & Burning	800.00
Rip Rap 38 Cu. yds. @ 2.00	76.00

Total Total \$ 21099.14

FINAL SURVEY BY DATE
 SURVEYED PLOTTED
 NOTE BOOK NO. AREAS CHECKED

ORIGINAL SURVEY BY DATE
 SURVEYED PLOTTED
 NOTE BOOK NO. AREAS CHECKED