
STATE OF MINNESOTA


DEPARTMENT OF TRANSPORTATION

CONSTRUCTION PLAN FOR BITUMINOUS

RESURFACING



COUNTY STATE AID HIG COUNTY ROAD NO From C.R. 15	HWAY NO
To	
From	
COUNTY PROJECT NO	92-28-74
GROSS LENGTH17,5	587 FEET <u>3.331 MILES</u>
BRIDGES LENGTHO	FEET 0 MILES
EXCEPTIONS LENGTHC	FEET O MILES
NET LENGTH 17,	587 FEET 3.331 MILES

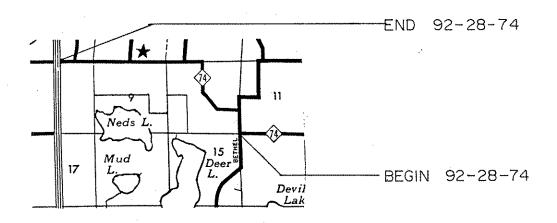

DESIGN SPEED

55 MPH.

STATE AID PROJECT _

GOVERNING SPECIFICATIONS

ALL APPLICABLE FEDERAL, STATE AND LOCAL LAWS AND ORDINANCES WILL BE COMPLIED WITH IN THE CONSTRUCTION OF THIS PROJECT.

I HEREBY CERTIFY THAT THIS PLAN WAS PREPARED BY ME OR UNDER MY DIRECT SUPERVISION AND THAT I AM A DULY REGISTERED

GOVERNING SPECIFICATIONS THE 1988 EDITION OF THE MINNESOTA DEPARTMENT OF TRANSPORTATION	professional engineer under the	E LAWS OF THE STATE OF MINN. DATE 5-22-92
"STANDARD SPECIFICATIONS FOR	COUNTY ENGINEER ANDKA	
CONSTRUCTION" AND "SUPPLEMENTAL SPECIFICATIONS TO THE 1988	חושוגח	COUNTY
STANDARD SPECIFICATIONS FOR CONSTRUCTION" DATED 1/2/1991	RECOMMENDED FOR APPROVAL	,19
SHALL GOVERN.		DISTRICT ENGINEER
	RECOMMENDED FOR APPROVAL	
	APPROVED, 19	
COUNTY PROJECT 92-28-74	<u> </u>	STATE AID ENGINEER

(C.R. 74) (CSAH) SHEET 1 OF 4 SHEETS

	ITEM N□	ITEM	UNIT	TOTAL EST. QUANT
	2232.501	MILL BITUMINOUS SURFACE	SQ. YD.	396
	2123.503	MOTOR GRADER	HOUR	4
1	2331.508	TYPE 41 WEARING COURSE MIXTURE	TON	3976
	2357.502	BITUMINOUS MATERIAL FOR TACK COAT	GAL.	2409
	2580.501	TEMPORARY LANE MARKING	RD.STA.	176

1 INCLUDES 74 TONS FOR STREET APPROACHES AND ENTRANCES

BASIS OF PLANNED QUANTITIES


2331 TYPE 41 WEARING COURSE MIXTURE: 110 LBS/SQ.YD. PER 1"

2357 BITUMINOUS MATERIAL FOR TACK COAT: 0.05 GAL/SQ.YD.

STANDARD DETAIL PLATES		
PLATE NO.	DESCRIPTION	
0004 A	SPECIFICATION REFERENCE TO STANDARD PLATES	
8000 I	STANDARD BARRICADES	

TYPICAL SECTIONS

STATION 0+00 TO STATION 175+87

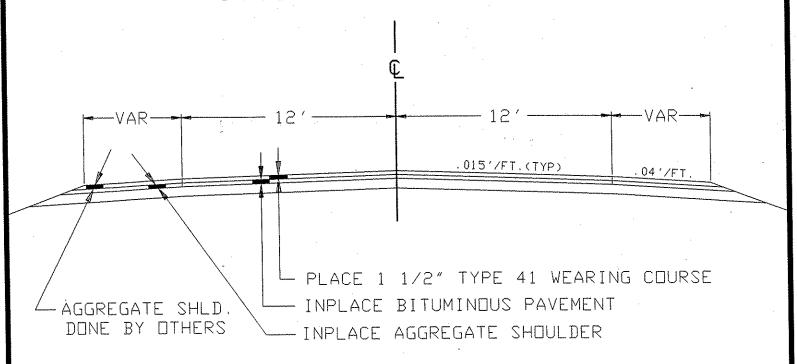

NOTE:

NOT TO SCALE

TYPICAL ENTRANCES

