



STATE OF MINNESOTA
 DEPARTMENT OF TRANSPORTATION
 CONSTRUCTION PLAN FOR BIT. OVERLAY, RECONST.
C.B.'S, REPL. CONC. CURB



COUNTY ROAD NO. 216
 From C.S.A.H. 7
 To C.R. 116
 From _____
 To _____

COUNTY PROJECT NO. 95-39-216

GROSS LENGTH 2605.36 FEET 0.493 MILES
 BRIDGES LENGTH 0.00 FEET 0.000 MILES
 EXCEPTIONS LENGTH 0.00 FEET 0.000 MILES
 NET LENGTH 2605.36 FEET 0.493 MILES

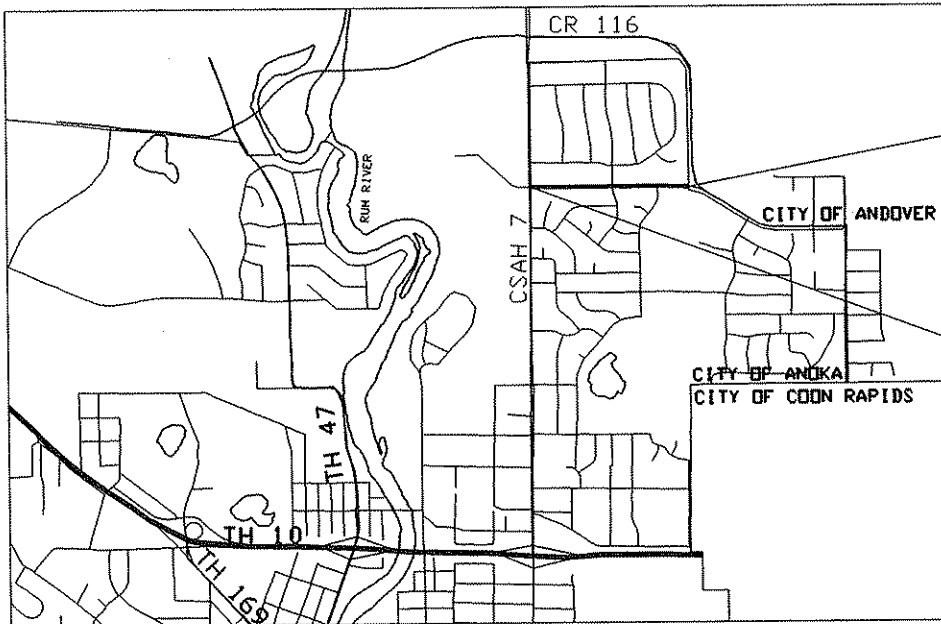

END C.P. 95-39-216

BEGIN C.P. 95-39-216

DESIGN SPEED

ALL APPLICABLE FEDERAL, STATE AND LOCAL LAWS AND ORDINANCES WILL BE COMPLIED WITH IN THE CONSTRUCTION OF THIS PROJECT.

I HEREBY CERTIFY THAT THIS PLAN WAS PREPARED BY ME OR UNDER MY DIRECT SUPERVISION AND THAT I AM A DULY REGISTERED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MINN.

GOVERNING SPECIFICATIONS

THE 1988 EDITION OF THE MINNESOTA DEPARTMENT OF TRANSPORTATION "STANDARD SPECIFICATIONS FOR CONSTRUCTION", AS AMENDED BY THE MAY 2, 1994 SUPPLEMENTAL SPECIFICATIONS, SHALL GOVERN.

[Signature] REG. NO. 20235 DATE 5/18/95
 DESIGN ENGINEER

APPROVED 5/18/95 *[Signature]*
 ANOKA COUNTY ENGINEER

COUNTY PROJECT 95-39-216

SHEET 1 OF 4 SHEETS

ITEM NO	ITEM	UNIT	TOTAL EST. QUANT
2104.501	REMOVE CURB AND GUTTER	LIN FT	1,180
2232.501	MILL BITUMINOUS SURFACE	SQ YD	4,938
2340.508	TYPE 41 WEARING COURSE MIXTURE	TON	1,070
2357.502	BITUMINOUS MATERIAL FOR TACK COAT	GALLON	595
0504.602	ADJUST GATE VALVE	EACH	4
① 0506.602	ADJUST FRAME AND RING CASTING (SPEC)	EACH	10
0506.602	GROUT DRAINAGE STRUCTURE	EACH	4
0506.602	REPAIR DRAINAGE STRUCTURE	EACH	4
2531.501	CONCRETE CURB & GUTTER DESIGN B618	LIN FT	50
2531.501	CONCRETE CURB & GUTTER DESIGN D418	LIN FT	1,130
2580.501	TEMPORARY LANE MARKING	RD STA	26

① SANITARY SEWER STRUCTURE

DESIGN DESIGNATION


TYPE 41 WEAR: 41WEA50055Y

BASIS OF PLANNED QUANTITIES


2340 TYPE 41 WEARING COURSE MIX.: 120 LBS./SQ.YD. PER 1" THICK
 2357 BITUMINOUS MATERIAL FOR TACK COAT: 0.05 GAL./SQ.YD.

STANDARD DETAIL PLATES	
PLATE NO.	DESCRIPTION
0004 A	SPECIFICATION REFERENCE TO STANDARD PLATES
8000 I	STANDARD BARRICADES

TYPICAL SECTIONS

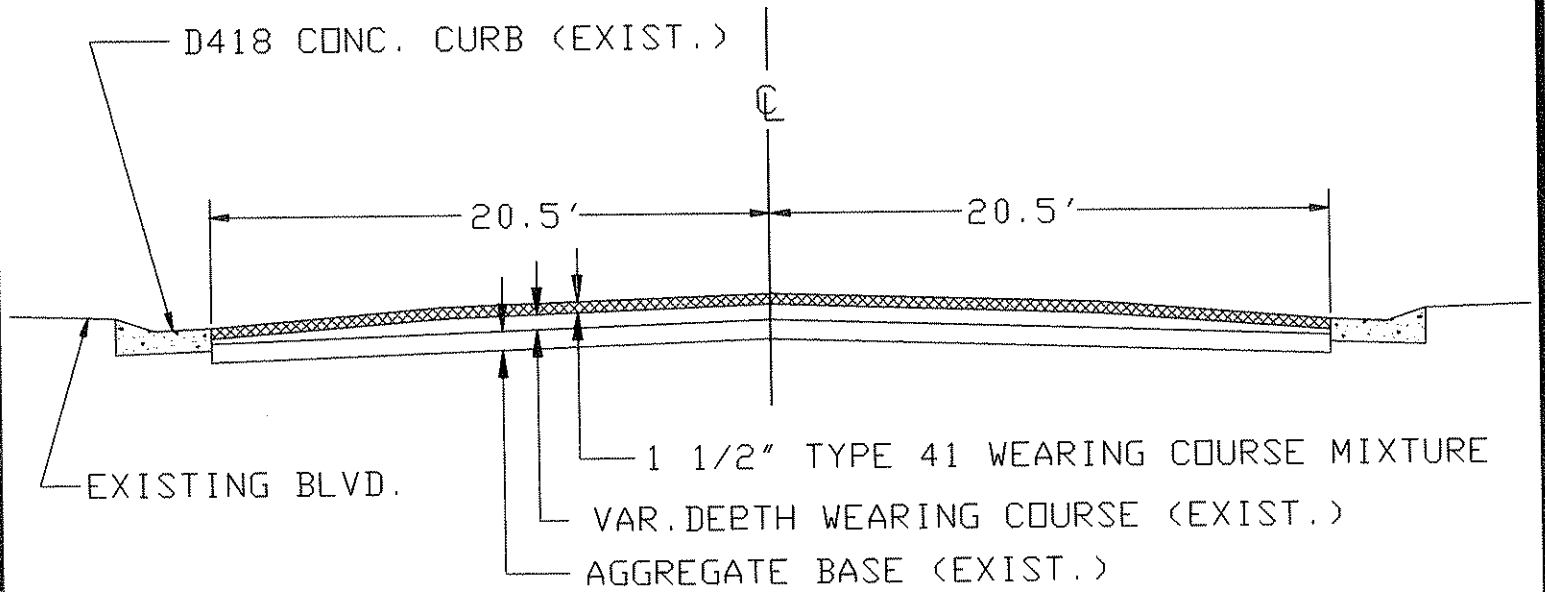


MILLING DETAILS

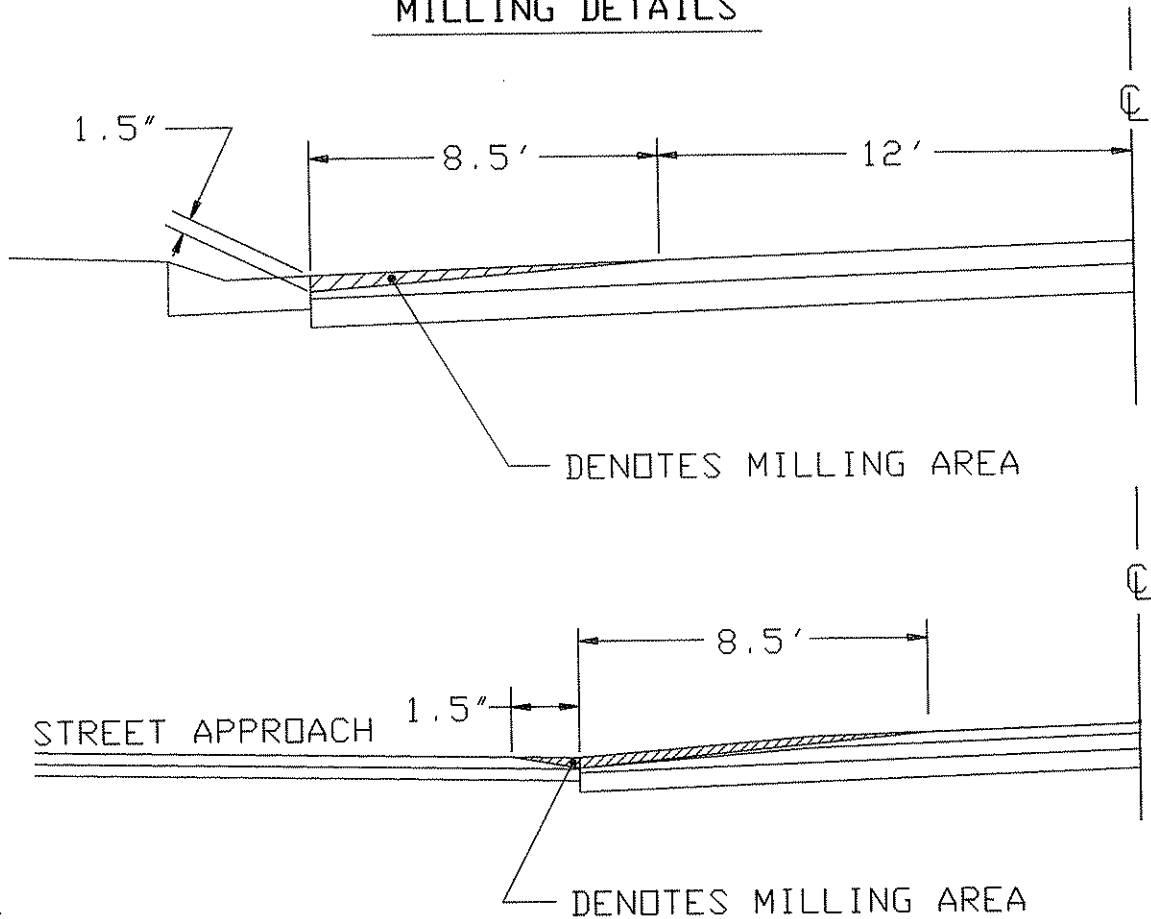

NOTE:

NOT TO SCALE

TYPICAL ENTRANCES

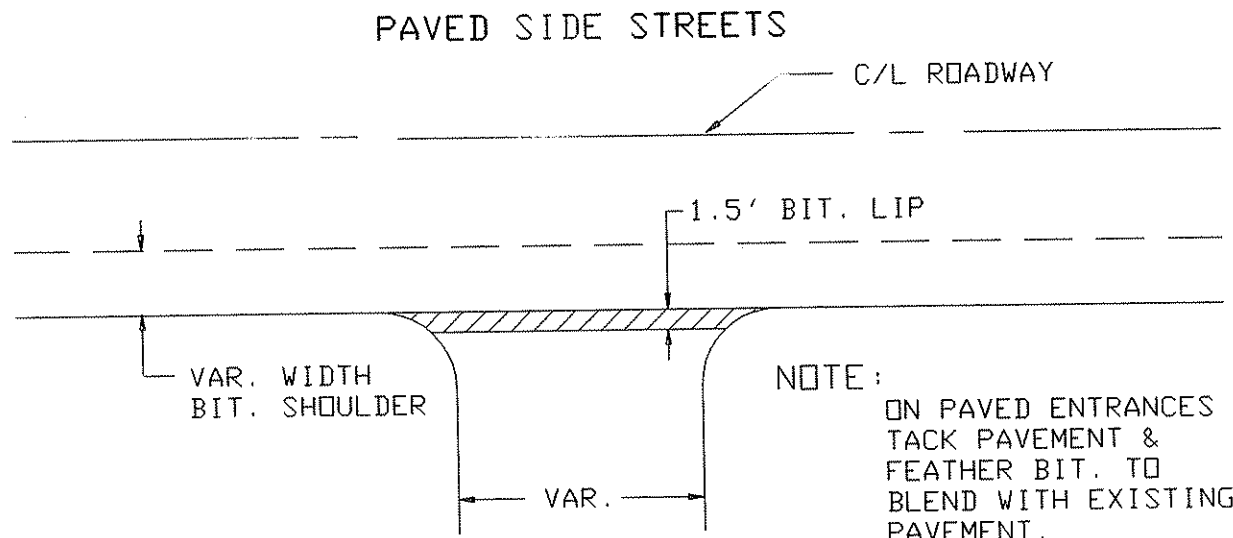

NOTE :
NOT TO SCALE