

PART TRANSVERSE SECTION


Beam Height	Dim. "A" for comp. volume	Diaph. Dim. "B"	Bar D401 Length
63"	6'-3/4"	3' 10"	8' 9"
72"	6'-5/8"	4' 7"	10' 3"
81"	6'-1/2"	5' 4"	11' 9"

Concrete Volume Per Diaphragm
 $(L - A) \times B \times 0.75 = \text{Cubic Yards}$
 27

BAR LENGTH	SHAPE	LOCATION
D401	11'-5"	Bent Diaph. Vert.
D502	8'-7"	Str. Diaph. Horz.
D503	5'-5"	Str. Diaph. Horz.

GENERAL NOTES

- For Diaphragms 20' and over, use threaded rods as shown on standard prestressed concrete beam sheet.
- All diaphragm concrete and reinforcement bars shown on this detail to be included in payment for diaphragms for prestressed beams. Threaded rods are included in payment for prestressed concrete beams.
- Reduce length of horizontal reinforcement as necessary at end block locations.
- Payment length for diaphragms.

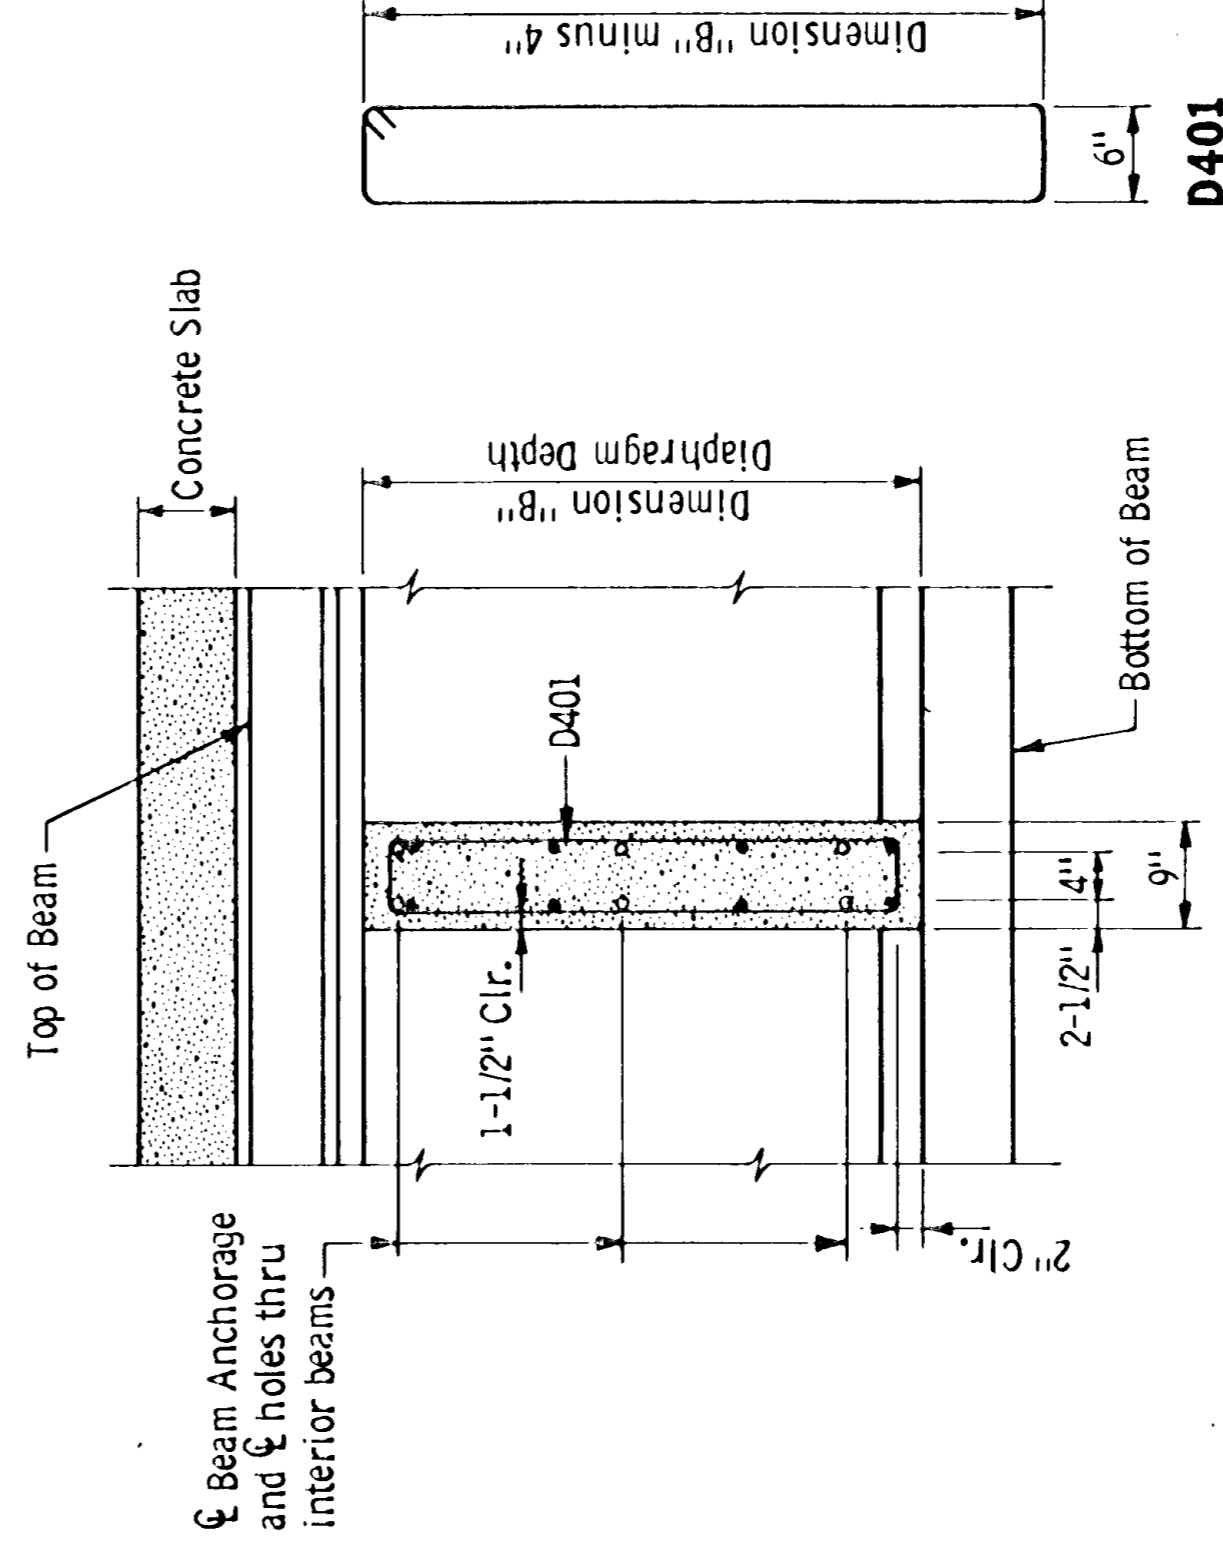


SECTION A-A

APPROVED SEPT. 28, 1977
 Developed by BRIDGE STANDARDS AND THE BRIDGES & STRUCTURES SECTION
 Issued by RESEARCH & STANDARDS


STATE OF MINNESOTA
 DEPARTMENT OF TRANSPORTATION
CONCRETE INTERMEDIATE DIAPHRAGM
 (FOR 63" - 81" PRESTRESSED CONCRETE BEAM SPANS)

REVISION
 Jan. 23, 1980
B806


DETAIL NO.

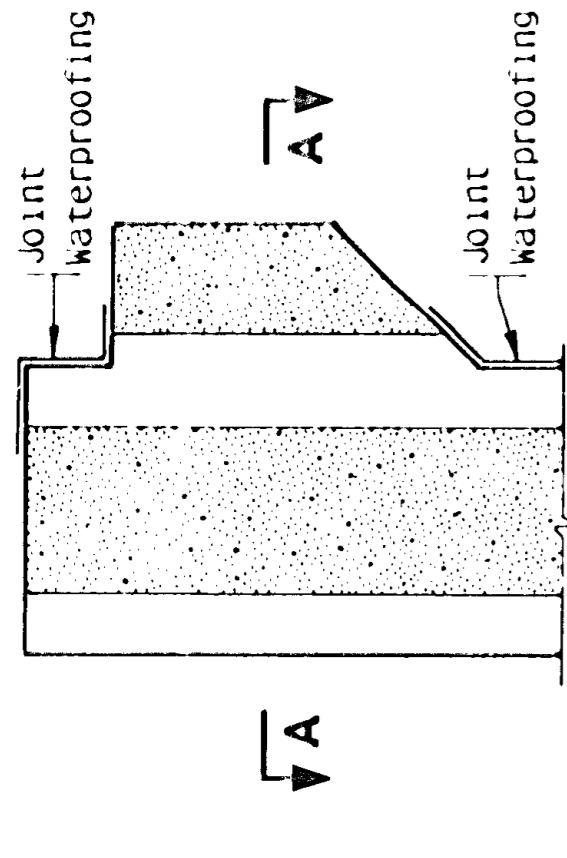


SECTION THRU PAVING BRACKET

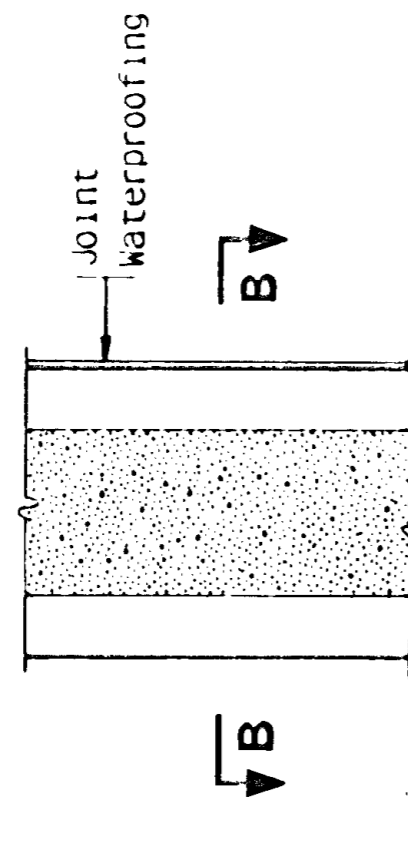


SECTION THRU WALL

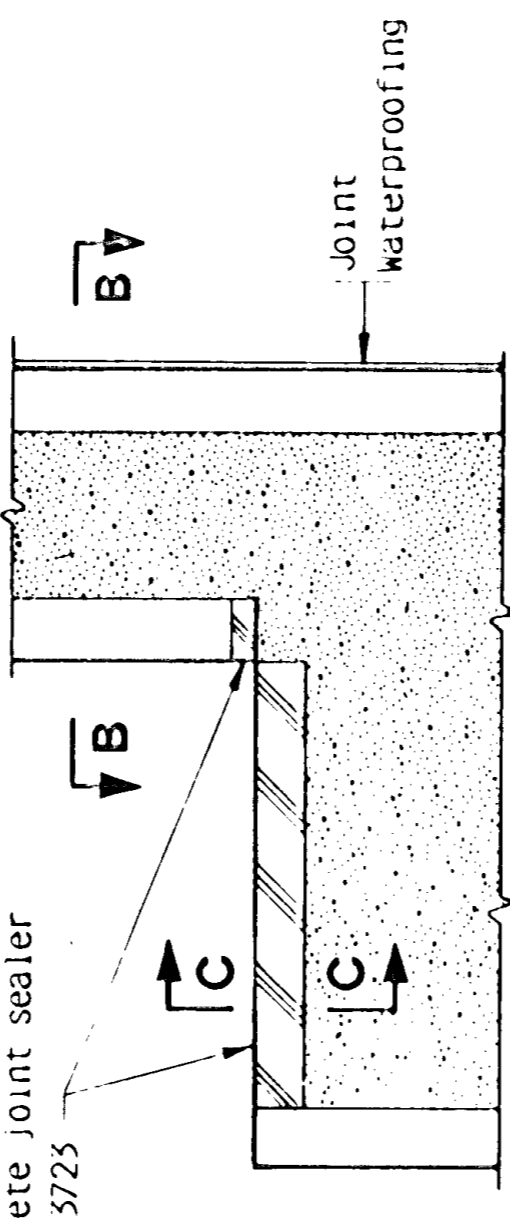

SECTION THRU BRIDGE SEAT PART SECTION THRU ABUTMENT AT JOINT

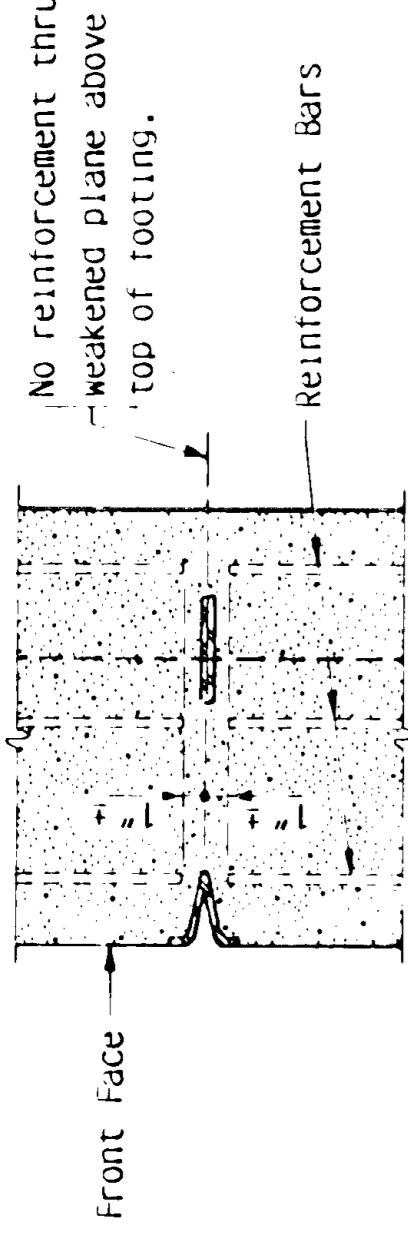


SECTION A-A

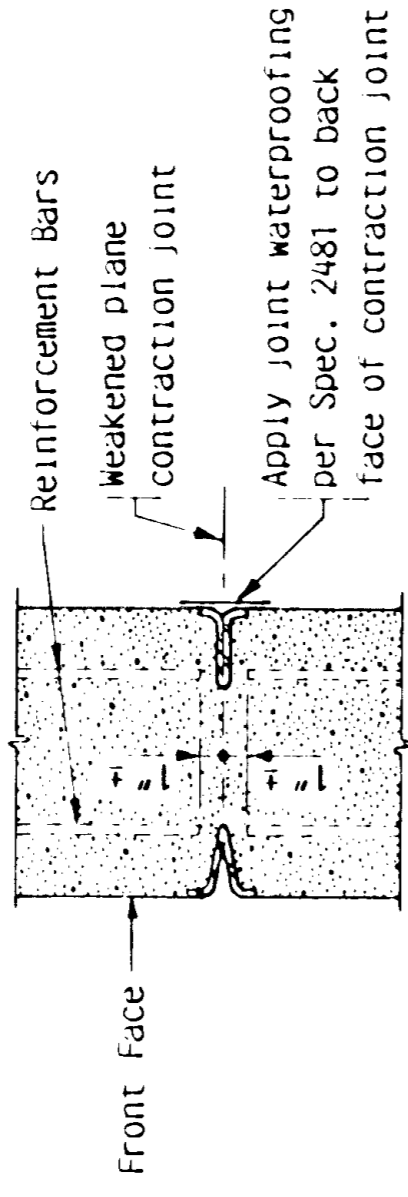


SECTION B-B


Seal across bridge seat and 1" up face of abutment with concrete joint sealer per Spec. 5725



SECTION C-C

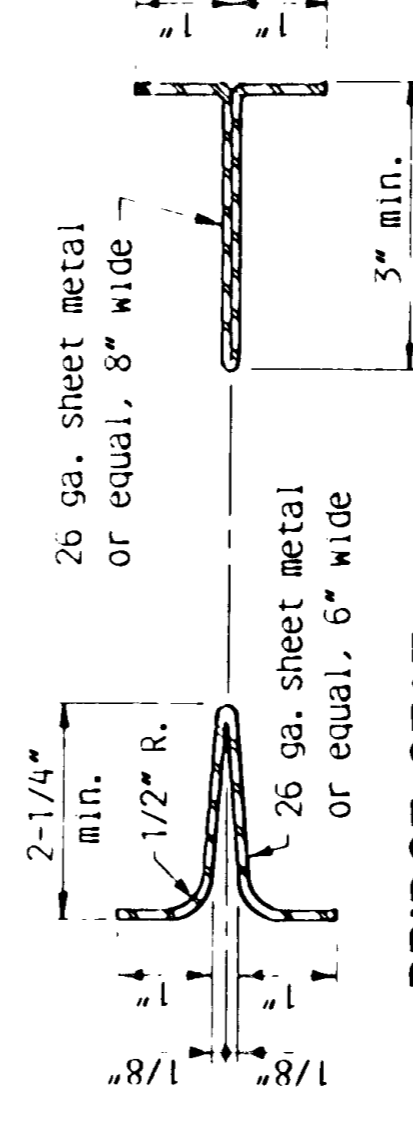

BRIDGE SEAT and FRONT STRIP and BACK STRIP

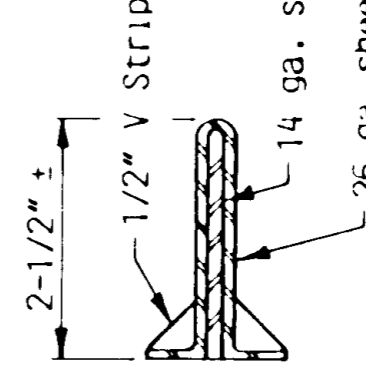

ALTERNATE BRIDGE SEAT and FRONT STRIP

NOTES:

The methods and materials indicated on this sheet shall be considered as suggested only. Variations will be permitted, subject to approval by the Engineer, but must provide dummy joints of a depth not less than the depth shown, and a width at the front face of the abutment of not greater than 5/16". The separation of the horizontal reinforcement bars shall be not less than 1-1/2" nor more than 5", centered as shown, regardless of the procedure used for forming the dummy joint.

If the front and bridge seat strips are galvanized metal, they shall be securely fastened to the forms so that they will be removed with the forms. If a suitable plastic or other durable material, satisfactory to the Engineer, is used, the material may be left in place.

The back strip may be galvanized metal, a suitable plastic, or other durable material satisfactory to the Engineer. The back strip shall remain in place after the forms are removed.

The cost of forming the joint shall be included in the price bid for other items.

APPROVED FEBRUARY 20, 1987
 Developed by ENGINEERING STANDARDS AND BRIDGES & STRUCTURES
 Issued by ENGINEERING STANDARDS

STATE OF MINNESOTA
 DEPARTMENT OF TRANSPORTATION
CONTRACTION JOINT

REVISION

B801