

ASC/2S-2100 CONTROLLER WITH:

- CONFIGURATION EEPROM 32790C1440
- SOFTWARE: V1.72
- SPECIAL SOFTWARE: SEE BELOW FUNCTION
- OVERLAPS
  - IN EEPROM
  - KEYBOARD ENTERED
- ANALOG TELEMETRY MODULE: 32825G1
- F/O TELEMETRY MODULE: 33525G1
- TEST INPUT A =
- TEST INPUT B =

A =  
B =  
C =  
D =

LEGEND

|       |                      |
|-------|----------------------|
| BIU() | BUS INTERFACE UNIT   |
| BU()  | C/C, BIU ()          |
| CB()  | CIRCUIT BREAKER ()   |
| C/C   | CONNECTING CABLE     |
| CCA   | CONTROLLER CABLE "A" |
| CDP   | C/C, DR POWER        |
| CMA   | MMU/CMU CABLE "A"    |
| CMB   | MMU/CMU CABLE "B"    |
| CPO   | C/C PRE-EMPT OUTPUTS |
| CPP   | C/C PRE-EMPT POWER   |
| DR    | DETECTOR RACK        |
| DS()  | DOOR SWITCH ()       |
| FL()  | FLASHER ()           |
| FR()  | FLASH XFER. RELAY    |
| LS()  | LOAD SWITCH          |
| MC    | MERCURY CONTACTOR    |
| MP    | MAIN PANEL           |
| PAP   | POWER-AUX PANEL      |
| PSP   | CAB. PWR. SUPPLY     |
| SA    | SURGE ARRESTOR       |
| TB-() | TERM. BLOCK ()       |

MAIN PANEL PLUG-IN REQUIREMENTS

|                     |                     |                         |                          |                          |                          |                       |                |                |                         |
|---------------------|---------------------|-------------------------|--------------------------|--------------------------|--------------------------|-----------------------|----------------|----------------|-------------------------|
| BIU2<br>T&F         | BIU3<br>T&F         | LS9<br>PED 2<br>BEACONS | LS10<br>PED 4<br>BEACONS | LS11<br>PED 6<br>BEACONS | LS12<br>PED 8<br>BEACONS | LS13<br>OL "A"        | LS14<br>OL "B" | LS15<br>OL "C" | LS16<br>OL "D"          |
| BIU1<br>T&F         | LS1<br>VEH 1        | LS2<br>VEH 2            | LS3<br>VEH 3             | LS4<br>VEH 4             | LS5<br>VEH 5             | LS6<br>VEH 6          | LS7<br>VEH 7   | LS8<br>VEH 8   | FL1<br>□ 1CKT<br>■ 2CKT |
| FR1<br>L R<br>V1 V5 | FR2<br>L R<br>V2 V6 | FR3<br>L R<br>V3 V7     | FR4<br>L R<br>V4 V8      | FR5<br>L R<br>A C        | FR6<br>L R<br>B D        | K1<br>LS 24V<br>CONT. |                |                |                         |


■ DENOTES TYPE OF OPERATION AND/OR WHERE PLUG-IN IS REQUIRED. L = LEFT, R = RIGHT.  
 ☒ DENOTES WHERE "UNUSED RED" JUMPER PART NUMBER 32448G1 IS REQUIRED. INSTALL BETWEEN PINS 1 & 3 FOR LOAD SWITCH OR PINS 6 & 8 AND 5 & 7 FOR FLASH TRANSFER RELAY.

FLASH:  
 □ ø2&6 YELLOW, ALL OTHERS RED.  
 ■ ALL RED.  
 ■ RELAYS DE-ENERGIZED FOR FLASH.  
 □ RELAYS ENERGIZED FOR FLASH.

| FLASHER |             |
|---------|-------------|
| PIN     | FUNCTION    |
| 7       | CIRCUIT #1  |
| 8       | CIRCUIT #2  |
| 9       | CHASSIS GND |
| 10      | AC COMMON   |
| 11      | 115 VAC     |
| 12      | -----       |

| LOAD SWITCH |               |
|-------------|---------------|
| PIN         | FUNCTION      |
| 1           | 115 VAC       |
| 2           | CHASSIS GND   |
| 3           | RED/DW OUTPUT |
| 4           | -----         |
| 5           | YEL OUTPUT    |
| 6           | RED/DW INPUT  |
| 7           | GRN/W OUTPUT  |
| 8           | YEL INPUT     |
| 9           | +24 VDC       |
| 10          | GRN/W INPUT   |
| 11          | AC COMMON     |
| 12          | -----         |

①  
2.2K  
10W

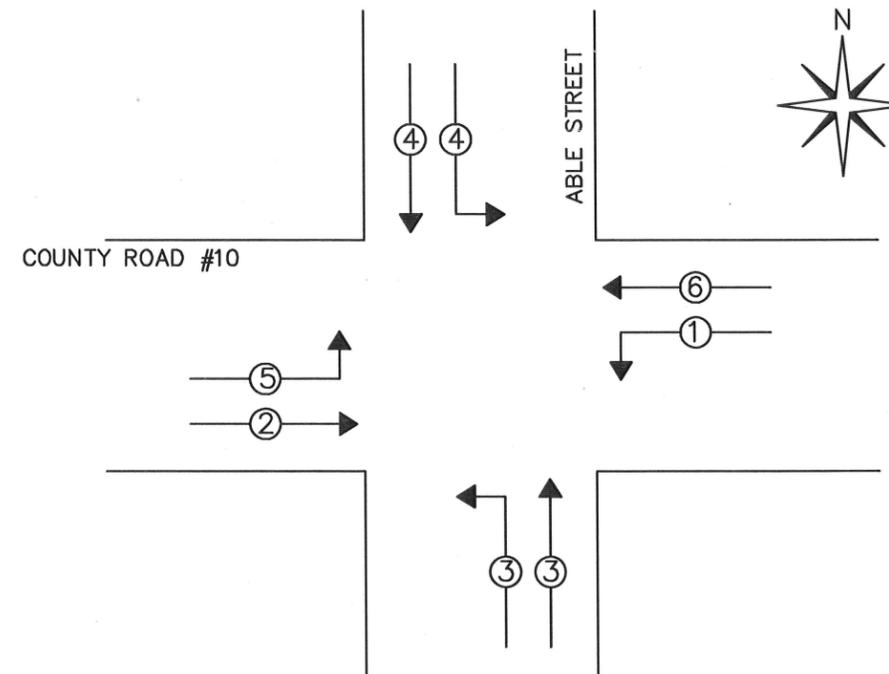


SHEET 1 OF 11



- 3 USE ONLY COPPER CONDUCTORS FOR FIELD AND SERVICE CONNECTIONS.  
 2 CONNECT A.C. SERVICE TO TERMINAL BLOCK 501 (LINE), 502 (NEUTRAL) AND GB2 (EARTH) ON RIGHT SIDEWALL OF CABINET.  
 ① INSTALL 2.2K, 10 WATT LOAD RESISTORS BETWEEN PINS 7 AND 11 ON LOAD SWITCHES 9, 10, 11 & 12.  
 NOTES: UNLESS SPECIFIED OTHERWISE

|                         |                  |   |                                    |   |
|-------------------------|------------------|---|------------------------------------|---|
| DESIGNER<br>G.V. T.C.C. | DATE<br>02/03/97 | <b>ECONOLITE</b><br>CONTROL PRODUCTS INC. | <b>TRAFFIC CONTROL CORPORATION</b> | 5653 MEMORIAL AVE.<br>OAK PARK HTS, MN 55082      |
| DRAWN<br>MA TCC         | 6/9/04           |   |                                    | CABINET SPECIFICATION: TS2TYPE1 2004 ANOKA COUNTY |
| CABINET SIZE            |                  | CUSTOMER: ANOKA COUNTY HIGHWAY DEPARTMENT |                                    | CONTROLLER  |
| INSPECTED               |                  | INTERSECTION: #10 AT ABLE                 |                                    | FLASHER   |
| APPROVED                |                  | LOCATION:                                 |                                    | SW.PACKS  |
| CUSTOMER P.O.           | INSTALLED BY     | SALES ORDER NO.                           | SIZE<br>B                          | DRAWING #TS20216PG<br>INTERC                      |






**AUXILLARY SWITCH PANEL**

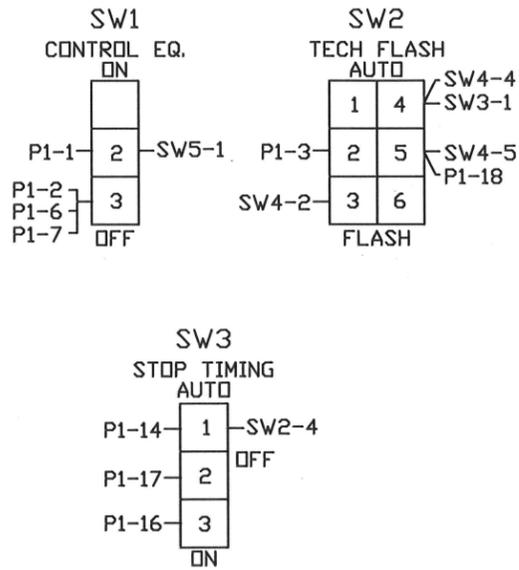

**POLICE SWITCH PANEL**

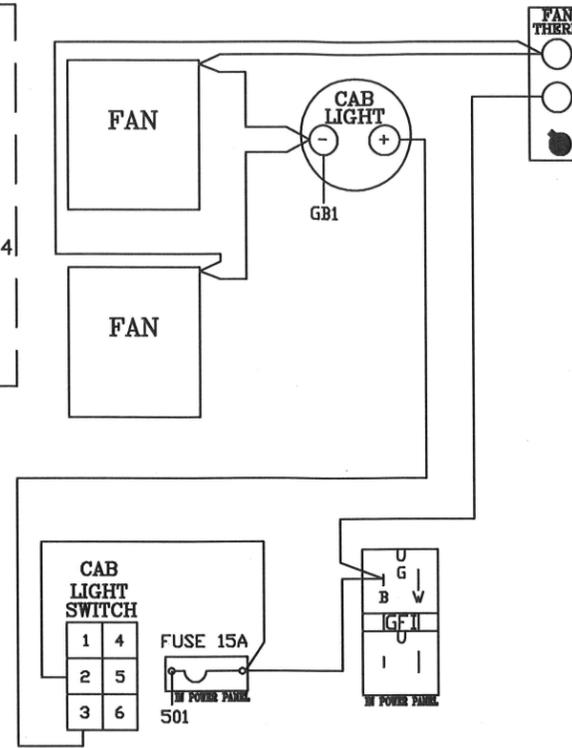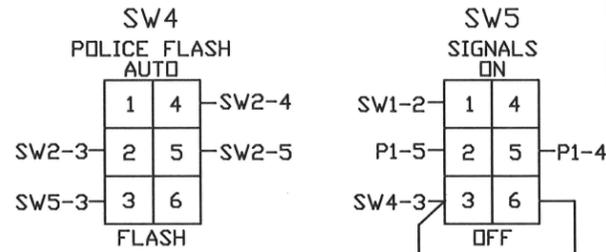


**POWER/AUX PANEL (PAP) 34830G5**

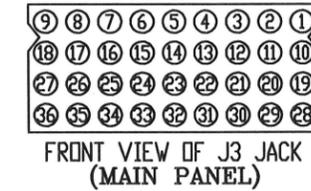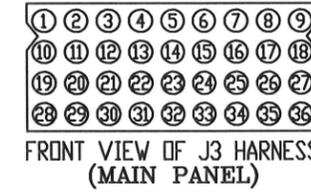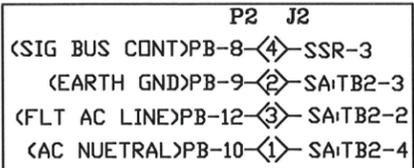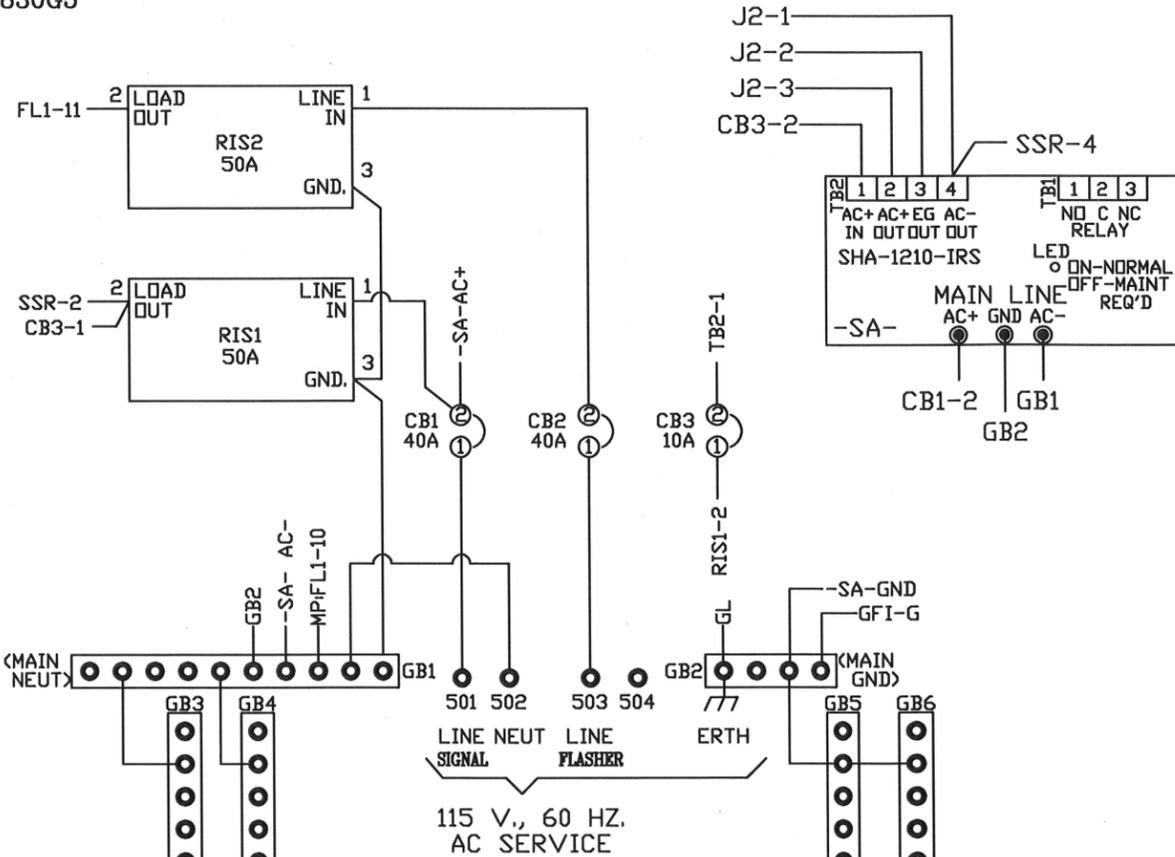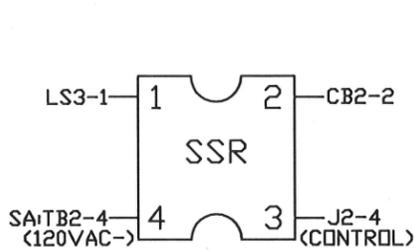


FRONT VIEW OF J1 HARNESS (SWITCH PANEL)



FRONT VIEW OF J1 JACK (SWITCH PANEL)



FRONT VIEW OF J1-J6 HARNESSSES (POWER BUS PANEL)



FRONT VIEW OF J1-J6 JACKS (POWER BUS PANEL)

| J3     | P1                              |       |       |
|--------|---------------------------------|-------|-------|
| J3-36  | 1 FILTER AC LINE (OUT)          | P1-1  | SW1-2 |
| MMB-1  | 2 SWITCHED AC LINE (IN)         | P1-2  | SW1-3 |
| MMA-37 | 3 FLASH CONTROL BUS (OUT)       | P1-3  | SW2-3 |
| K1-10  | 4 SIGNAL BUS CONTROL (IN)       | P1-4  | SW5-5 |
| FR6-2  | 5 FLASH RELAY CONTROL (IN)      | P1-5  | SW5-2 |
| MMB-2  | 6 START DELAY AC BUS (IN)       | P1-6  | SW1-3 |
| MMA-20 | 7 MMU FLASH CONTROL BUS (IN)    | P1-7  | SW1-3 |
|        | 8 SPARE                         | P1-8  | ----  |
|        | 9 SPARE                         | P1-9  | ----  |
|        | 10 SPARE                        | P1-10 | ----  |
|        | 11 SPARE                        | P1-11 | ----  |
|        | 12 SPARE                        | P1-12 | ----  |
| A-39   | 13 OPT-MANUAL CONT. ENABLE (IN) | P1-13 | ----  |
| A-35   | 14 LOGIC GROUND                 | P1-14 | SW3-1 |
| A-40   | 15 OPT-INTERVAL ADVANCE (IN)    | P1-15 | ----  |
| A-31   | 16 MMU STOP TIME (OUT)          | P1-16 | SW3-3 |
| A-30   | 17 CONTROLLER STOP TIME (IN)    | P1-17 | SW3-2 |
| A-32   | 18 LOCAL FLASH STATUS (IN)      | P1-18 | SW2-5 |
| A-38   | 19 OPT-COORD FREE (IN)          | P1-19 | ----  |
| A-33   | 20 OPT-ALARM 1 (IN)             | P1-20 | ----  |
| A-34   | 21 OPT-ALARM 2 (IN)             | P1-21 | ----  |
| K1-9   | 22 OPT-LOADSWITCH TEST (IN)     | P1-22 | ----  |
| B-3    | 23 MMU 24V MON. 2 (IN)          | P1-23 | ----  |
| B-4    | 24 +24 VDC                      | P1-24 | ----  |


TO POL/AUX P1

TO PB J1



| J3     | J1                            |       |        |
|--------|-------------------------------|-------|--------|
| A-35   | 25 LOGIC GROUND               | J1-1  | TB1-1  |
| K1-11  | 26 +24 VDC (IN)               | J1-2  | TB1-2  |
|        | 27 ----                       | J1-3  | TB1-3  |
| B-5    | 28 MMU FAULT MONITOR (IN)     | J1-4  | TB1-4  |
| J1-31B | 29 LINE FREQ. REFERENCE (IN)  | J1-5  | TB1-5  |
|        | 30 ----                       | J1-6  | TB1-6  |
| J1-27B | 31 +12 VAC (IN)               | J1-7  | TB1-7  |
| K1-10  | 32 SIGNAL BUS CONTROL (IN)    | J1-8  | TB1-8  |
|        | 33 ----                       | J1-9  | TB1-9  |
| K1-2   | 34 FILTERED AC NEUTRAL (IN)   | J1-10 | TB1-10 |
| MMB-18 | 35 CONT. EQUIP. AC LINE (OUT) | J1-11 | TB1-11 |
| J3-1   | 36 FILTERED AC LINE (IN)      | J1-12 | TB1-12 |

# CONFIRMATION BEACONS




EVP 3 = 1-6  
 EVP 4 = 2-5  
 EVP 5 = 3  
 EVP 6 = 4

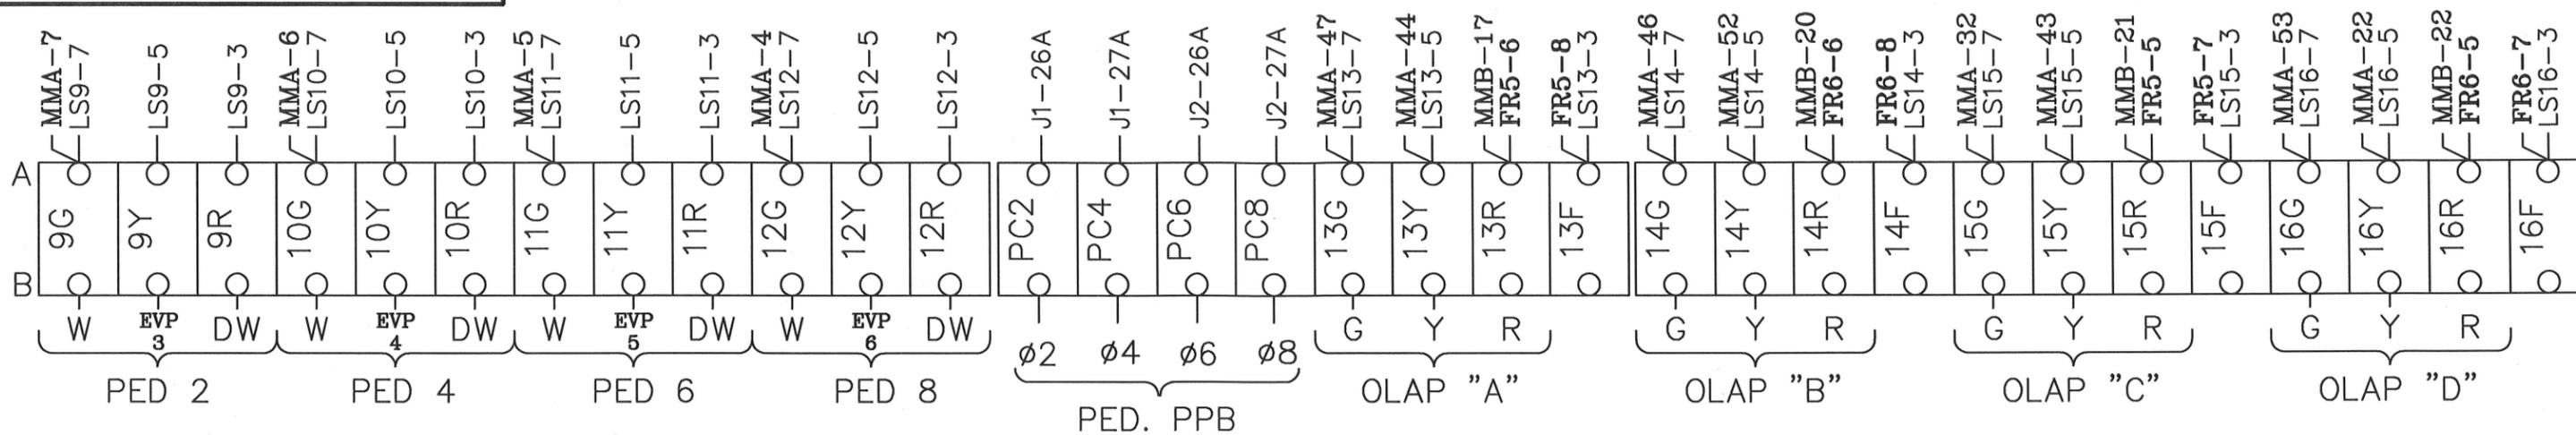

(P.B. COMMON TO GB1)

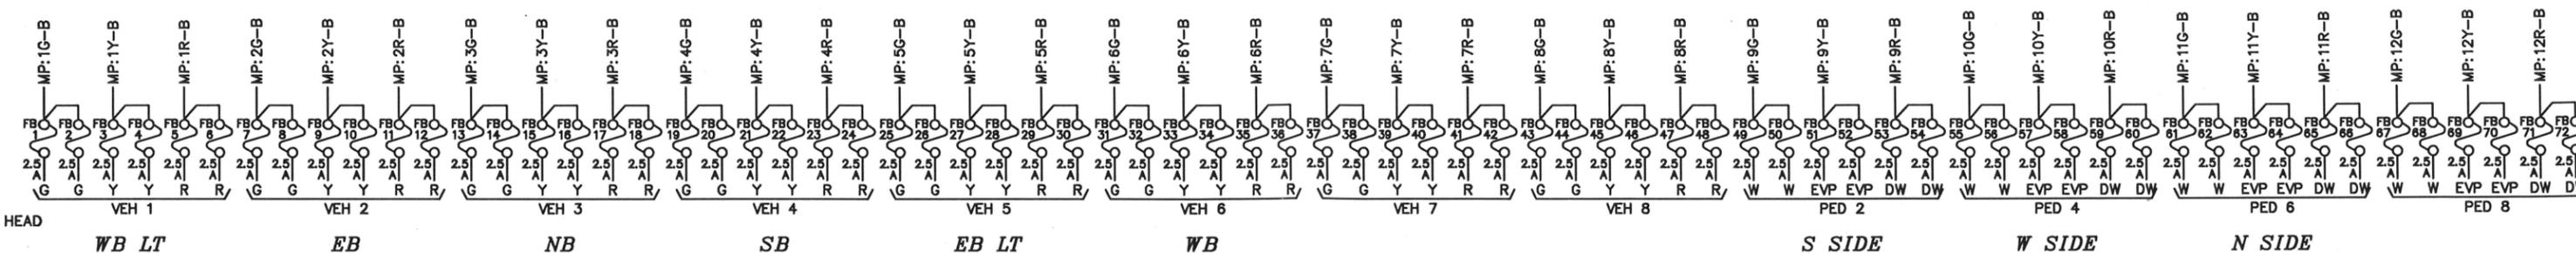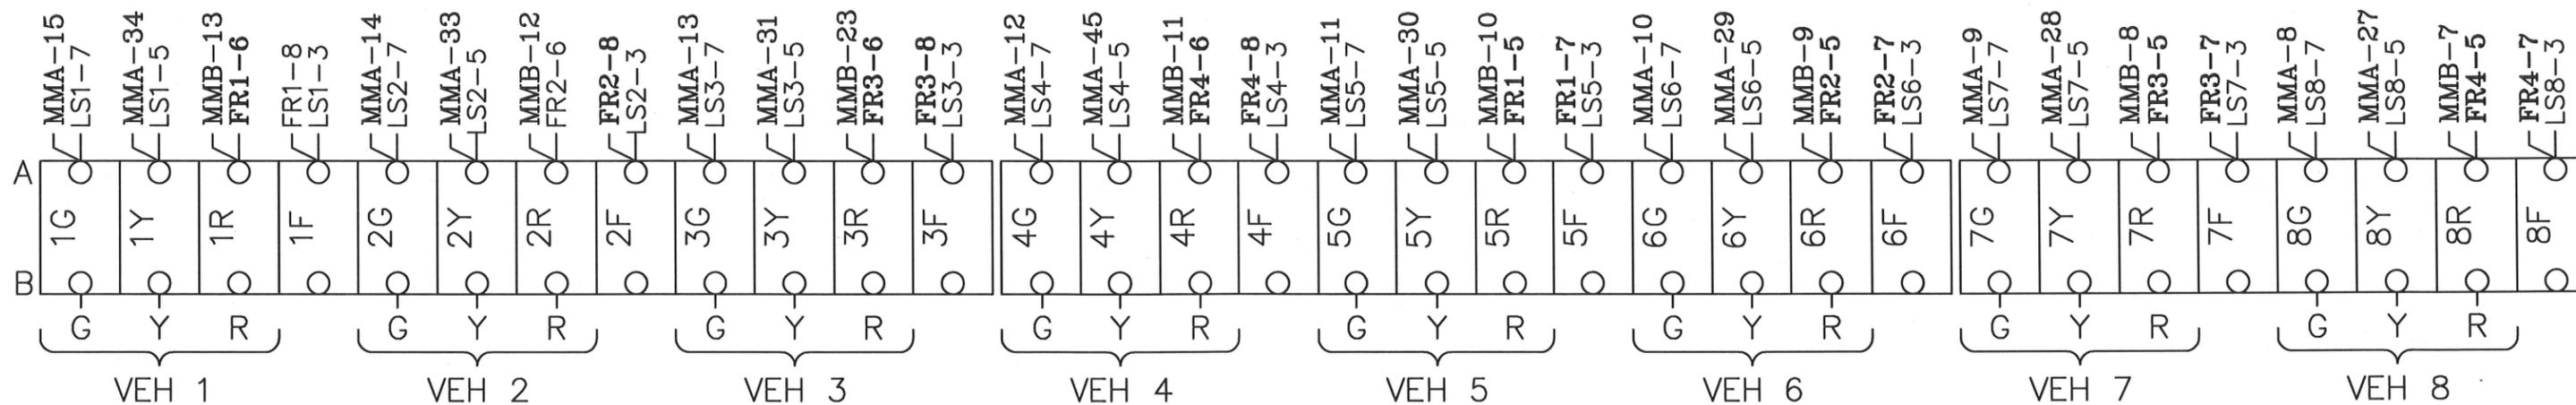

⊕  
2.2K  
10W

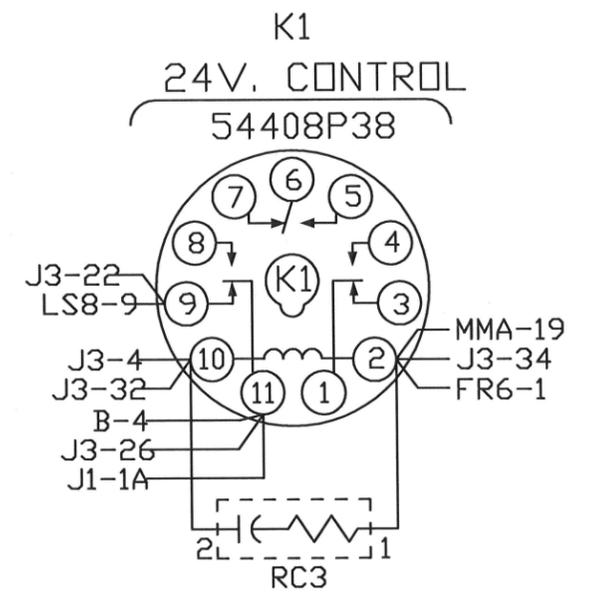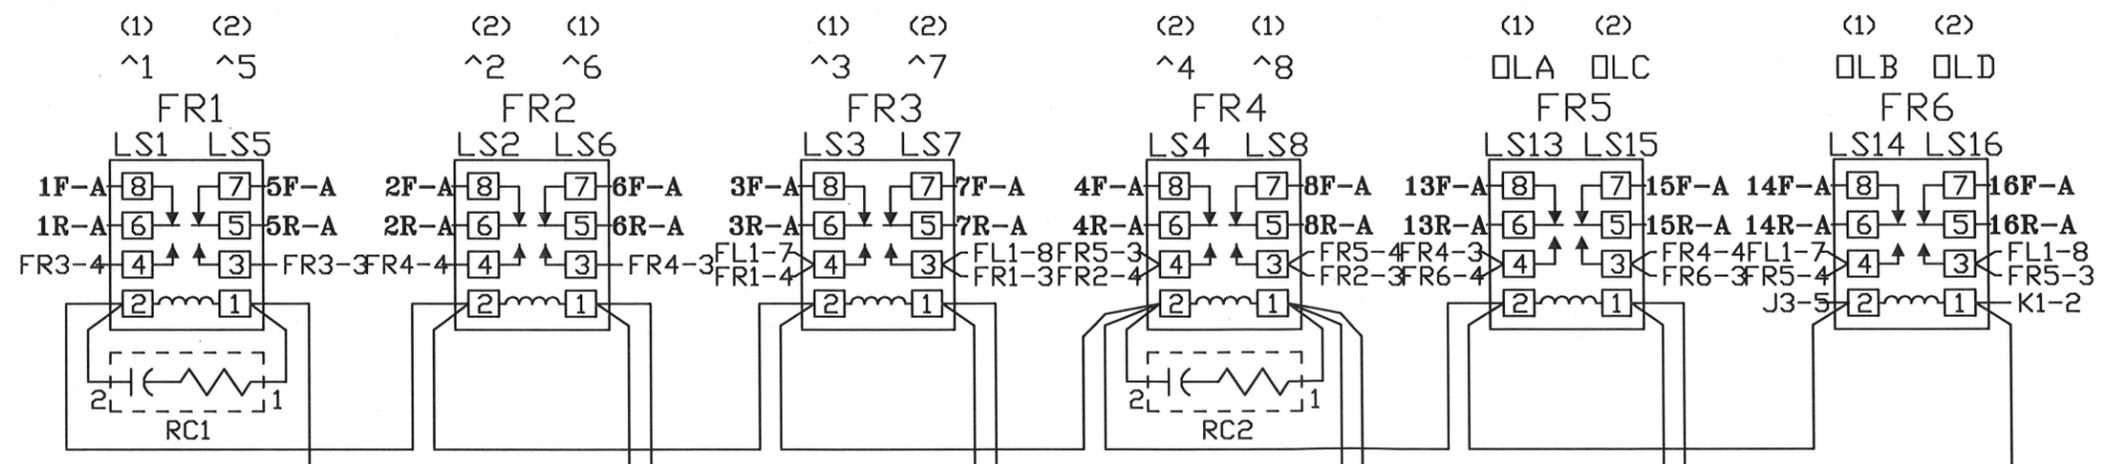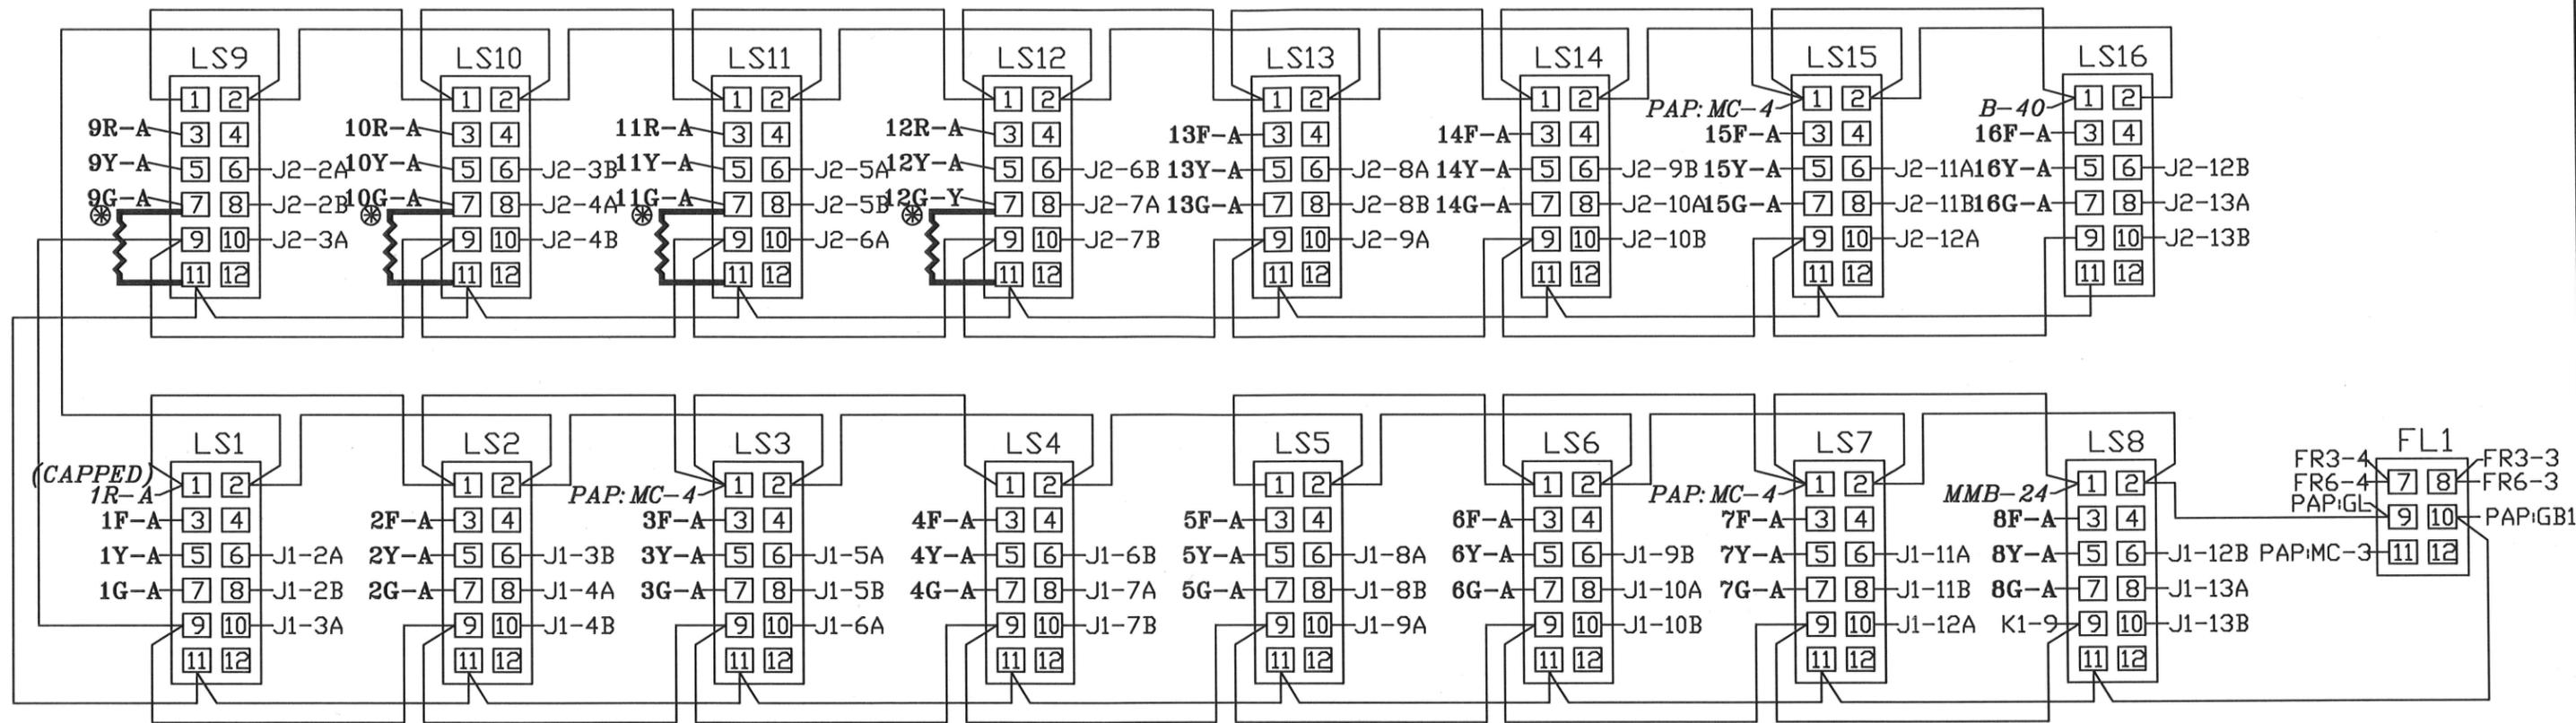

LOADBAY AND FLASH RELAY'S

|   |    |                      |        |        |                   |
|---|----|----------------------|--------|--------|-------------------|
| B | 1  | M.M.U. RESET         | MMA-49 | J2-21B | RG. 1 INHBT. MAX. |
|   | 2  | 24 V. MON. INHBT.    | MMA-36 | J2-22A | RG. 2 INHBT. MAX. |
|   | 3  | M.M.U. +24 V. MON. 2 | J3-23  | J1-23B | RG. 1 FORCE OFF   |
|   | 4  | M.M.U. +24 V. MON. 1 | K1-11  | J1-24A | RG. 2 FORCE OFF   |
|   | 5  | FAULT MON.           | J3-28  | J1-22B | RG. 1 MAX. 2 SEL. |
|   | 6  | PC1 PED. DET. 1      | J1-25B | J1-23A | RG. 2 MAX. 2 SEL. |
|   | 7  | PC3 PED. DET. 3      | J1-26B | J1-24B | CALL NON-ACC. 1   |
|   | 8  | PC5 PED. DET. 5      | J2-25B | J2-19A | CALL NON-ACC. 2   |
|   | 9  | PC7 PED. DET. 7      | J2-26B | J1-25A | WALK REST MDR.    |
|   | 10 | B.I.U. SPR. 1        | J2-19B | J1-20A | EXT. MIN. RECALL  |
|   | 11 | B.I.U. SPR. 2        | J2-20A | J1-20B | EXT. START        |
|   | 12 | B.I.U. SPR. 3        | J2-20B | J1-17A | TEST INPUT A      |
|   | 13 | B.I.U. SPR. 4        | J2-21A | J1-17B | TEST INPUT B      |
|   | 14 | LOGIC GND.           | MMA-17 | J2-25A | TEST INPUT C      |
|   | 15 | PMT. CALL 1          | J1-16A | J1-21A | T.B.C. ON LINE    |
|   | 16 | PMT. CALL 2          | J1-16B | J1-14A | T.B.C. AUX. 1     |
|   | 17 | PMT. CALL 3          | J2-17A | J1-14B | T.B.C. AUX. 2     |
|   | 18 | PMT. CALL 4          | J2-17B | J2-14A | T.B.C. AUX. 3     |
|   | 19 | PMT. CALL 5          | J2-18A | J2-14B | COORD. STATUS OUT |
|   | 20 | PMT. CALL 6          | J2-18B | MMA-55 | LOGIC GND.        |
|   |    |                      |        | A-27   |                   |

J16-19  
J16-20  
J16-17  
J16-18

|  |    |              |        |        |                     |
|--|----|--------------|--------|--------|---------------------|
|  | 21 | MMA AC+ I IN | MMA-1  | J1-15A | PMT. 1 ACTV.        |
|  | 22 | DR1 OPEN     | MMA-2  | J1-15B | PMT. 2 ACTV.        |
|  | 23 | DR2 CLSD     | MMA-3  | J2-15A | PMT. 3 ACTV.        |
|  | 24 | MMA SPR 1    | MMA-48 | J2-15B | PMT. 4 ACTV.        |
|  | 25 | CAB INTLK A  | MMA-50 | J2-16A | PMT. 5 ACTV.        |
|  | 26 | CAB INTLK B  | MMA-51 | J2-16B | PMT. 6 ACTV.        |
|  | 27 | MMA SPR 2    | MMA-21 | MMA-54 | LOGIC GND           |
|  | 28 | SDR OPEN     | MMA-54 | A-20   | LOGIC GND           |
|  | 29 | MMB SPR 1    | MMA-54 | A-35   | LOGIC GND           |
|  | 30 | MMB SPR 2    | MMB-3  |        | STOP TIMING 1 & 2   |
|  | 31 | MMB SPR 3    | MMB-14 |        | MMU STOP TIMING     |
|  | 32 |              | J1-21B | J1-22A | LOCAL FLASH STATUS  |
|  | 33 |              | J3-17  | J3-17  | ALARM 1             |
|  | 34 |              | J2-22B | J3-18  | ALARM 2             |
|  | 35 |              | J3-18  | J2-23B | LOGIC GND           |
|  | 36 |              | J3-20  | J3-20  | DIM. ENABLE         |
|  | 37 | AC+          | J2-24A | J3-21  | AUTO FLASH          |
|  | 38 | AC+          | J3-21  | A-27   | COORD. FREE         |
|  | 39 | AC+          | J3-25  | J3-14  | MANUAL CONT. ENABLE |
|  | 40 | AC+          | J3-14  | J3-14  | INTRV. ADV.         |

INTERFACE TERMINAL BLOCKS

| BIU #1 |                  |        | BIU #2 |                 |         |
|--------|------------------|--------|--------|-----------------|---------|
| PIN    | FUNCTION         | TO     | PIN    | FUNCTION        | TO      |
| 1A     | +24 VDC          | K1-11  | 1A     | +24 VDC         | J2-1B   |
| 1B     | +24 VDC          | J2-1B  | 1B     | +24 VDC         | J1-1B   |
| 2A     | LS1 RED          | LS1-6  | 2A     | LS9 RED         | LS9-6   |
| 2B     | LS1 YELLOW       | LS1-8  | 2B     | LS9 YELLOW      | LS9-8   |
| 3A     | LS1 GREEN        | LS1-10 | 3A     | LS9 GREEN       | LS9-10  |
| 3B     | LS2 RED          | LS2-6  | 3B     | LS10 RED        | LS10-6  |
| 4A     | LS2 YELLOW       | LS2-8  | 4A     | LS10 YELLOW     | LS10-8  |
| 4B     | LS2 GREEN        | LS2-10 | 4B     | LS10 GREEN      | LS10-10 |
| 5A     | LS3 RED          | LS3-6  | 5A     | LS11 RED        | LS11-6  |
| 5B     | LS3 YELLOW       | LS3-8  | 5B     | LS11 YELLOW     | LS11-8  |
| 6A     | LS3 GREEN        | LS3-10 | 6A     | LS11 GREEN      | LS11-10 |
| 6B     | LS4 RED          | LS4-6  | 6B     | LS12 RED        | LS12-6  |
| 7A     | LS4 YELLOW       | LS4-8  | 7A     | LS12 YELLOW     | LS12-8  |
| 7B     | LS4 GREEN        | LS4-10 | 7B     | LS12 GREEN      | LS12-10 |
| 8A     | LS5 RED          | LS5-6  | 8A     | LS13 RED        | LS13-6  |
| 8B     | LS5 YELLOW       | LS5-8  | 8B     | LS13 YELLOW     | LS13-8  |
| 9A     | LS5 GREEN        | LS5-10 | 9A     | LS13 GREEN      | LS13-10 |
| 9B     | LS6 RED          | LS6-6  | 9B     | LS14 RED        | LS14-6  |
| 10A    | LS6 YELLOW       | LS6-8  | 10A    | LS14 YELLOW     | LS14-8  |
| 10B    | LS6 GREEN        | LS6-10 | 10B    | LS14 GREEN      | LS14-10 |
| 11A    | LS7 RED          | LS7-6  | 11A    | LS15 RED        | LS15-6  |
| 11B    | LS7 YELLOW       | LS7-8  | 11B    | LS15 YELLOW     | LS15-8  |
| 12A    | LS7 GREEN        | LS7-10 | 12A    | LS15 GREEN      | LS15-10 |
| 12B    | LS8 RED          | LS8-6  | 12B    | LS16-RED        | LS16-6  |
| 13A    | LS8 YELLOW       | LS8-8  | 13A    | LS16-YELLOW     | LS16-8  |
| 13B    | LS8 GREEN        | LS8-10 | 13B    | LS16-GREEN      | LS16-10 |
| 14A    | TBC AUX 1        | A-16   | 14A    | TBC AUX 3       | A-18    |
| 14B    | TBC AUX 2        | A-17   | 14B    | COORD. STATUS   | A-19    |
| 15A    | PMT ACT 1        | A-21   | 15A    | PMT ACT 3       | A-23    |
| 15B    | PMT ACT 2        | A-22   | 15B    | PMT ACT 4       | A-24    |
| 16A    | PMT CALL 1       | B-15   | 16A    | PMT ACT 5       | A-25    |
| 16B    | PMT CALL 2       | B-16   | 16B    | PMT ACT 6       | A-26    |
| 17A    | TEST A           | A-12   | 17A    | PMT CALL 3      | B-17    |
| 17B    | TEST B           | A-13   | 17B    | PMT CALL 4      | B-18    |
| 18A    | AUTO FLASH       | A-37   | 18A    | PMT CALL 5      | B-19    |
| 18B    | DIM. ENABLE      | A-36   | 18B    | PMT CALL 6      | B-20    |
| 19A    | MANUAL CONT.     | A-39   | 19A    | CNA 2           | A-8     |
| 19B    | INT. ADVANCE     | A-40   | 19B    | SPARE 1         | B-10    |
| 20A    | EXT. MIN. RECALL | A-10   | 20A    | SPARE 2         | B-11    |
| 20B    | EXT. START       | A-11   | 20B    | SPARE 3         | B-12    |
| 21A    | TBC ONLINE       | A-15   | 21A    | SPARE 4         | B-13    |
| 21B    | STOP TIME (1)    | A-30   | 21B    | INHIBIT MAX (1) | A-1     |
| 22A    | STOP TIME (2)    | A-30   | 22A    | INHIBIT MAX (2) | A-2     |
| 22B    | MAX. 2 (1)       | A-5    | 22B    | LOCAL FLASH     | A-32    |
| 23A    | MAX. 2 (2)       | A-6    | 23A    | AMMU FLASH      | A-31    |
| 23B    | FORCE OFF (1)    | A-3    | 23B    | ALARM 1         | A-33    |
| 24A    | FORCE OFF (2)    | A-4    | 24A    | ALARM 2         | A-34    |
| 24B    | CNA 1            | A-7    | 24B    | COORD FREE IN   | A-38    |
| 25A    | WALK REST MOD.   | A-9    | 25A    | TEST C          | A-14    |
| 25B    | PED. ISD. 1      | B-6    | 25B    | PED. ISD. 5     | B-8     |
| 26A    | PED. ISD. 2      | PC2-A  | 26A    | PED. ISD. 6     | PC6-A   |
| 26B    | PED. ISD. 3      | B-7    | 26B    | PED. ISD. 7     | B-9     |
| 27A    | PED. ISD. 4      | PC4-A  | 27A    | PED. ISD. 8     | PC8-A   |
| 27B    | PED. ISD. COMN.  | J3-31  | 27B    | PED. ISD. COMN. | J1-27B  |
| 28A    | ADDR. SEL. 0     | -----  | 28A    | ADDR. SEL. 0    | J2-32A  |
| 28B    | ADDR. SEL. 1     | -----  | 28B    | ADDR. SEL. 1    | -----   |
| 29A    | ADDR. SEL. 2     | -----  | 29A    | ADDR. SEL. 2    | -----   |
| 29B    | ADDR. SEL. 3     | -----  | 29B    | ADDR. SEL. 3    | -----   |
| 30A    | RESERVED         | -----  | 30A    | RESERVED        | -----   |
| 30B    | RESERVED         | -----  | 30B    | RESERVED        | -----   |
| 31A    | EARTH GND.       | LS12-2 | 31A    | EARTH GND.      | J1-31A  |
| 31B    | LINE FREQ. REF.  | J3-29  | 31B    | LINE FREQ. REF. | J1-31B  |
| 32A    | LOGIC GND.       | B-14   | 32A    | LOGIC GND.      | J1-32B  |
| 32B    | LOGIC GND.       | J2-32A | 32B    | LOGIC GND.      | J2-32A  |

| MAIN PANEL CONTROL POWER<br>C/C 34842G4 |                            |
|---|----------------------------|
| PIN                                     | FUNCTION                   |
| 1                                       | LOGIC GROUND               |
| 2                                       | +24 VDC (IN)               |
| 3                                       | -----                      |
| 4                                       | MMU FAULT MONITOR (IN)     |
| 5                                       | LINE FREQ. REFERENCE (IN)  |
| 6                                       | -----                      |
| 7                                       | +12 VAC (IN)               |
| 8                                       | SIGNAL BUS CONTROL (IN)    |
| 9                                       | -----                      |
| 10                                      | FILTERED AC NEUTRAL (IN)   |
| 11                                      | CONT. EQUIP. AC LINE (OUT) |
| 12                                      | FILTERED AC LINE (IN)      |




| CONTROLLER POWER (CCA2)<br>C/C 34842G3 |     |               |        |
|--|-----|---------------|--------|
| WIRE                                   | PIN | SIGNAL        | TO     |
| 1                                      | A   | FAULT MONITOR | PB-4   |
| 2                                      | U   | AC NEUTRAL    | PB-10  |
| 3                                      | V   | EARTH GROUND  | PB-9   |
| 4                                      | W   | LOGIC GROUND  | PB-1   |
| 5                                      | P   | AC LINE       | PB-11  |
| 6                                      | SHL | EARTH GROUND  | CCA2-V |

| TYPE 1 CONTROLLER POWER<br>C/C 34842G2 |            |       |
|--|------------|-------|
| PIN                                    | FUNCTION   | TO    |
| A                                      | AC NEUTRAL | PB-10 |
| B                                      | -----      | ----- |
| C                                      | AC LINE    | PB-11 |
| D                                      | -----      | ----- |
| E                                      | +12 VDC    | PB-3  |
| F                                      | +24 VDC    | PB-2  |
| G                                      | RESERVED   | ----- |
| H                                      | LOGIC GND. | PB-1  |
| I                                      | EARTH GND. | PB-9  |
| J                                      | +12 VAC    | PB-7  |
| SHL                                    | RESERVED   | ----- |
| SHL                                    | EARTH GND. | PIN H |

| CABINET POWER SUPPLY<br>C/C 34842G1 |                     |       |
|-------------------------------------|---------------------|-------|
| PIN                                 | FUNCTION            | TO    |
| A                                   | AC NEUTRAL          | PB-10 |
| B                                   | LINE FREQUENCY REF. | PB-5  |
| C                                   | AC LINE             | PB-11 |
| D                                   | +12 VDC             | PB-3  |
| E                                   | +24 VDC             | PB-2  |
| F                                   | RESERVED            | ----- |
| G                                   | LOGIC GND.          | PB-1  |
| H                                   | EARTH GND.          | PB-9  |
| I                                   | +12 VAC             | PB-7  |
| J                                   | RESERVED            | ----- |
| SHL                                 | EARTH GND.          | PIN H |

| CONTROLLER PORT 1 CONNECTOR |                 |             |           |
|-----------------------------|-----------------|-------------|-----------|
| PIN                         | SIGNAL          | TO          | FUNCTION  |
| 1                           | TWISTED PAIR 1+ | SDLC-1      | CONT TXD+ |
| 2                           | LOGIC GND.      | -----       | -----     |
| 3                           | TWISTED PAIR 2+ | SDLC-4      | CONT TXC+ |
| 4                           | LOGIC GND.      | -----       | -----     |
| 5                           | TWISTED PAIR 3+ | SDLC-7      | CONT RXD+ |
| 6                           | LOGIC GND.      | -----       | -----     |
| 7                           | TWISTED PAIR 4+ | SDLC-10     | CONT RXC+ |
| 8                           | LOGIC GND.      | -----       | -----     |
| 9                           | TWISTED PAIR 1- | SDLC-2      | CONT TXD- |
| 10                          | PORT 1 DISABLE  | -----       | -----     |
| 11                          | TWISTED PAIR 2- | SDLC-5      | CONT TXC- |
| 12                          | EARTH GND.      | SHIELD WIRE | -----     |
| 13                          | TWISTED PAIR 3- | SDLC-8      | CONT RXD- |
| 14                          | RESERVED        | -----       | -----     |
| 15                          | TWISTED PAIR 4- | SDLC-11     | CONT RXC- |

| MMU & BIU PORT 1 CONNECTOR |                 |             |          |
|----------------------------|-----------------|-------------|----------|
| PIN                        | SIGNAL          | TO          | FUNCTION |
| 1                          | TWISTED PAIR 1+ | SDLC-1      | BIU RXD+ |
| 2                          | LOGIC GND.      | -----       | -----    |
| 3                          | TWISTED PAIR 2+ | SDLC-4      | BIU RXC+ |
| 4                          | LOGIC GND.      | -----       | -----    |
| 5                          | TWISTED PAIR 3+ | SDLC-7      | BIU TXD+ |
| 6                          | LOGIC GND.      | -----       | -----    |
| 7                          | TWISTED PAIR 4+ | SDLC-10     | BIU TXC+ |
| 8                          | LOGIC GND.      | -----       | -----    |
| 9                          | TWISTED PAIR 1- | SDLC-2      | BIU RXD- |
| 10                         | PORT 1 DISABLE  | -----       | -----    |
| 11                         | TWISTED PAIR 2- | SDLC-5      | BIU RXC- |
| 12                         | EARTH GND.      | SHIELD WIRE | -----    |
| 13                         | TWISTED PAIR 3- | SDLC-8      | BIU TXD- |
| 14                         | RESERVED        | -----       | -----    |
| 15                         | TWISTED PAIR 4- | SDLC-11     | BIU TXC- |

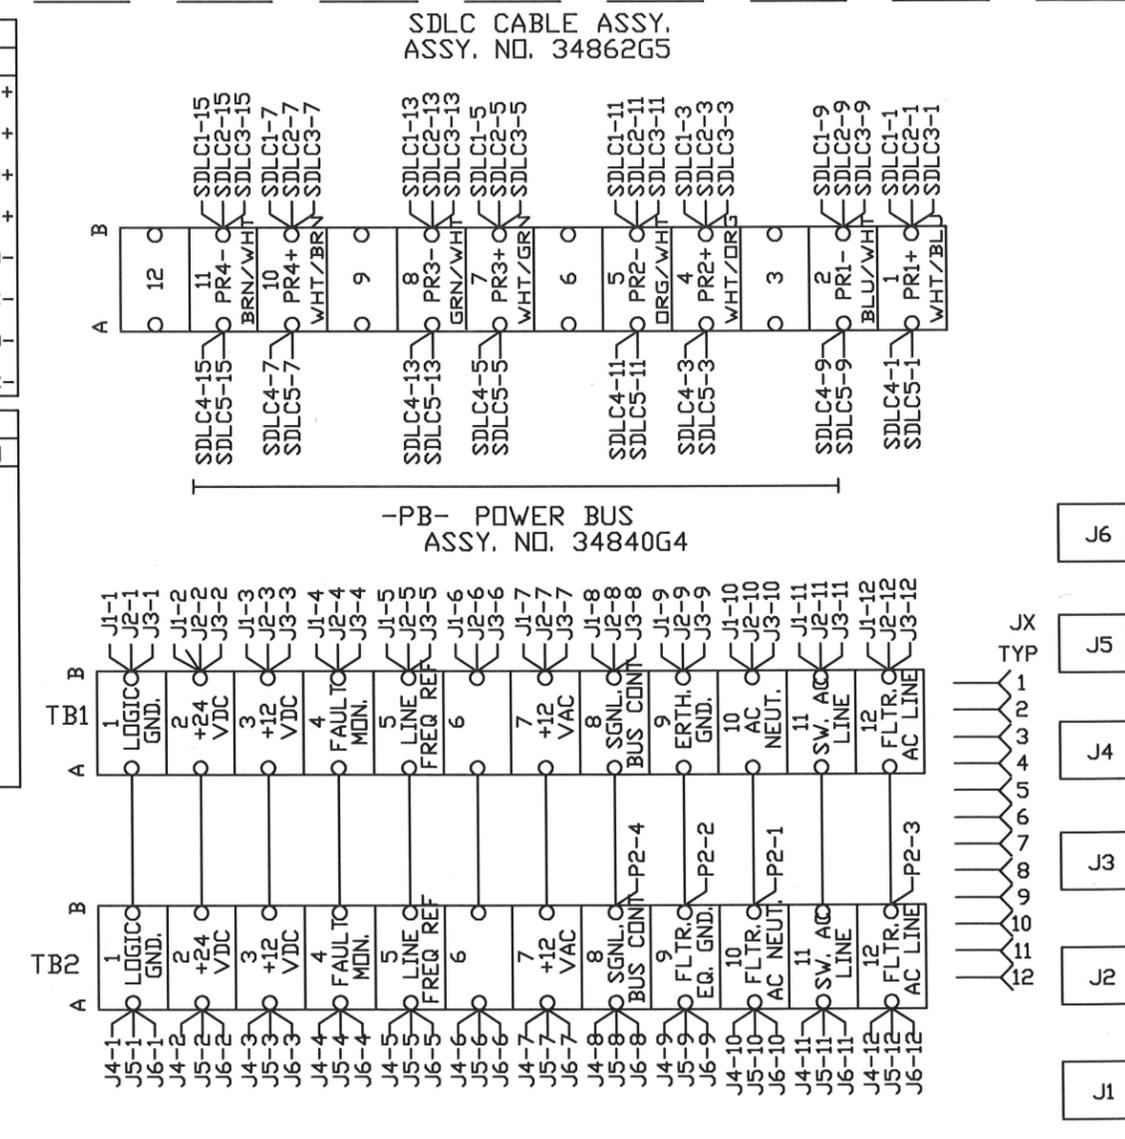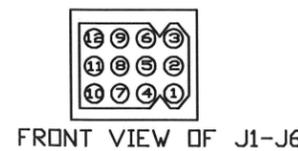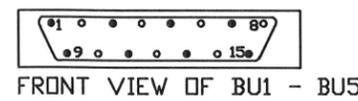


# BIU AND CONNECTING CABLES

## WIRE LIST FOR NEMA MALFUNCTION MANAGEMENT UNIT

| CONNECTOR "A" (MMA) |      |                  |                   | CONNECTOR "B" (MMB)  |      |                  |                    |
|---------------------|------|------------------|-------------------|--|------|------------------|--------------------|
| PIN                 | WIRE | MON. FUNCTION    | SIG. FUNCTION     | PIN  | WIRE | MON. FUNCTION    | SIG. FUNCTION      |
| A                   | A-1  | AC+ I INPUT      | B21               | A  | B-1  | AC+ II INPUT     | J3-2 MMU POWER     |
| B                   | A-2  | OUT RLY 1 OPEN   | B22               | B  | B-2  | S. DLY RLY COMM. | J3-6 MMU POWER     |
| C                   | A-3  | OUT RLY 2 CLSD   | B23               | C  | B-3  | S. DLY RLY OPEN  | B28                |
| D                   | A-4  | CH. 12 GREEN     | 12G-A ^8 WLK      | D  | B-4  | CH. 12 RED       | B40                |
| E                   | A-5  | CH. 11 GREEN     | 11G-A ^6 WLK      | E  | B-5  | CH. 11 RED       | B39                |
| F                   | A-6  | CH. 10 GREEN     | 10G-A ^4 WLK      | F  | B-6  | CH. 9 RED        | B37                |
| G                   | A-7  | CH. 9 GREEN      | 9G-A ^2 WLK       | G  | B-7  | CH. 8 RED        | 8R-A ^8 RED        |
| H                   | A-8  | CH. 8 GREEN      | 8G-A ^8 GRN       | H  | B-8  | CH. 7 RED        | 7R-A ^7 RED        |
| J                   | A-9  | CH. 7 GREEN      | 7G-A ^7 GRN       | J  | B-9  | CH. 6 RED        | 6R-A ^6 RED        |
| K                   | A-10 | CH. 6 GREEN      | 6G-A ^6 GRN       | K  | B-10 | CH. 5 RED        | 5R-A ^5 RED        |
| L                   | A-11 | CH. 5 GREEN      | 5G-A ^5 GRN       | L  | B-11 | CH. 4 RED        | 4R-A ^4 RED        |
| M                   | A-12 | CH. 4 GREEN      | 4G-A ^4 GRN       | M  | B-12 | CH. 2 RED        | 2R-A ^2 RED        |
| N                   | A-13 | CH. 3 GREEN      | 3G-A ^3 GRN       | N  | B-13 | CH. 1 RED        | 1R-A ^1 RED        |
| P                   | A-14 | CH. 2 GREEN      | 2G-A ^2 GRN       | P  | B-14 | (SPARE 1)        | B29                |
| R                   | A-15 | CH. 1 GREEN      | 1G-A ^1 GRN       | R  | B-15 | +24V MONITOR II  | B-3 +24V MON. II   |
| S                   | A-16 | +24V MON. I      | B-4 LS +24V MON.  | S  | B-16 | (SPARE 2)        | B30                |
| T                   | A-17 | LOGIC GND        | B-14 LOGIC GND    | T  | B-17 | CH. 13 RED       | 13R-A OLA RED      |
| U                   | A-18 | CHASSIS GND      | LS7-2 EARTH GND.  | U  | B-18 | S. DLY RLY CLSD  | J3-35 CONT. POWER  |
| V                   | A-19 | AC- (COMMON)     | K1-2 AC NEUTRAL   | V  | B-19 | CH. 10 RED       | B38                |
| W                   | A-20 | OUT RLY 1 COM.   | J3-7 SIG BUS CONT | W  | B-20 | CH. 14 RED       | 14R-A OLB RED      |
| X                   | A-21 | OUT RLY 2 COM.   | A-27 LOGIC GND    | X  | B-21 | CH. 15 RED       | 15R-A OLC RED      |
| Y                   | A-22 | CH. 12 YELLOW    | -T-               | Y  | B-22 | CH. 16 RED       | 16R-A OLD RED      |
| Z                   | A-23 | CH. 11 YELLOW    | -T-               | Z  | B-23 | CH. 3 RED        | 3R-A ^3 RED        |
| a                   | A-24 | CH. 10 WALK      | ----              | a  | B-24 | RED ENABLE       | LS8-1 SIG BUS CON. |
| b                   | A-25 | CH. 10 YELLOW    | -T-               | b  | B-25 | (SPARE 3)        | B31                |
| c                   | A-26 | CH. 9 YELLOW     | -T-               | c  | B-26 | LOCAL FLASH IN   | CAPPED POL/AX FLSH |
| d                   | A-27 | CH. 8 YELLOW     | 8Y-A ^8 YEL       |  | B-27 | SHELL GROUND     | LS6-2 EARTH GND.   |
| e                   | A-28 | CH. 7 YELLOW     | 7Y-A ^7 YEL       | <b>NOTES FOR 16 CHANNEL M.M.U.</b><br>(1) RELAY CONTACT POSITIONS SPECIFIED ARE FOR NON-CONFLICT MODE.<br>(2) TO PROGRAM MMU, SOLDER JUMPERS IN PROGRAMMING CARD FOR ALL PERMISSABLE PHASE MOVEMENTS, MINIMUM CHANGE DISABLE FOR ALL PEDESTRIAN CHANNELS, AND MIN. FLASH, VOLTAGE MON., AND 24V. MON. LATCH OPTIONS AS DESIRED.<br><br><b>M.M.U. CHANNEL ASSIGNMENTS</b><br>CH. 1 = L/S 1 = ^1 VEH.<br>CH. 2 = L/S 2 = ^2 VEH.<br>CH. 3 = L/S 3 = ^3 VEH.<br>CH. 4 = L/S 4 = ^4 VEH.<br>CH. 5 = L/S 5 = ^5 VEH.<br>CH. 6 = L/S 6 = ^6 VEH.<br>CH. 7 = L/S 7 = ^7 VEH.<br>CH. 8 = L/S 8 = ^8 VEH.<br>CH. 9 = L/S 9 = ^2 PED.<br>CH. 10 = L/S 10 = ^4 PED.<br>CH. 11 = L/S 11 = ^6 PED.<br>CH. 12 = L/S 12 = ^8 PED.<br>CH. 13 = L/S 13 = OLAP A<br>CH. 14 = L/S 14 = OLAP B<br>CH. 15 = L/S 15 = OLAP C<br>CH. 16 = L/S 16 = OLAP D |      |                  |                    |
| f                   | A-29 | CH. 6 YELLOW     | 6Y-A ^6 YEL       |  |      |                  |                    |
| g                   | A-30 | CH. 5 YELLOW     | 5Y-A ^5 YEL       |  |      |                  |                    |
| h                   | A-31 | CH. 3 YELLOW     | 3Y-A ^3 YEL       |  |      |                  |                    |
| i                   | A-32 | CH. 15 GREEN     | 15G-A OLC GRN     |  |      |                  |                    |
| j                   | A-33 | CH. 2 YELLOW     | 2Y-A ^2 YEL       |  |      |                  |                    |
| k                   | A-34 | CH. 1 YELLOW     | 1Y-A ^1 YEL       |  |      |                  |                    |
| m                   | A-35 | CONT. VOLT. MON. | B-5 VOLT. MON.    |  |      |                  |                    |
| n                   | A-36 | +24V MON. INH.   | B-2               |  |      |                  |                    |
| p                   | A-37 | OUT RLY 1 CLSD   | J3-3              |  |      |                  |                    |
| q                   | A-38 | OUT RLY 2 OPEN   | A-31 STOP TIME    |  |      |                  |                    |
| r                   | A-39 | CH. 12 WALK      | ----              |  |      |                  |                    |
| s                   | A-40 | CH. 11 WALK      | ----              |  |      |                  |                    |
| t                   | A-41 | CH. 9 WALK       | ----              |  |      |                  |                    |
| u                   | A-42 | CH. 16 YELLOW    | 16Y-A OLD YEL     |  |      |                  |                    |
| v                   | A-43 | CH. 15 YELLOW    | 15Y-A OLC YEL     |  |      |                  |                    |
| w                   | A-44 | CH. 13 YELLOW    | 13Y-A OLA YEL     |  |      |                  |                    |
| x                   | A-45 | CH. 4 YELLOW     | 4Y-A ^4 YEL       |  |      |                  |                    |
| y                   | A-46 | CH. 14 GREEN     | 14G-A OLB GRN     |  |      |                  |                    |
| z                   | A-47 | CH. 13 GREEN     | 13G-A OLA GRN     |  |      |                  |                    |
| AA                  | A-48 | (SPARE 1)        | B24               |  |      |                  |                    |
| BB                  | A-49 | RESET            | B-1               |  |      |                  |                    |
| CC                  | A-50 | CAB. INTLK A     | B25               |  |      |                  |                    |
| DD                  | A-51 | CAB. INTLK B     | B26               |  |      |                  |                    |
| EE                  | A-52 | CH. 14 YELLOW    | 14Y-A OLB YRL     |  |      |                  |                    |
| FF                  | A-53 | CH. 16 GREEN     | 16G-A OLD GRN     |  |      |                  |                    |
| GG                  | A-54 | (SPARE 2)        | B27               |  |      |                  |                    |
| HH                  | A-55 | TYPE SELECT      | A-20 MMU/CMU SEL. |  |      |                  |                    |
|                     | A-56 | SHELL GND        | LS15-2 EARTH GND. |  |      |                  |                    |

## MMU PROGRAM CARD

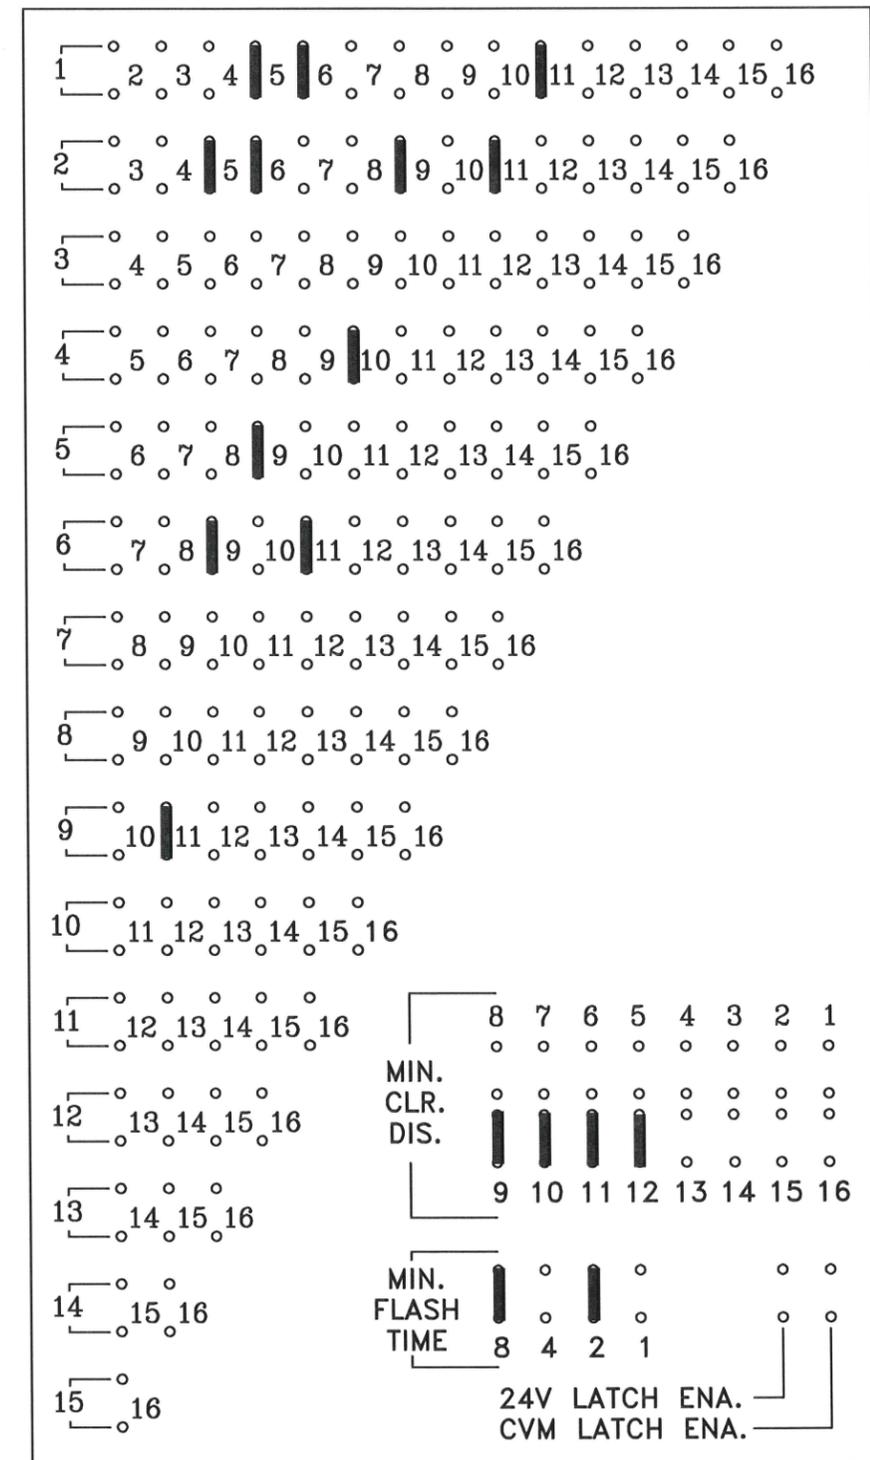

## M.M.U. C/C'S AND PROGRAM CARD

# DETECTOR RACK 34030G1

|                        |                                     |                                     |                                     |                                     |                                     |                                     |                                   |                                   |  |  |           |
|------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-----------------------------------|-----------------------------------|--|--|-----------|
| POWER SUPPLY OR B.I.U. | L3                                  | L1                                  | L7                                  | L5                                  | L11                                 | L9                                  | L15                               | L13                               | PMT 5<br>3                                       | PMT 3<br>1-6   | PGM. CARD |
|                        | 5-1                                 | 1-1                                 | 6-1                                 | 2-1                                 | 3-3                                 | 3-1                                 | ∅                                 | 3-5                               | <input type="checkbox"/> 2CH<br>OPTICOM/<br>OPIC | <input type="checkbox"/> 4CH<br><input type="checkbox"/> 2CH<br>OPTICOM/<br>OPIC |           |
|                        | <input type="checkbox"/> 2CH<br>5-2 | <input type="checkbox"/> 2CH<br>1-2 | <input type="checkbox"/> 2CH<br>6-2 | <input type="checkbox"/> 2CH<br>2-2 | <input type="checkbox"/> 2CH<br>3-4 | <input type="checkbox"/> 2CH<br>3-2 | <input type="checkbox"/> 2CH<br>∅ | <input type="checkbox"/> 2CH<br>∅ | CH. C<br>CH. D<br>4                              | CH. A<br>CH. B<br>2-5  |           |
|                        | L4                                  | L2                                  | L8                                  | L6                                  | L12                                 | L10                                 | L16                               | L14                               | PMT 6  | PMT 4  |           |


  

|                                 |                                    |                               |                                    |                                |                                |                                  |
|---------------------------------|------------------------------------|-------------------------------|------------------------------------|--------------------------------|--------------------------------|----------------------------------|
| J13<br>C/C 33284G10<br>DC POWER | J16<br>C/C 33284G8<br>EXP. OUTPUTS | J14<br>C/C 33284G2<br>LPS 1-8 | J18<br>C/C 33284G9<br>SYS. OUTPUTS | J15<br>C/C 33284G3<br>LPS 9-16 | J17<br>C/C 33284G6<br>AC POWER | J19<br>C/C 33284G17<br>PGM. CARD |
|---------------------------------|------------------------------------|-------------------------------|------------------------------------|--------------------------------|--------------------------------|----------------------------------|

①

| ADDRESS TABLE |  |          |        |  |          |
|---------------|--|----------|--------|--|----------|
| RACK #        | JMPR   | DET. #'S | RACK # | JMPR   | DET. #'S |
| 1             | <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> | 1-16     | 5      | <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> | 65-80    |
| 2             | <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> | 17-32    | 6      | <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> | 81-96    |
| 3             | <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> | 33-48    | 7      | <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> | 97-112   |
| 4             | <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> | 49-64    | 8      | <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> | 113-128  |

| DETECTOR ASSIGNMENTS |             |               |
|----------------------|-------------|---------------|
| CONT. INPUT          | PHASE ASGN. | DETECTOR TYPE |
| 1                    | 1-1         | 1             |
| 2                    | 1-2         | 1             |
| 3                    | 5-1         | 1             |
| 4                    | 5-2         | 1             |
| 5                    | 2-1         | 1             |
| 6                    | 2-2         | 1             |
| 7                    | 6-1         | 1             |
| 8                    | 6-2         | 1             |
| 9                    | 3-1         | 1             |
| 10                   | 3-2         | 1             |
| 11                   | 3-3         | 1             |
| 12                   | 3-4         | 1             |
| 13                   | 3-5         | 1             |
| 14                   |             |               |
| 15                   |             |               |
| 16                   |             |               |
| 17                   | 4-1         | 1             |
| 18                   | 4-2         | 1             |
| 19                   | 4-3         | 1             |
| 20                   | 4-4         | 1             |
| 21                   | 4-5         | 1             |
| 22                   |             |               |
| 23                   |             |               |
| 24                   |             |               |
| 25                   | D1          | 1             |
| 26                   | D2          | 1             |
| 26                   | D3          | 1             |
| 28                   | D4          | 1             |
| 29                   |             |               |
| 30                   |             |               |
| 31                   |             |               |
| 32                   |             |               |
| 33                   |             |               |
| 34                   |             |               |
| 35                   |             |               |
| 36                   |             |               |


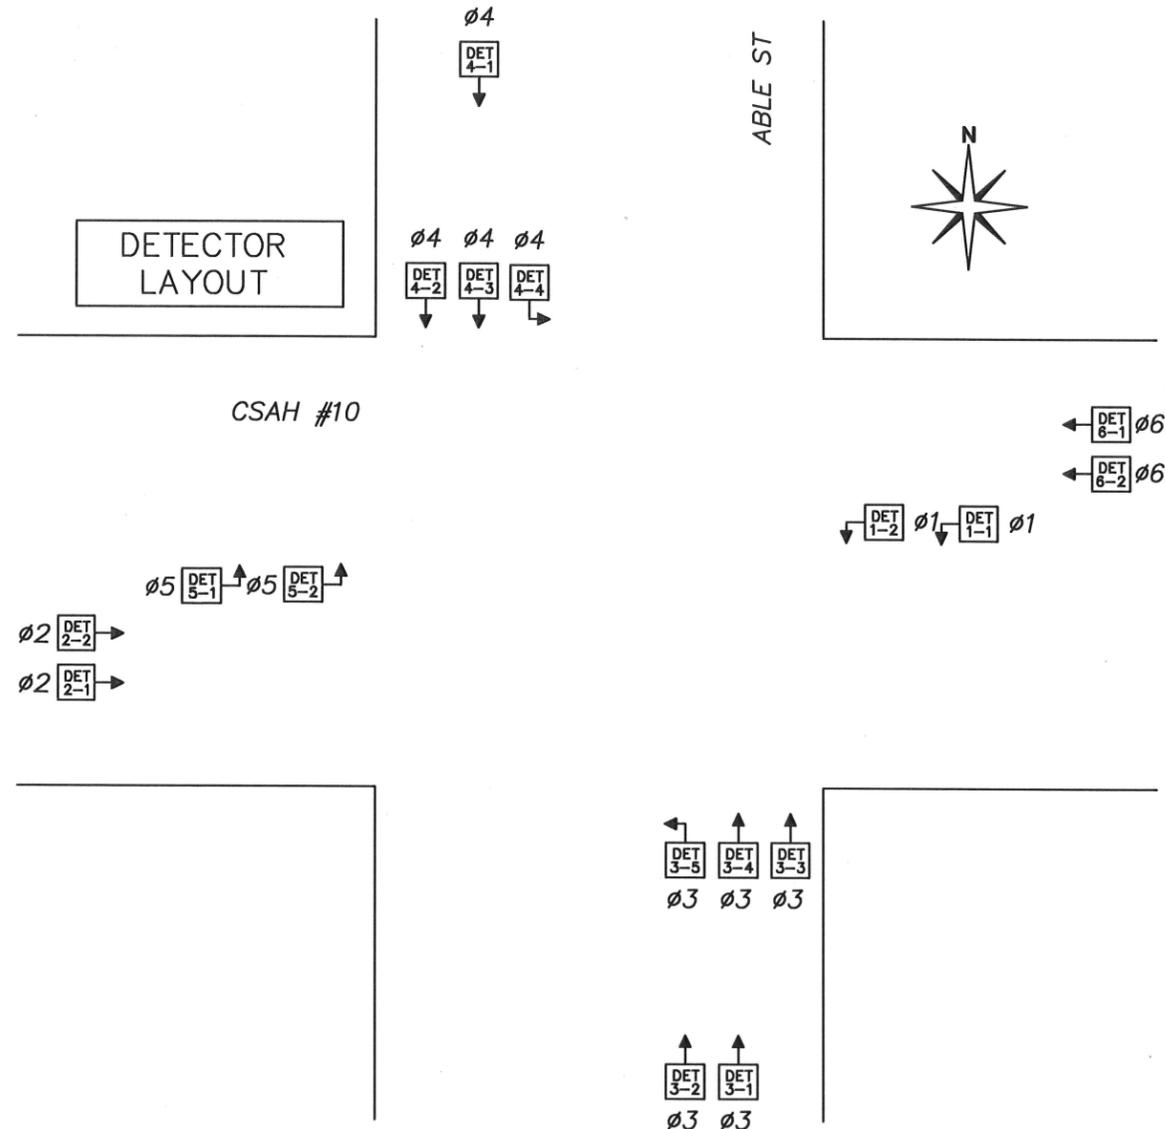


| DET. TYPE |                  | DETECTOR RACK PROGRAMMING JUMPERS |     |                          |                          |                          |                          |                          |                          |                          |                          |                          |                          |                          |                          |                          |                          |                          |                          |                          |                          |                          |                          |                          |                          |                          |                          |                          |                          |
|-----------|------------------|-----------------------------------|-----|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
|           |                  | SLOT 1/2 ①                        |     |                          |                          |                          |                          |                          | SLOT 3/4 ①               |                          |                          |                          |                          |                          |                          | SLOT 5/6 ①               |                          |                          |                          |                          |                          |                          | SLOT 7/8 ①               |                          |                          |                          |                          |                          |                          |
| JP1       | JP2              | JP3                               | JP4 | JP5                      | JP6                      | JP7                      | JP8                      | JP9                      | JP10                     | JP11                     | JP12                     | JP13                     | JP14                     | JP15                     | JP16                     | JP17                     | JP18                     | JP19                     | JP20                     | JP21                     | JP22                     | JP23                     | JP24                     | JP25                     | JP26                     | JP27                     | JP28                     | JP29                     | JP30                     |
| ①         | TS-1             | NO                                | NO  | <input type="checkbox"/> |
| ②         | TS-2             | YES                               | YES | <input type="checkbox"/> |
| ③         | M-632T<br>262-FC | NO                                | NO  | <input type="checkbox"/> |
| ④         | MAG.             | NO                                | NO  | <input type="checkbox"/> |

DETECTOR LOOP  
INTERFACE  
ASSY. 34040G1

J1  
TO DR1: J14  
C/C 33284G2

J2  
TO DR1: J15  
C/C 33284G3

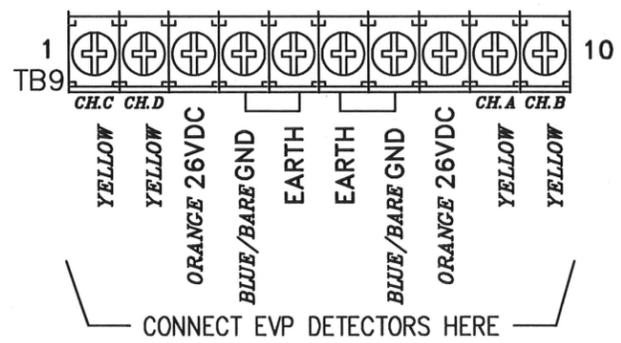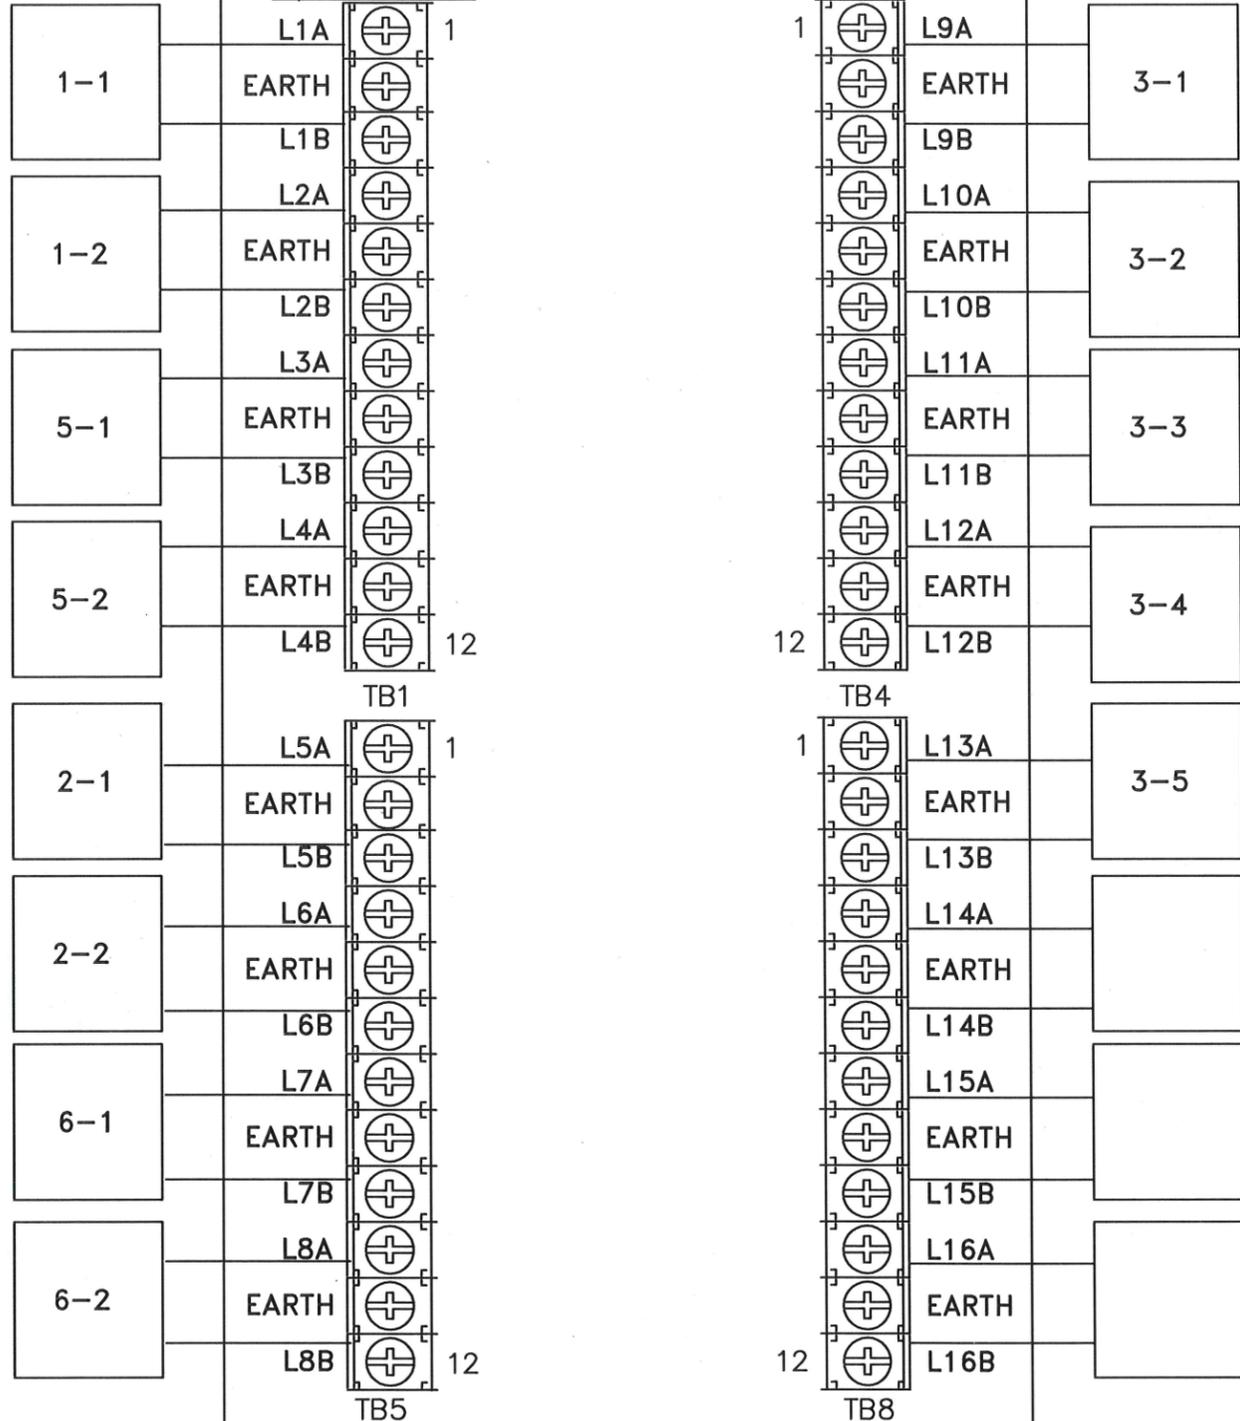

DET. LOOPS 9-16 (J15) C/C 33284G3

| PIN | SIGNAL   | TO           |
|-----|----------|--------------|
| 1   | LOOP 9+  | LPI2: TB4-1  |
| 2   | LOOP 9-  | LPI2: TB4-3  |
| 3   | LOOP 10+ | LPI2: TB4-4  |
| 4   | LOOP 10- | LPI2: TB4-6  |
| 5   | LOOP 11+ | LPI2: TB4-7  |
| 6   | LOOP 11- | LPI2: TB4-9  |
| 7   | LOOP 12+ | LPI2: TB4-10 |
| 8   | LOOP 12- | LPI2: TB4-12 |
| 9   | LOOP 13+ | LPI2: TB8-1  |
| 10  | LOOP 13- | LPI2: TB8-3  |
| 11  | LOOP 14+ | LPI2: TB8-4  |
| 12  | LOOP 14- | LPI2: TB8-6  |
| 13  | LOOP 15+ | LPI2: TB8-7  |
| 14  | LOOP 15- | LPI2: TB8-9  |
| 15  | LOOP 16+ | LPI2: TB8-10 |
| 16  | LOOP 16- | LPI2: TB8-12 |
| 17  | ----     |              |
| 18  | ----     |              |
| 19  | ----     |              |
| 20  | ----     |              |

DET. LOOPS 1-8 (J14) C/C 33284G2

| PIN | SIGNAL              | TO            |
|-----|---------------------|---------------|
| 1   | LOOP 1+             | LPI1: TB1-1   |
| 2   | LOOP 1-             | LPI1: TB1-3   |
| 3   | LOOP 2+             | LPI1: TB1-4   |
| 4   | LOOP 2-             | LPI1: TB1-6   |
| 5   | LOOP 3+             | LPI1: TB1-7   |
| 6   | LOOP 3-             | LPI1: TB1-9   |
| 7   | LOOP 4+             | LPI1: TB1-10  |
| 8   | LOOP 4-             | LPI1: TB1-12  |
| 9   | LOOP 5+             | LPI1: TB5-1   |
| 10  | LOOP 5-             | LPI1: TB5-3   |
| 11  | LOOP 6+             | LPI1: TB5-4   |
| 12  | LOOP 6-             | LPI1: TB5-6   |
| 13  | LOOP 7+             | LPI1: TB5-7   |
| 14  | LOOP 7-             | LPI1: TB5-9   |
| 15  | LOOP 8+             | LPI1: TB5-10  |
| 16  | LOOP 8-             | LPI1: TB5-12  |
| 17  | PMT. DET. CH. C     | LPI1: TB9-1   |
| 18  | PMT. DET. CH. D     | LPI1: TB9-2   |
| 19  | KEY PIN             |               |
| 20  | PMT. CH. C/D +26VDC | LPI1: TB9-3   |
| 21  | PMT. DC GROUND      | LPI1: TB9-4,7 |
| 22  | PMT. CH. A/B +26VDC | LPI1: TB9-8   |
| 23  | PMT. DET. CH. A     | LPI1: TB9-9   |
| 24  | PMT. DET. CH. B     | LPI1: TB9-10  |
| 25  | ----                |               |
| 26  | ----                |               |

| DET. RACK POWER<br>C/C 34842G5 |                |                      |       |
|--------------------------------|----------------|----------------------|-------|
| P1/<br>DR: J13                 | P2/<br>DR: J17 | FUNCTION             | TO    |
| 1                              |                | +12 VDC (DET. POWER) | PB-3  |
| 2                              |                | +24 VDC (BIU POWER)  | PB-2  |
| 3                              |                | LOGIC GROUND         | PB-1  |
| 4                              |                | EARTH GROUND         | PB-9  |
| 5                              |                | "KEY PIN"            |       |
| 6                              |                | LINE FREQUENCY REF.  | PB-5  |
|                                | 1              | EARTH GROUND         | ----  |
|                                | 2              | AC LINE              | PB-12 |
|                                | 3              | AC NEUTRAL           | PB-10 |
|                                | 4              | LOGIC GROUND         | ----  |

| EXPANSION OUTPUTS<br>C/C 33284G8 |                      |         |
|----------------------------------|----------------------|---------|
| J16                              | FUNCTION             | TO      |
| 17                               | DET. 17 / PMT. A OUT | MP: B19 |
| 18                               | DET. 18 / PMT. B OUT | MP: B20 |
| 19                               | PMT. C OUT           | MP: B17 |
| 20                               | PMT. D OUT           | MP: B18 |

DETECTOR LOOP INTERFACE

# DETECTOR RACK 34030G1

|                        |              |              |            |            |             |             |            |            |           |
|------------------------|--------------|--------------|------------|------------|-------------|-------------|------------|------------|-----------|
| POWER SUPPLY OR B.I.U. | L19          | L17          | L23        | L21        | L27         | L25         | L31        | L29        | PGM. CARD |
|                        | 4-3          | 4-1          | ∅          | 4-5        | D3          | D1          | ∅          | ∅          |           |
|                        | □ 2CH<br>4-4 | □ 2CH<br>4-2 | □ 2CH<br>∅ | □ 2CH<br>∅ | □ 2CH<br>D4 | □ 2CH<br>D2 | □ 2CH<br>∅ | □ 2CH<br>∅ |           |
|                        | L20          | L18          | L24        | L22        | L28         | L26         | L32        | L30        |           |


  

|  |   |                                      |   |                                       |                                       |   |
|--|---|--------------------------------------|---|---------------------------------------|---------------------------------------|---|
| <b>J13</b><br>C/C 33284G10<br>DC POWER | <b>J16</b><br>C/C 33284G8<br>EXP. OUTPUTS | <b>J14</b><br>C/C 33284G2<br>LPS 1-8 | <b>J18</b><br>C/C 33284G9<br>SYS. OUTPUTS | <b>J15</b><br>C/C 33284G3<br>LPS 9-16 | <b>J17</b><br>C/C 33284G6<br>AC POWER | <b>J19</b><br>C/C 33284G17<br>PGM. CARD |
|--|---|--------------------------------------|---|---------------------------------------|---------------------------------------|---|

②

| ADDRESS TABLE |      |          |        |      |          |
|---------------|------|----------|--------|------|----------|
| RACK #        | JMPR | DET. #'S | RACK # | JMPR | DET. #'S |
| 1             | ⊗⊗⊗  | 1-16     | 5      | ⊗⊗⊗  | 65-80    |
| 2             | ⊗⊗⊗  | 17-32    | 6      | ⊗⊗⊗  | 81-96    |
| 3             | ⊗⊗⊗  | 33-48    | 7      | ⊗⊗⊗  | 97-112   |
| 4             | ⊗⊗⊗  | 49-64    | 8      | ⊗⊗⊗  | 113-128  |

| DETECTOR ASSIGNMENTS |             |               |
|----------------------|-------------|---------------|
| CONT. INPUT          | PHASE ASGN. | DETECTOR TYPE |
| 1                    | 1-1         | 1             |
| 2                    | 1-2         | 1             |
| 3                    | 5-1         | 1             |
| 4                    | 5-2         | 1             |
| 5                    | 2-1         | 1             |
| 6                    | 2-2         | 1             |
| 7                    | 6-1         | 1             |
| 8                    | 6-2         | 1             |
| 9                    | 3-1         | 1             |
| 10                   | 3-2         | 1             |
| 11                   | 3-3         | 1             |
| 12                   | 3-4         | 1             |
| 13                   | 3-5         | 1             |
| 14                   |             |               |
| 15                   |             |               |
| 16                   |             |               |
| 17                   | 4-1         | 1             |
| 18                   | 4-2         | 1             |
| 19                   | 4-3         | 1             |
| 20                   | 4-4         | 1             |
| 21                   | 4-5         | 1             |
| 22                   |             |               |
| 23                   |             |               |
| 24                   |             |               |
| 25                   | D1          | 1             |
| 26                   | D2          | 1             |
| 26                   | D3          | 1             |
| 28                   | D4          | 1             |
| 29                   |             |               |
| 30                   |             |               |
| 31                   |             |               |
| 32                   |             |               |
| 33                   |             |               |
| 34                   |             |               |
| 35                   |             |               |
| 36                   |             |               |

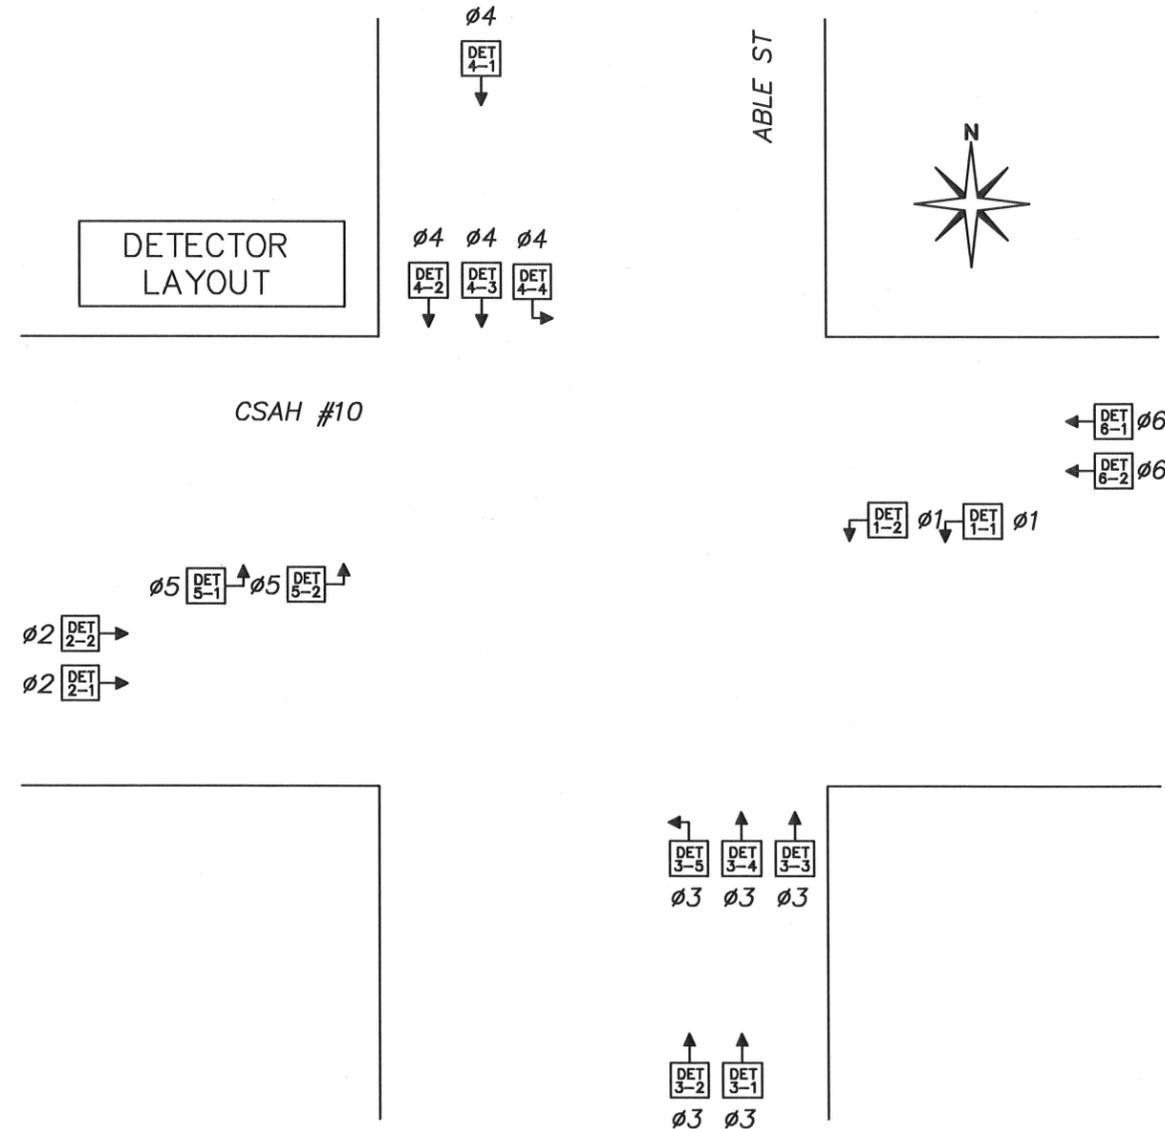


| DETECTOR RACK PROGRAMMING JUMPERS |     |     |            |     |     |     |     |            |     |      |      |      |            |      |      |      |      |            |      |      |      |      |      |      |      |      |      |      |
|-----------------------------------|-----|-----|------------|-----|-----|-----|-----|------------|-----|------|------|------|------------|------|------|------|------|------------|------|------|------|------|------|------|------|------|------|------|
| DET. TYPE                         | JP1 | JP2 | SLOT 1/2 ① |     |     |     |     | SLOT 3/4 ① |     |      |      |      | SLOT 5/6 ① |      |      |      |      | SLOT 7/8 ① |      |      |      |      |      |      |      |      |      |      |
|                                   |     |     | JP3        | JP4 | JP5 | JP6 | JP7 | JP8        | JP9 | JP10 | JP11 | JP12 | JP13       | JP14 | JP15 | JP16 | JP17 | JP18       | JP19 | JP20 | JP21 | JP22 | JP23 | JP24 | JP25 | JP26 | JP27 | JP28 |
| ① TS-1                            | NO  | NO  | ⊗          | ⊗   | ⊗   | ⊗   | ⊗   | ⊗          | ⊗   | ⊗    | ⊗    | ⊗    | ⊗          | ⊗    | ⊗    | ⊗    | ⊗    | ⊗          | ⊗    | ⊗    | ⊗    | ⊗    | ⊗    | ⊗    | ⊗    | ⊗    | ⊗    | ⊗    |
| ② TS-2                            | YES | YES | ⊗          | ⊗   | ⊗   | ⊗   | ⊗   | ⊗          | ⊗   | ⊗    | ⊗    | ⊗    | ⊗          | ⊗    | ⊗    | ⊗    | ⊗    | ⊗          | ⊗    | ⊗    | ⊗    | ⊗    | ⊗    | ⊗    | ⊗    | ⊗    | ⊗    | ⊗    |
| ③ M-632T<br>262-FC                | NO  | NO  | ⊗          | ⊗   | ⊗   | ⊗   | ⊗   | ⊗          | ⊗   | ⊗    | ⊗    | ⊗    | ⊗          | ⊗    | ⊗    | ⊗    | ⊗    | ⊗          | ⊗    | ⊗    | ⊗    | ⊗    | ⊗    | ⊗    | ⊗    | ⊗    | ⊗    | ⊗    |
| ④ MAG.                            | NO  | NO  | ⊗          | ⊗   | ⊗   | ⊗   | ⊗   | ⊗          | ⊗   | ⊗    | ⊗    | ⊗    | ⊗          | ⊗    | ⊗    | ⊗    | ⊗    | ⊗          | ⊗    | ⊗    | ⊗    | ⊗    | ⊗    | ⊗    | ⊗    | ⊗    | ⊗    | ⊗    |

DETECTOR LOOP  
INTERFACE  
ASSY. 34040G1

J1  
TO DR1: J14  
C/C 33284G2

J2  
TO DR1: J15  
C/C 33284G3

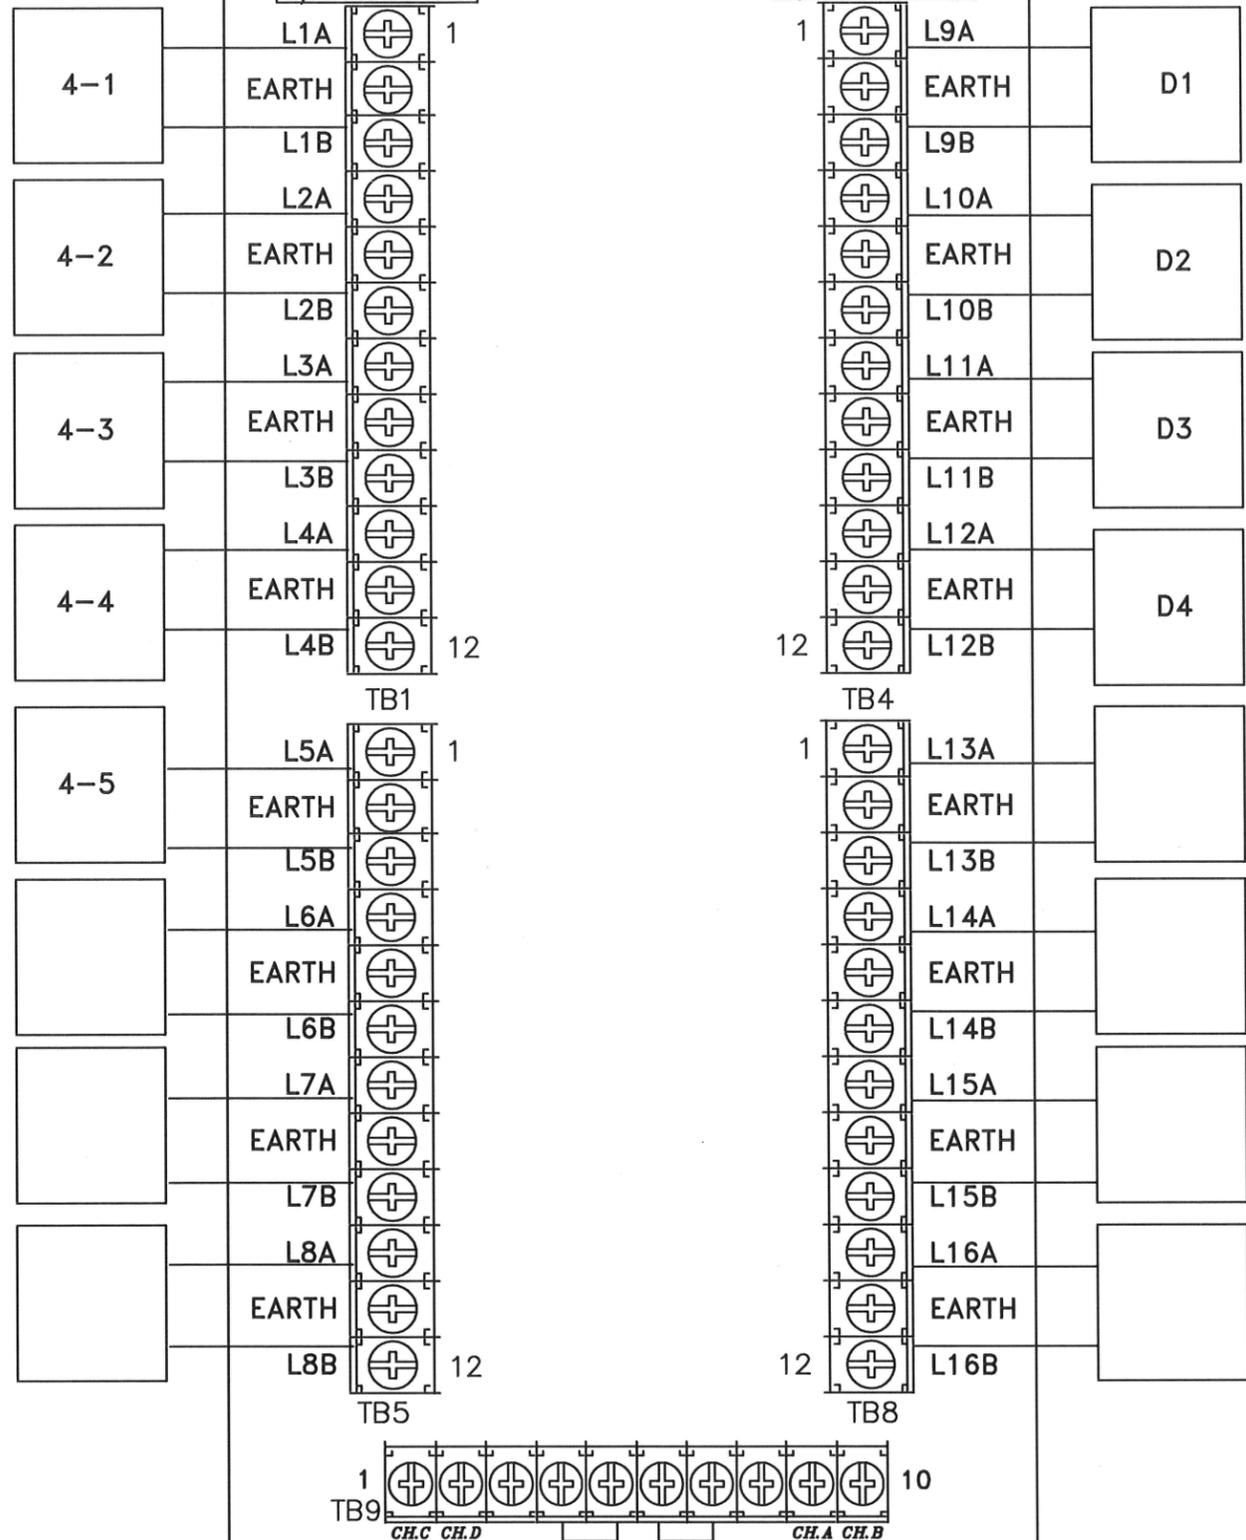

DET. LOOPS 9-16 (J15) C/C 33284G3

| PIN | SIGNAL   | TO           |
|-----|----------|--------------|
| 1   | LOOP 9+  | LPI2: TB4-1  |
| 2   | LOOP 9-  | LPI2: TB4-3  |
| 3   | LOOP 10+ | LPI2: TB4-4  |
| 4   | LOOP 10- | LPI2: TB4-6  |
| 5   | LOOP 11+ | LPI2: TB4-7  |
| 6   | LOOP 11- | LPI2: TB4-9  |
| 7   | LOOP 12+ | LPI2: TB4-10 |
| 8   | LOOP 12- | LPI2: TB4-12 |
| 9   | LOOP 13+ | LPI2: TB8-1  |
| 10  | LOOP 13- | LPI2: TB8-3  |
| 11  | LOOP 14+ | LPI2: TB8-4  |
| 12  | LOOP 14- | LPI2: TB8-6  |
| 13  | LOOP 15+ | LPI2: TB8-7  |
| 14  | LOOP 15- | LPI2: TB8-9  |
| 15  | LOOP 16+ | LPI2: TB8-10 |
| 16  | LOOP 16- | LPI2: TB8-12 |
| 17  | ----     |              |
| 18  | ----     |              |
| 19  | ----     |              |
| 20  | ----     |              |

| DET. RACK POWER<br>C/C 34842G5 |                |                      |       |
|--------------------------------|----------------|----------------------|-------|
| P1/<br>DR: J13                 | P2/<br>DR: J17 | FUNCTION             | TO    |
| 1                              |                | +12 VDC (DET. POWER) | PB-3  |
| 2                              |                | +24 VDC (BIU POWER)  | PB-2  |
| 3                              |                | LOGIC GROUND         | PB-1  |
| 4                              |                | EARTH GROUND         | PB-9  |
| 5                              |                | "KEY PIN"            |       |
| 6                              |                | LINE FREQUENCY REF.  | PB-5  |
|                                | 1              | EARTH GROUND         | ----  |
|                                | 2              | AC LINE              | PB-12 |
|                                | 3              | AC NEUTRAL           | PB-10 |
|                                | 4              | LOGIC GROUND         | ----  |

DET. LOOPS 1-8 (J14) C/C 33284G2

| PIN | SIGNAL              | TO            |
|-----|---------------------|---------------|
| 1   | LOOP 1+             | LPI1: TB1-1   |
| 2   | LOOP 1-             | LPI1: TB1-3   |
| 3   | LOOP 2+             | LPI1: TB1-4   |
| 4   | LOOP 2-             | LPI1: TB1-6   |
| 5   | LOOP 3+             | LPI1: TB1-7   |
| 6   | LOOP 3-             | LPI1: TB1-9   |
| 7   | LOOP 4+             | LPI1: TB1-10  |
| 8   | LOOP 4-             | LPI1: TB1-12  |
| 9   | LOOP 5+             | LPI1: TB5-1   |
| 10  | LOOP 5-             | LPI1: TB5-3   |
| 11  | LOOP 6+             | LPI1: TB5-4   |
| 12  | LOOP 6-             | LPI1: TB5-6   |
| 13  | LOOP 7+             | LPI1: TB5-7   |
| 14  | LOOP 7-             | LPI1: TB5-9   |
| 15  | LOOP 8+             | LPI1: TB5-10  |
| 16  | LOOP 8-             | LPI1: TB5-12  |
| 17  | PMT. DET. CH. C     | LPI1: TB9-1   |
| 18  | PMT. DET. CH. D     | LPI1: TB9-2   |
| 19  | KEY PIN             |               |
| 20  | PMT. CH. C/D +26VDC | LPI1: TB9-3   |
| 21  | PMT. DC GROUND      | LPI1: TB9-4,7 |
| 22  | PMT. CH. A/B +26VDC | LPI1: TB9-8   |
| 23  | PMT. DET. CH. A     | LPI1: TB9-9   |
| 24  | PMT. DET. CH. B     | LPI1: TB9-10  |
| 25  | ----                |               |
| 26  | ----                |               |

| EXPANSION OUTPUTS<br>C/C 33284G8 |                      |         |
|----------------------------------|----------------------|---------|
| J16                              | FUNCTION             | TO      |
| 17                               | DET. 17 / PMT. A OUT | MP: B19 |
| 18                               | DET. 18 / PMT. B OUT | MP: B20 |
| 19                               | PMT. C OUT           | MP: B17 |
| 20                               | PMT. D OUT           | MP: B18 |

DETECTOR LOOP INTERFACE

**EVP SENSORS**

| CABLE | DISCR. CHAN. | PHASES | POLE# | TERMINAL TB9 |       |     |
|-------|--------------|--------|-------|--------------|-------|-----|
|       |              |        |       | SIGNAL       | DC(+) | GND |
| 25    | 1            | 1-6    | 3     | 9            | 8     | 7   |
| 39    | 2            | 2-5    | 6     | 10           | 8     | 7   |
| 44    | 3            | 3      | 5     | 1            | 3     | 4   |
| 45    | 4            | 4      | 5     | 2            | 3     | 4   |
|       |              |        |       |              |       |     |

**VEHICLE SIGNALS**

| CABLE | SIGNAL  | TERMINAL |    |    |    |    |    |
|-------|---------|----------|----|----|----|----|----|
|       |         | G        | Y  | R  | G  | Y  | R  |
| 13    | 1-1     | 1        | 3  | 5  |    |    |    |
| 7     | 1-2     | 2        | 4  | 6  |    |    |    |
| 35    | 2-1,2-3 |          |    |    | 7  | 9  | 11 |
| 36    | 2-2     |          |    |    | 8  | 10 | 12 |
| 40    | 3-1     |          |    |    | 13 | 15 | 17 |
| 40    | 3-2     | 14       |    |    | 14 | 16 | 18 |
| 50    | 3-3     |          |    |    | 13 | 15 | 17 |
| 20    | 3-4     | 14       | 16 |    |    |    | 18 |
| 13    | 4-1     |          |    |    | 19 | 21 | 23 |
| 41    | 4-2     | 19       |    |    | 20 | 22 | 24 |
| 7     | 4-3     |          |    |    | 19 | 21 | 23 |
| 36    | 4-4     | 20       | 22 |    |    |    | 24 |
| 41    | 5-1     | 25       | 27 | 29 |    |    |    |
| 50    | 5-2     | 26       | 28 | 30 |    |    |    |
| 19    | 6-1,6-3 |          |    |    | 31 | 33 | 35 |
| 20    | 6-2     |          |    |    | 32 | 34 | 36 |

**VEH DETECTORS**

| CABLE | DET | SLOT | FUNC | RACK | TERMINAL |
|-------|-----|------|------|------|----------|
| 46    | 1-1 | 1    | 1    | 1    | L1       |
| 47    | 1-2 | 2    | 1    | 1    | L2       |
| 11    | 2-1 | 5    | 1    | 1    | L5       |
| 12    | 2-2 | 6    | 1    | 1    | L6       |
| 30    | 3-1 | 9    | 3/8  | 1    | L9       |
| 31    | 3-2 | 10   | 3/8  | 1    | L10      |
| 32    | 3-3 | 11   | 7    | 1    | L11      |
| 33    | 3-4 | 12   | 7    | 1    | L12      |
| 34    | 3-5 | 13   | 7    | 1    | L13      |
| 29    | 4-1 | 17   | 3/8  | 2    | L1       |
| 26    | 4-2 | 18   | 7    | 2    | L2       |
| 27    | 4-3 | 19   | 7    | 2    | L3       |
| 28    | 4-4 | 20   | 7    | 2    | L4       |
| 53    | 4-5 | 21   | 7    | 2    | L5       |
| 15    | 5-1 | 3    | 1    | 1    | L3       |
| 16    | 5-2 | 4    | 1    | 1    | L4       |
| 54    | 6-1 | 7    | 1    | 1    | L7       |
| 55    | 6-2 | 8    | 1    | 1    | L8       |
| 48    | D1  | 25   | 11   | 2    | L9       |
| 49    | D2  | 26   | 11   | 2    | L10      |
| 17    | D3  | 27   | 11   | 2    | L11      |
| 18    | D4  | 28   | 11   | 2    | L12      |
|       |     |      |      |      |          |
|       |     |      |      |      |          |

**PED PUSHBUTTONS**

| CABLE | PPB | TERMINAL | RETURN |
|-------|-----|----------|--------|
| 9     | 2-1 | PC2      | GB1    |
| 37    | 2-2 | PC2      | GB1    |
| 22    | 4-1 | PC4      | GB1    |
| 14    | 4-2 | PC4      | GB1    |
| 9     | 4-3 | PC4      | GB1    |
| 52    | 6-1 | PC6      | GB1    |
| 23    | 6-2 | PC6      | GB1    |
|       |     |          |        |
|       |     |          |        |

**PED SIGNALS**

| CABLE | SIGNAL | TERMINAL |    |
|-------|--------|----------|----|
|       |        | WK       | DW |
| 8     | 2-1    | 49       | 53 |
| 35    | 2-2    | 50       | 54 |
| 21    | 4-1    | 55       | 59 |
| 7     | 4-2    | 56       | 60 |
| 51    | 6-1    | 61       | 65 |
| 19    | 6-2    | 62       | 66 |
|       |        |          |    |
|       |        |          |    |

**EVP VERIFY LIGHTS**

| CABLE | CONTR. CHAN. | PHASES | POLE# | TERM. |
|-------|--------------|--------|-------|-------|
|       |              |        |       |       |
| 24    | 3            | 1-6    | 3     | 51    |
| 38    | 4            | 2-5    | 6     | 57    |
| 42    | 5            | 3      | 5     | 63    |
| 43    | 6            | 4      | 5     | 69    |
|       |              |        |       |       |
|       |              |        |       |       |

|              |       |    |   |     |     |     |       |    |   |     |     |     |       |    |   |     |     |     |       |    |   |     |     |     |      |     |        |           |
|--------------|-------|----|---|-----|-----|-----|-------|----|---|-----|-----|-----|-------|----|---|-----|-----|-----|-------|----|---|-----|-----|-----|------|-----|--------|-----------|
| <b>B.I.U</b> | DET   | PH | F | DET | DLY | EXT | DET   | PH | F | DET | DLY | EXT | DET   | PH | F | DET | DLY | EXT | DET   | PH | F | DET | DLY | EXT | EVP  | PH  | POLE # | CONT CH # |
|              | CH 1  | 1  |   | 1-1 |     |     | CH 5  | 2  |   | 2-1 |     |     | CH 9  | 3  |   | 3-1 |     |     | CH 13 | 3  |   | 3-5 |     |     | CH 1 | 1-6 | 3      | 3         |
|              | CH 2  | 1  |   | 1-2 |     |     | CH 6  | 2  |   | 2-2 |     |     | CH 10 | 3  |   | 3-2 |     |     | CH 14 |    |   |     |     |     | CH 2 | 2-5 | 6      | 4         |
|              | CH 3  | 5  |   | 5-1 |     |     | CH 7  | 6  |   | 6-1 |     |     | CH 11 | 3  |   | 3-3 |     |     | CH 15 |    |   |     |     |     | CH 3 | 3   | 5      | 5         |
|              | CH 4  | 5  |   | 5-2 |     |     | CH 8  | 6  |   | 6-2 |     |     | CH 12 | 3  |   | 3-4 |     |     | CH 16 |    |   |     |     |     | CH 4 | 4   | 5      | 6         |
| <b>B.I.U</b> | DET   | PH | F | DET | DLY | EXT | DET   | PH | F | DET | DLY | EXT | DET   | PH | F | DET | DLY | EXT | DET   | PH | F | DET | DLY | EXT |      |     |        |           |
|              | CH 17 | 4  |   | 4-1 |     |     | CH 21 | 4  |   | 4-5 |     |     | CH 25 |    |   | D1  |     |     | CH 29 |    |   |     |     |     |      |     |        |           |
|              | CH 18 | 4  |   | 4-2 |     |     | CH 22 |    |   |     |     |     | CH 26 |    |   | D2  |     |     | CH 30 |    |   |     |     |     |      |     |        |           |
|              | CH 19 | 4  |   | 4-3 |     |     | CH 23 |    |   |     |     |     | CH 27 |    |   | D3  |     |     | CH 31 |    |   |     |     |     |      |     |        |           |
|              | CH 20 | 4  |   | 4-4 |     |     | CH 24 |    |   |     |     |     | CH 28 |    |   | D4  |     |     | CH 32 |    |   |     |     |     |      |     |        |           |