

GOVERNING SPECIFICATIONS

THE 2020 EDITION OF THE MINNESOTA DEPARTMENT OF TRANSPORTATION "STANDARD SPECIFICATIONS FOR CONSTRUCTION" AND THE "SUPPLEMENTAL SPECIFICATIONS" DATED SEPTEMBER 2022 SHALL GOVERN.

ALL TRAFFIC CONTROL DEVICES SHALL CONFORM TO THE LATEST EDITION OF THE MINNESOTA MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES, INCLUDING THE LATEST FIELD MANUAL FOR TEMPORARY TRAFFIC CONTROL ZONE LAYOUTS.

THIS PLAN CONTAINS 11 SHEETS

INDEX

SHEET NO.	DESCRIPTION
1	TITLE SHEET
2	STATEMENT OF ESTIMATED QUANTITIES
3	TYPICAL SECTIONS
4-5	DETAILS
6-7	CONSTRUCTION PLAN
8-11	SIGNING AND STRIPING PLANS

Approved ANOKA COUN	<u>ال – اہ</u> _{,20} کے ITY ENGINEER
	TITLE SHEET
OJECT23-12-70	Sheet <u>1</u> of <u>11</u> Sheets

G
c
_C
Т
۵,
0

Notes	Item Number	ITEM DESCRIPTION	Unit	TOTAL PROJECT QUANTITIES ESTIMATE								
	2021.501	MOBILIZATION	LUMP SUM	1								
1	2104.503	SAWING BITUMINOUS PAVEMENT (FULL DEPTH)	LIN FT	198								
2	2104.504	REMOVE BITUMINOUS DRIVEWAY PAVEMENT	SQ YD	112								
3	2123.510	MOTOR GRADER	HOUR	8								
	2130.523	WATER	M GALLON	73								
	2215.504	FULL DEPTH RECLAMATION	SQ YD	10456								
4	2215.507	HAUL FULL DEPTH RECLAMATION (LV)	CU YD	4								
5	2221.509	SHOULDER BASE AGGREGATE CLASS 5	TON	40								
6	2232.604	MILL BITUMINOUS PAVEMENT (SPECIAL)	SQ YD	410								
	2357.506	BITUMINOUS MATERIAL FOR TACK COAT	GALLON	543								
7	2360.509	TYPE SP 9.5 WEARING COURSE MIXTURE (3;B)	TON	13								
8	2360.509	TYPE SP 12.5 WEARING COURSE MIXTURE (4;C)	TON	94								
	2360.509	TYPE SP 12.5 WEARING COURSE MIXTURE (4;C)	TON	2637								
9	2540.602	MAIL BOX SUPPORT	EACH	7								
	2563.601	TRAFFIC CONTROL SUPERVISOR	LUMP SUM	1								
10	2563.601	TRAFFIC CONTROL	LUMP SUM	1								
11	2563.613	PORTABLE CHANGEABLE MESSAGE SIGN	UNIT DAY	20								
12	2581.503	REMOVABLE PREFORMED PAVEMENT MARKING TAPE	LIN FT	159								
13	2582.503	4" SOLID LINE MULTI-COMPONENT GROUND IN	LIN FT	9670								
13	2582.503	4" BROKEN LINE MULTI-COMPONENT GROUND IN	LIN FT	780								

	CONSTRUCTIO
1	REFERENCE DETAILS (PAGES 4-5) FOR REMOVAL [
2	ITEM FOR BITUMINOUS DRIVEWAYS AND STREET A
2	CONTACTING PROPERTY OWNER 48 HOURS BEFO
3	ITEM USED TO MOVE EXCESS RECLAIM MATERIAL A
5	BETWEEN THE PROPOSED AND EXISTING PAVEME
4	ITEM USED TO HAUL EXCESS RECLAIM FROM TIE-IN
5	ITEM INCLUDES 7 TONS FOR EACH GRAVEL ENTRA
6	TO BE USED FOR MILLING STREET APPROACHES A
7	ITEM FOR BITUMINOUS DRIVEWAYS. DRIVEWAYS SH
8	STREET APPRACHES SHALL BE PAVED AFTER MAIN
	MAILBOXES ARE TO BE INSTALLED AT THE EXISTING
9	AUTHORITY, CONTRACTOR IS RESPONSIBILE FOR
	INCIDENTAL TO INSTALLATION.
	ALL TRAFFIC CONTROL DEVICES SHALL CONFORM
10	CURRENT REVISION OF THE "MINNESOTA MANUAL
10	PASS WITH CARE, NO CENTER STRIPE, AND STOP
	PERMANENT PAVEMENT MARKINGS ARE NOT PRES
11	2 MESSAGE BOARDS, ONE ON THE EACH END OF P
	CONSTRUCTION; REFERENCE STRIPING PLAN FOR
	CENTERLINE AND LANE DESIGNATION SKIPS TO BE
12	NEW LIFT OF PAVEMENT; SKIPS MUST BE INPLACE
	CONTRACTOR IS TO REMOVE PRIOR TO FINAL STR
13	FINAL STRIPING SHALL BE INSTALLED WITHIN 72 HO
15	CANNOT BE INSTALLED SOONER THAN 48 HOURS.

	MNDOT STANDARD PLATES
PLATE NO.	DESCRIPTION
8000K	TEMPORARY CHANNELIZERS (3 SHEETS)
9350B	MAILBOX SUPPORT - SWING-AWAY TYPE

	BASIS OF PLANNED QUANTITIES							
2357	BITUMINOUS MATERIAL FOR TACK COAT	0.05 GAL / SQ YD						
2211	AGGREGATE BASE CLASS 5	1.8 TONS / CU YD						
2360	ALL BITUMINOUS PAVEMENT	115 LBS / SQ YD / IN THICKNESS						
2581	REMOVABLE PREFORM PAVEMENT MARKING TAPE	2' AT 50' INTERVALS						
2575	SEED MIXTURE 25-121	61 LBS / ACRE						
2574	FERTILIZER TYPE 3	350 LBS./ ACRE						
2575	HYDRAULIC REINFORCED FIBER MATRIX	3900 LBS./ ACRE						

BITUMINOUS STREET SUMMARY							
	BITUMINOUS						
LOCATION	2360 TYPE SP 12.5 WEAR (4,C)	NOTES					
	TON						
218th	16	[1]					
221st	43	[1]					
223rd	36	[1]					
PROJECT TOTAL	94						
BITUMINOUS SUMMARY N	OTES:						

BI	TUMINOUS	SUMMARY NOTES:
[1]	QUANTITY	ESTIMATED FOR 2 LIFTS

							I HEREBY CERTIFY THAT THIS PLAN WAS PREPARED BY ME OR UNDER MY DIRECT SUPERVISION AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF	DRAWN BY DATE 08/04/2022		ANOKA COUNTY	
							THE STATE OF MINNESOTA. PRINT NAME:	DESIGN BY DATE 08/04/2022		HIGHWAY DEPT.	
NO NAME: F	DATE \23-01-00\CR	BY 70_(CSAH	CKD 24-223rd)\E	REVISION POSED\PROPOSED	03/14/2023 0 1.dgn	8:34:01 AM	DATE: LICENSE NO	CHECKED BY CSO DATE DATE	ANOKA COUNTY		COUNTY PRO

ON NOTES

DETAILS

APPROACHES. CONTRACTOR IS RESPONSIBILE FOR

ORE STARTING OPERATION.

AT THE RECLAIM AREA LIMITS TO CREATE A SMOOTH TRANSITION ENT

N POINTS AND REUSED ON SITE.

ANCE AND GRAVEL STREET APPROACH.

AND/OR DETAIL MILLING AREAS AS IDENTIFIED IN THE PLAN.

SHALL BE PAVED AFTER MAINLINE AND BEFORE FINAL STRIPING.


INLINE, AND BEFORE FINAL STRIPING. SEE BIT STREET SUMMARY. NG MAILBOX LOCATION OR AS DIRECTED BY THE LOCAL POSTAL & CONTACTING. MAILBOX REMOVAL AND ALL MATERIALS ARE


M TO, AND BE INSTALLED IN ACCORDANCE WITH, THE MOST AL ON UNIFORM TRAFFIC CONTROL DEVICES". "DO NOT PASS, P HERE ON RED SIGNS SHALL BE INPLACE WHENEVER SENT.

PROJECT, SHALL BE INSTALLED 10 DAYS PRIOR TO ANY R DETAILS.

E APPLIED AS SOON AS POSSIBLE ON MILLED SURFACE AND EACH E BEFORE THE CONTRACTOR LEAVES FOR THE DAY. RIPING.


OURS OF COMPLETION OF MAINLINE WEAR COURSE PAVING.

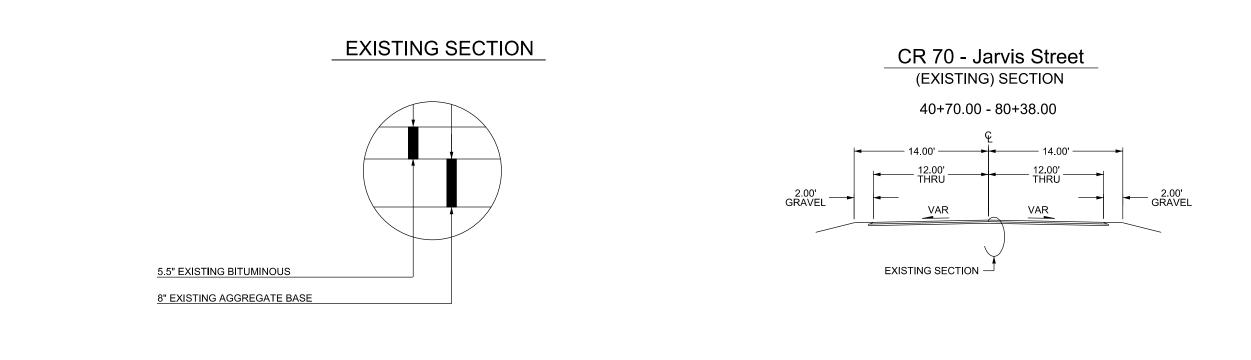

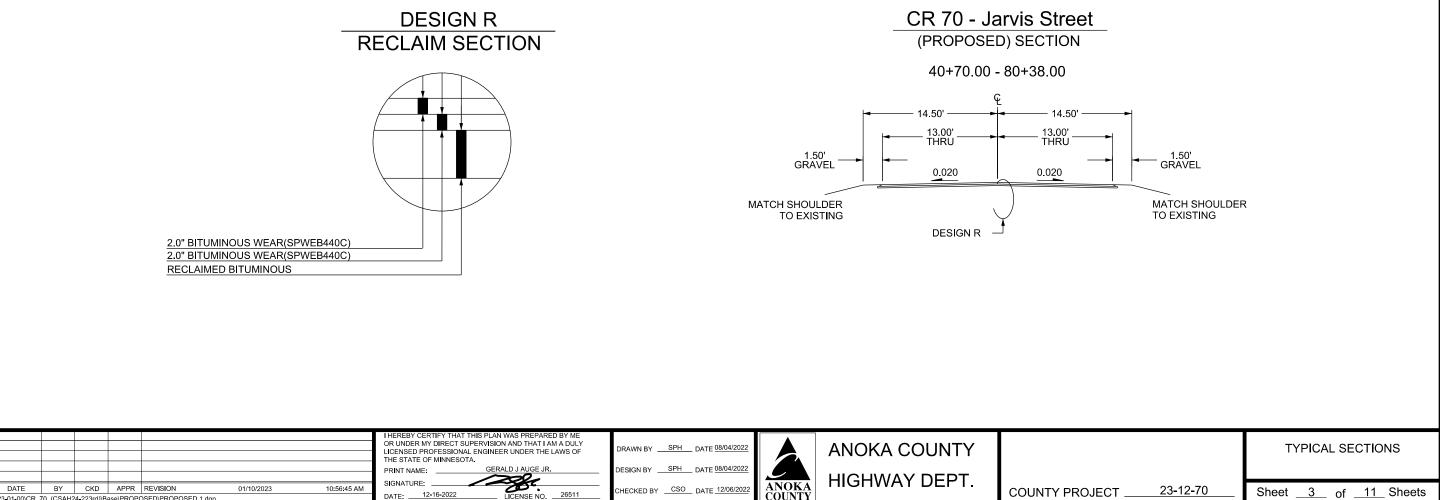



							I HEREBY CERTIFY THAT THIS PLAN WAS PREPARED BY ME OR UNDER MY DIRECT SUPERVISION AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MINNESOTA. PRINT NAME: GERALD J AUGE JR.	DRAWN BY <u>SPH</u> DATE <u>08/04/2022</u> DESIGN BY <u>SPH</u> DATE <u>08/04/2022</u>		ANOKA COUNTY HIGHWAY DEPT.	
NO	DATE	BY CKD	APPR	REVISION	01/10/2023	10:56:45 AM	SIGNATURE:	CHECKED BYCSO DATE _12/06/2022	ANOKA	TIIGHWAT DEFT.	COUNTY PRC
NAME: F	23-01-00\CR_7	70_(CSAH24-223rd)\B	ase\PROP	OSED\PROPOSED 1.dgr	1		DATE:		COUNTY		COUNTING


MAINLINE JOINT DETAIL (RECLAIM)

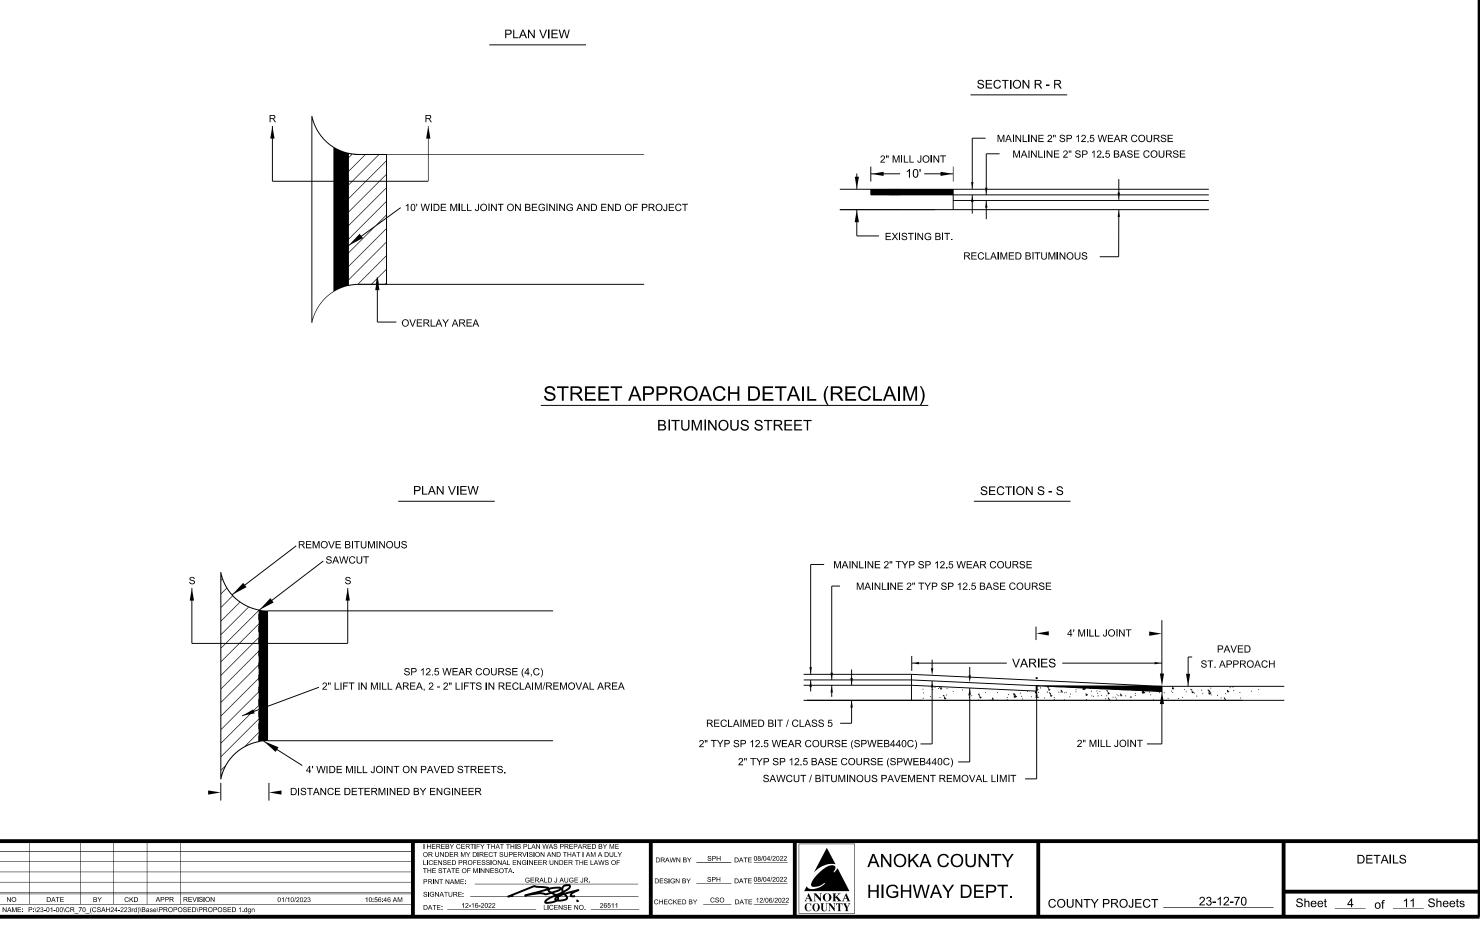

NO

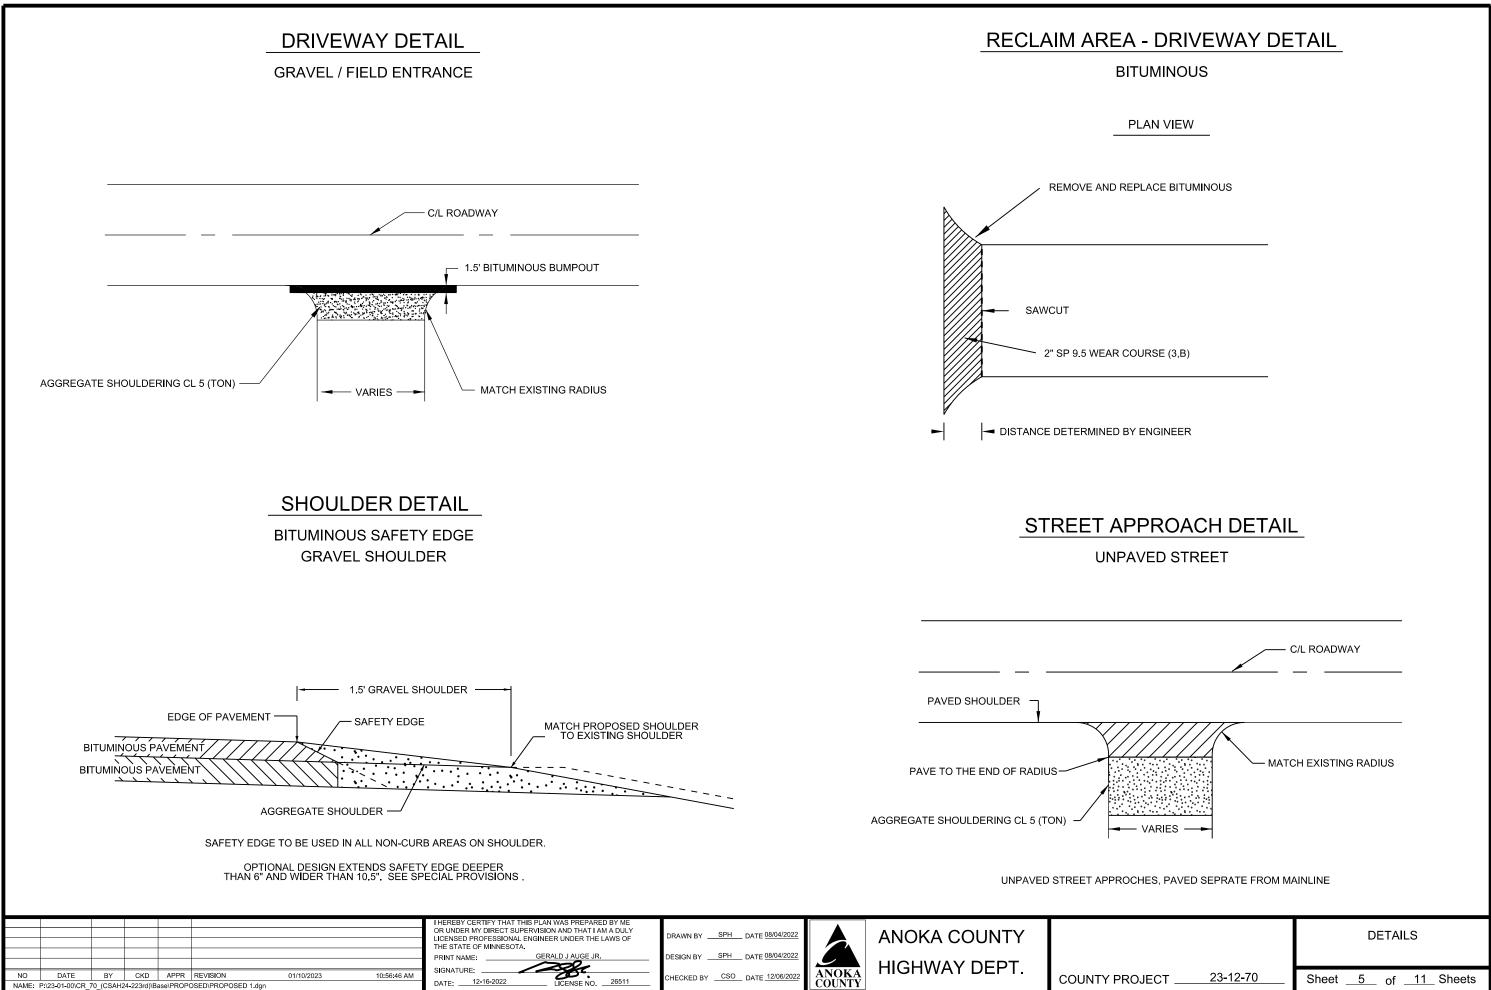

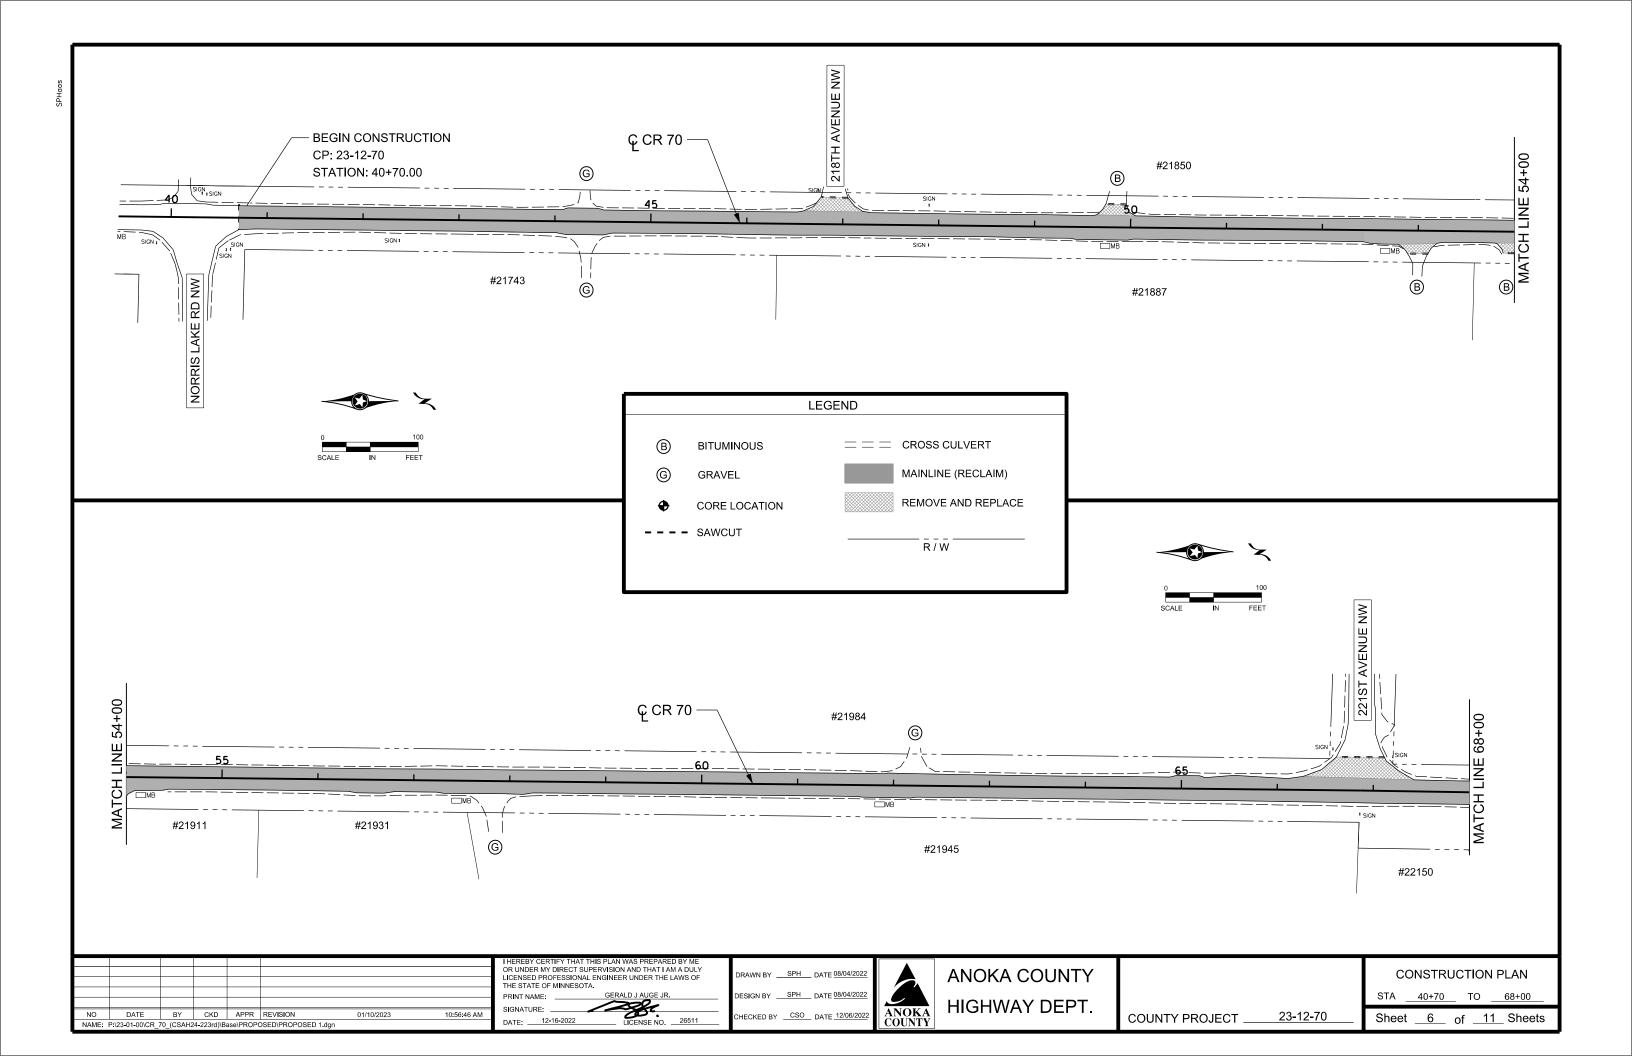

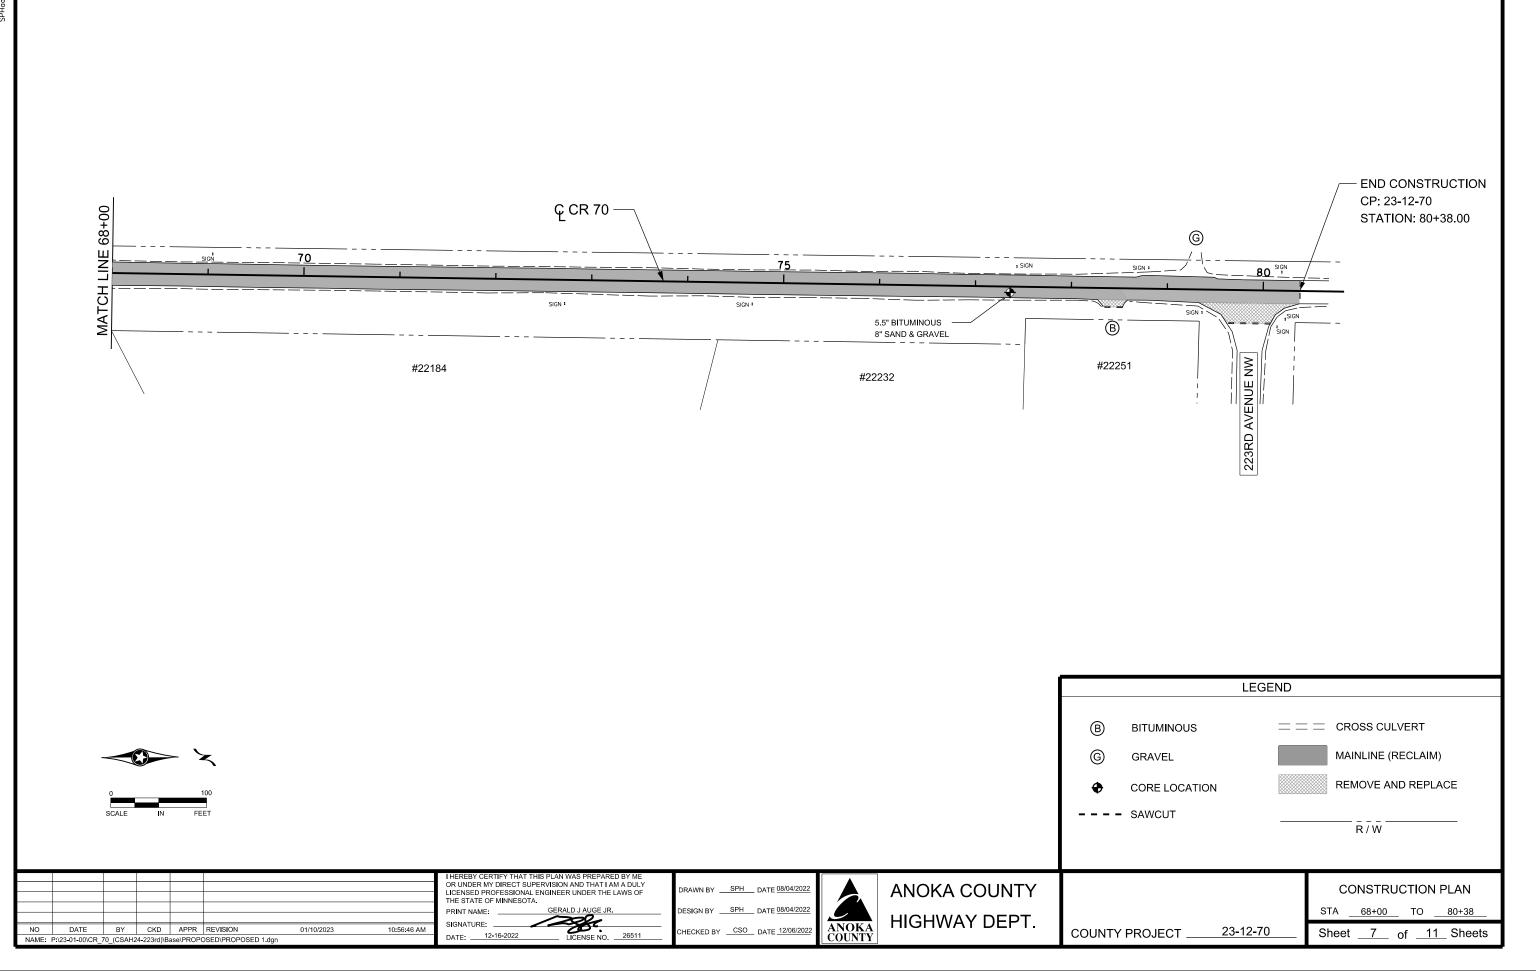

i

PERMANENT PAVEMENT MARKING PLAN NOTES AND GUIDELINES

GENERAL INFORMATION:

THE ENGINEER'S INVOLVEMENT IN THE APPLICATION OF THE MATERIAL SHALL BE LIMITED TO FIELD CONSULTATION AND INSPECTION. ANOKA COUNTY HIGHWAY DEPARTMENT WILL PLACE NECESSARY "SPOTTING" AT APPROPRIATE POINTS TO PROVIDE HORIZONTAL CONTROL FOR STRIPING AND TO DETERMINE NECESSARY STARTING AND CUTOFF POINTS. LONGITUDINAL JOINTS, PAVEMENT EDGES AND EXISTING MARKINGS MAY SERVE AS HORIZONTAL CONTROL WHEN SO DIRECTED.

EDGE LINES AND LANE LINES ARE TO BE BROKEN ONLY AT INTERSECTIONS WITH PUBLIC ROADS AND AT PRIVATE ENTRANCES IF THEY ARE CONTROLLED BY A YIELD SIGN, STOP SIGN OR TRAFFIC SIGNAL. THE BREAK POINT IS TO BE AT THE START OF THE RADIUS FOR THE INTERSECTION OR AT MARKED STOP LINES OR CROSSWALKS.

A TOLERANCE OF $\frac{1}{4}$ INCH UNDER OR $\frac{1}{4}$ INCH OVER THE SPECIFIED WIDTH WILL BE ALLOWED FOR STRIPING PROVIDED THE VARIATION IS GRADUAL AND DOES NOT DETRACT FROM THE GENERAL APPEARANCE. BROKEN LINE SEGMENTS MAY VARY UP TO ONE-HALF FOOT FROM THE SPECIFIED LENGTHS PROVIDED THE OVER AND UNDER VARIATIONS ARE REASONABLY COMPENSATORY. ALIGNMENT DEVIATIONS FROM THE CONTROL GUIDE SHALL NOT EXCEED 1 INCH. MATERIAL SHALL NOT BE APPLIED OVER LONGITUDINAL JOINTS. ESTABLISHMENT OF APPLICATION TOLERANCES SHALL NOT RELIEVE THE CONTRACTOR OF THEIR RESPONSIBILITY TO COMPLY AS CLOSELY AS PRACTICABLE WITH THE PLANNED DIMENSIONS.

MULTI COMPONENT (MULTI COMP):

THE ROAD SURFACE SHALL BE CLEANED AT THE DIRECTION OF THE ENGINEER JUST PRIOR TO APPLICATION. PAVEMENT CLEANING SHALL CONSIST OF AT LEAST BRUSHING WITH A ROTARY BROOM (NON-METALLIC) OR AS RECOMMENDED BY THE MATERIAL MANUFACTURER AND ACCEPTABLE TO THE ENGINEER. NEW PORTLAND CEMENT CONCRETE SURFACES SHALL BE SANDBLAST CLEANED TO REMOVE ANY SURFACE TREATMENT AND/OR LAITANCE ON LOW SPEED (SPEED LIMIT 35 MPH OR LESS) URBAN PORTLAND CEMENT CONCRETE ROADWAYS. SANDBLAST CLEANING SHALL BE USED FOR ALL MULTI COMP PAVEMENT MARKINGS.

THE MULTI COMP MARKING APPLICATION SHALL IMMEDIATELY FOLLOW THE PAVEMENT CLEANING. GLASS BEADS SHALL BE APPLIED IMMEDIATELY AFTER APPLICATION OF THE MULTI COMP LINE TO PROVIDE AN IMMEDIATE NO-TRACK SYSTEM.

A MULTI COMP LINE SHALL BE APPLIED WITH A MINIMUM THICKNESS OF 20 MILS (WET) AND 4" WIDE . GLASS BEADS SHALL BE APPLIED AT A MINIMUM RATE OF 25LBS POUNDS PER GALLON RATE SUFFICIENT TO ACHIEVE AN ACCEPTABLE NO-TRACK SYSTEM.

OPERATIONS SHALL BE CONDUCTED ONLY WHEN THE ROAD PAVEMENT SURFACE TEMPERATURES ARE 50 DEGREES FAHRENHEIT OR GREATER.

PERMANENT PAVEMENT MARKINGS SHALL NOT BE PLACED OVER TEMPORARY TAPE MARKINGS.

PREFORMED THERMOPLASTIC:

THE PREFORMED THERMOPLASTIC MARKINGS SHALL BE APPLIED IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS ON CLEAN AND DRY SURFACES. SEE SPECIAL PROVISIONS FOR PREFORMED THERMOPLASTIC MARKING SPECIFICATIONS.

PAINT:

AT THE TIME OF APPLYING THE MARKING MATERIAL, THE APPLICATION AREA SHALL BE FREE OF CONTAMINATION. THE CONTRACTOR SHALL CLEAN THE ROADWAY SURFACE PRIOR TO THE LINE APPLICAITON IN A MANNER AND TO THE EXTENT REQUIRED BY THE ENGINEER.

GLASS BEADS SHALL BE APPLIED IMMEDIATELY AFTER APPLICATION OF THE PAINT LINE.


EXCEPT WHEN USED AS A TEMPORARY MARKING, PAVEMENT MARKINGS SHALL ONLY BE APPLIED IN SEASONABLE WEATHER WHEN AIR TEMPERATURE IS 50 DEGREES FARHENHEIT OR HIGHER AND SHALL NOT BE APPLIED WHEN THE WIND OR OTHER CONDITIONS CAUSE A FILD OR DUST TO BE DEPOSITED ON THE PAVEMENT SURFACE AFTER CLEANING AND BEFORE THE MARKING MATERIAL CAN BE APPLIED.


THE FILLING OF TANKS, POURING OF MATERIALS OR CLEANING OF EQUIPMENT SHALL NOT BE PERFORMED ON UNPROTECTED PAVEMENT SURFACES UNLESS ADEQUATE PROVISIONS ARE MADE TO PREVENT SPILLAGE OF MATERIAL.

PAVEMENT MARKING TABULATION							
ПЕМ	UNIT	TOTAL QUANTITY	NOTES				
4" SOLID LINE MULTICOMP GROUND IN (WHITE)	LIN FT	7850					
4" SOLID LINE MULTICOMP GROUND IN (Y ELLOW)	LIN FT	1820					
4" BROKEN LINE MULTICOMP GROUND IN (YELLOW)	LIN FT	780	1				


1 10' STRIPE, 40' GAP

1	02/27/23	TMV	JRB	02/28/23		I HEREBY CERTIFY THAT THIS PLAN WAS PREPARED BY ME OR UNDER MY DIRECT	DRAWN BY TMV DATE 09/22/22		
						SUPERVISION AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER	DRAWN BI DATE		ANOKA
						THE LAWS OF THE STATE OF MINNESOTA.			
						PRINT NAME: JORGE R. BERNAL DELGADO DATE: 02-28-23	DESIGN BY <u>TMV</u> DATE <u>09/22/22</u>		
NO	DATE	BY	CKD	APPR	REVISION	1 trend -	CHECKED BY JRB DATE 10/24/22	ANOKA COUNTY	HIGHW
NAME:	P:\23-01-00\0	CR_70_(C	SAH 24-2	223RD)\Ba	se\Traffic\Perm Pvmt Mrkg Guide Notes 2021.dwg	SIGNATURE:LICENSE NO. 57216	CHECKED B1 DATE	COUNTY	

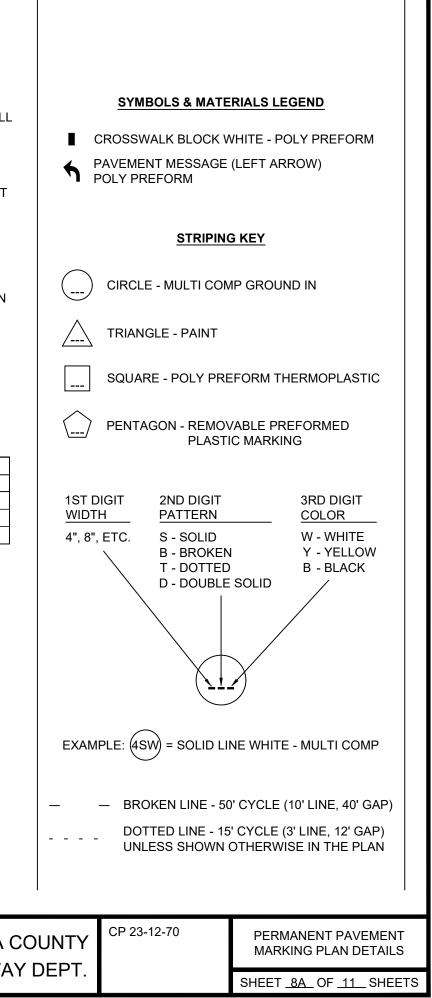

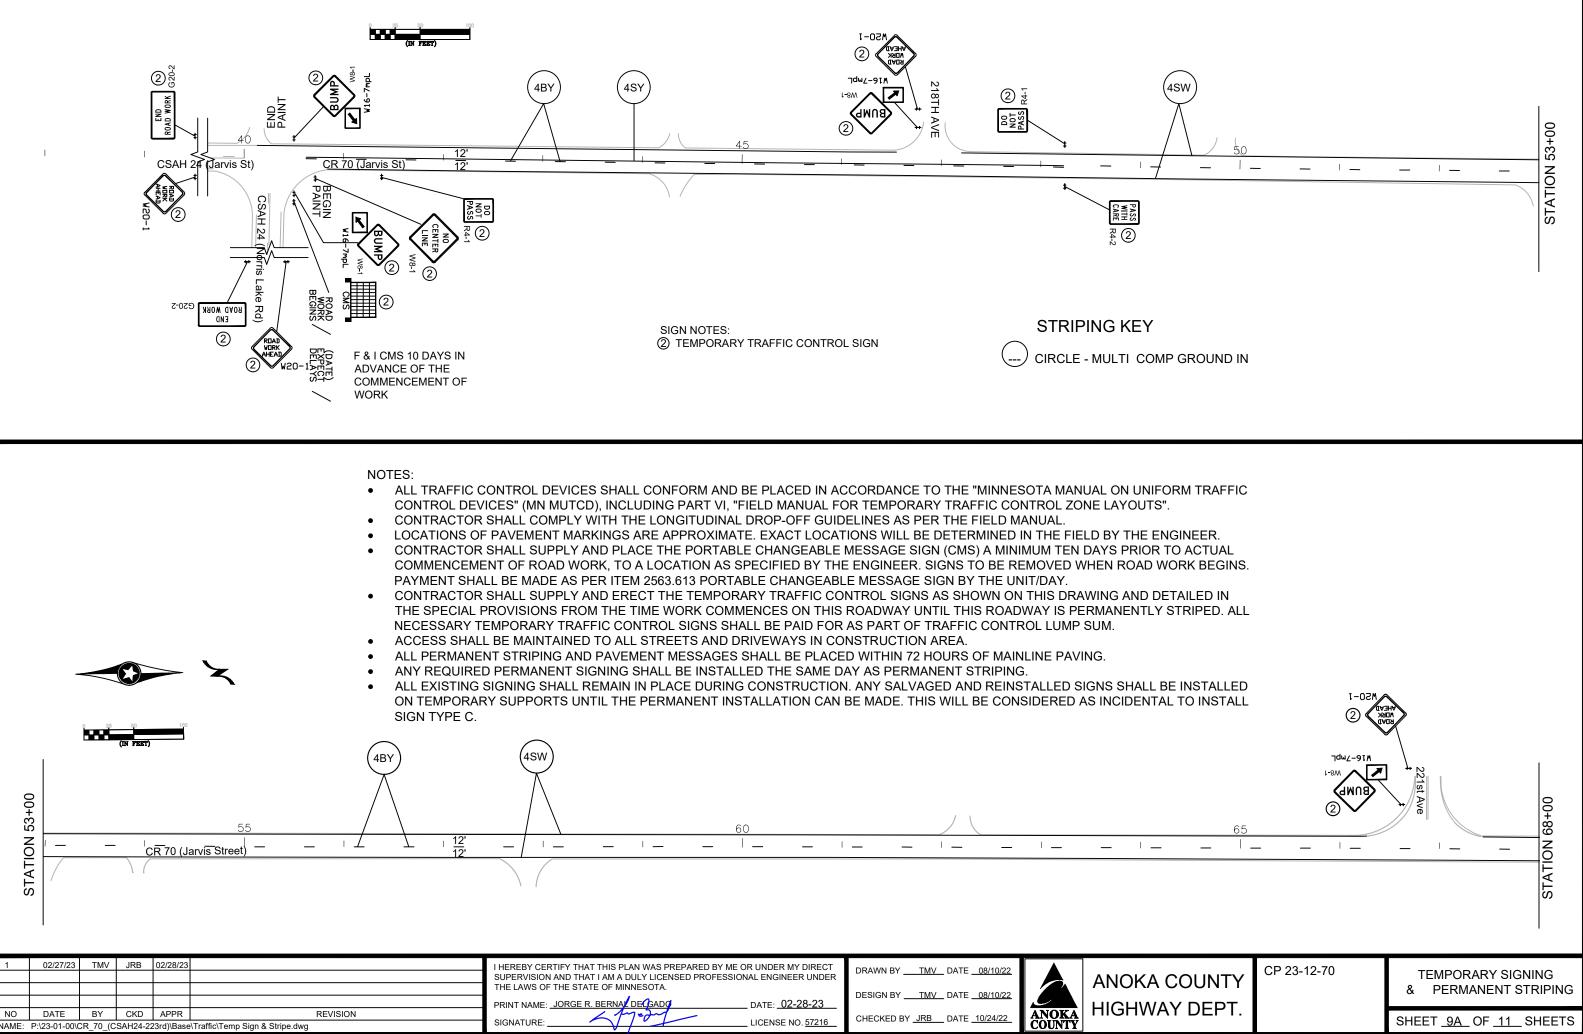

1	02/27/23	TMV	JRB	02/28/23		I HEREBY CERTIFY THAT THIS PLAN WAS PREPARED BY ME OR UNDER MY DIRECT	DRAWN BY TMV DATE 08/10/22		
						SUPERVISION AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER	DRAWN BY <u>TMV</u> DATE <u>08/10/22</u>		ANOK
						THE LAWS OF THE STATE OF MINNESOTA.	DESIGN BYTMVDATE08/10/22		
						PRINT NAME: JORGE R. BERNAL DELGADO DATE: 02-28-23			HIGH
NO	DATE	BY	CKD	APPR	REVISION	and the first in state	CHECKED BY JRB DATE 10/24/22	ANOKA	
NAME:	P:\23-01-00\0	CR_70_(C	SAH24-2	23rd)\Base	\Traffic\Temp Sign & Stripe.dwg	SIGNATURE:LICENSE NO. 57216		COUNTY	

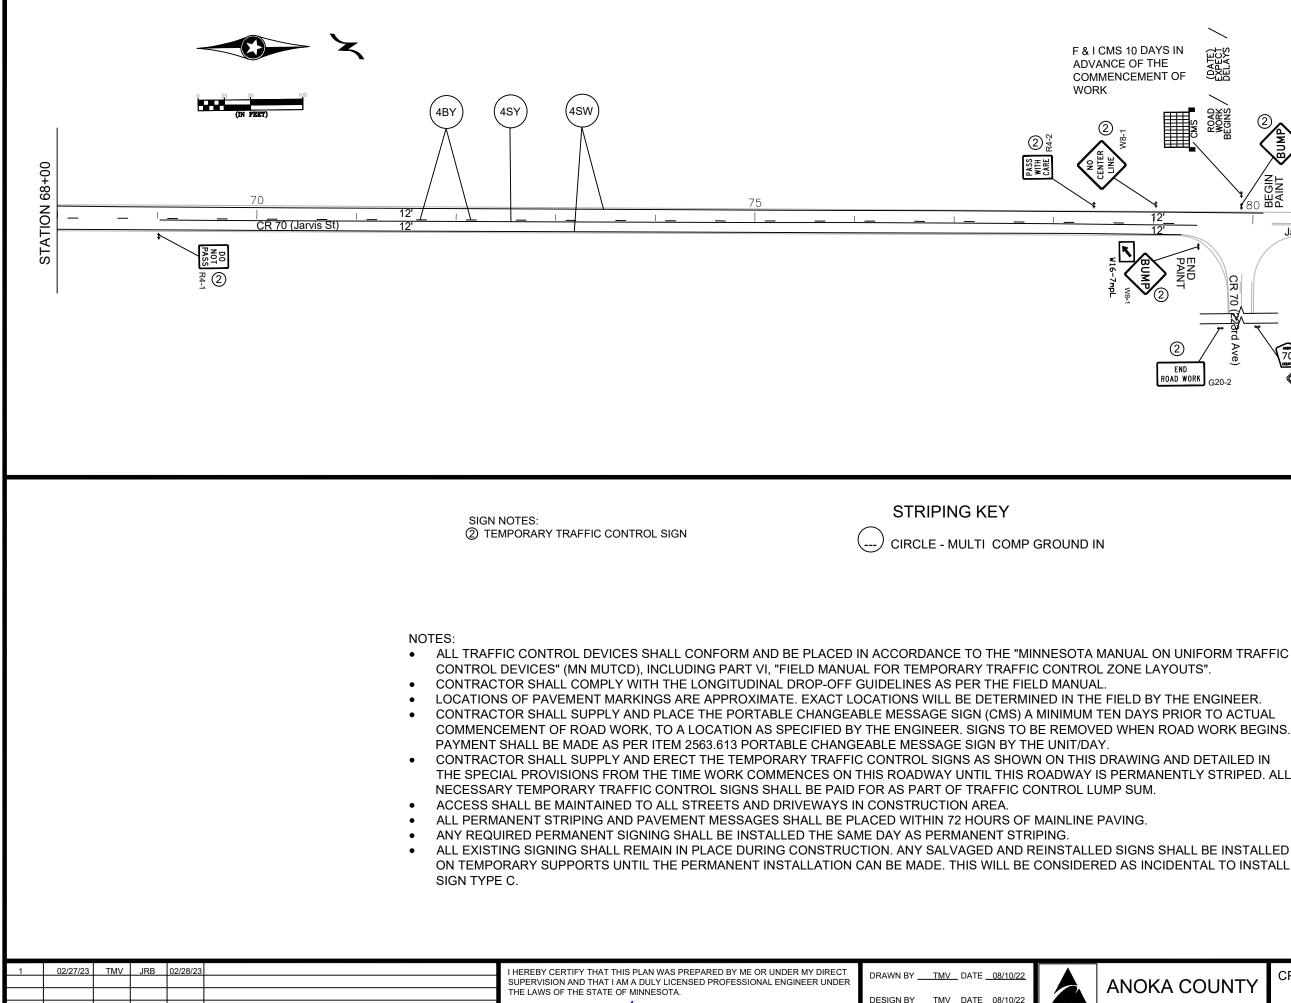

PRINT NAME

SIGNATUR

NAME:	P:\23-01-00\0	CR_70_(C	SAH24-22	3rd)\Base	\Traffic\Temp	Sign & Stripe.dwg

REVISION

NO DATE BY CKD APPR

DATE: 02-28-23 LICENSE NO. 57216

CHECKED BY JRB DATE 10/24/22

ANOKA COUNTY

	ROAD (DATE) WORK EXPECT BEGINS DELAYS	2		
CMS	₩ ¥8	EGIN AINT BUMF	M16-7mpL	WEDAU WEAN WED-1
END	CR 70 (223rd Ave)	Jar	Street ↓	C END WORK G20-2
D	G20-2	70	(2) RBAD WDRK AHEAD W20-1	

CP 23-12-70 **TEMPORARY SIGNING** & PERMANENT STRIPING HIGHWAY DEPT. SHEET <u>10A</u> OF <u>11</u> SHEETS

_		PORARY TRAFFIC			CONTROL SIG
UZ NW		MSERT	Cedentity	1005 255 15 15 15 15 15 15 15 15 15 15 15 15 1	Cuanting
W8-12	48" x 48"	CENTER	2	W8-9 48" x 48"	AS NEEDED
R4-1	24" x 30"		3	W8-11 48" x 48"	AS NEEDED
R4-2	24" x 30"	PASS WITH CARE	2	W8-23 48" x 48"	AS NEEDED
G20-2	36" x 18"	END Read Work	4	M1-6M 24" x 24" W20-1 48" x 48"	1 AS NEEDED
W8-1 W16-7F	48" x 48" 30" x 18"	BUMP	6	W20-4 48" x 48"	(ESTIMATED 6) AS NEEDED
W3-4	48" x 48"	BE PREPARED TO STOP	AS NEEDED	W20-7 48" x 48"	AS NEEDED (ESTIMATED 2)
W8-1	48" x 48"	BUMP AHEAD	AS NEEDED	REFLECTORIZED REBOUNDABLE DRUM	AS NEEDED (ESTIMATED 10)
W8-8	48" x 48"	RDUGH	AS NEEDED	CMS sign to be placed a minimum of ten days prior to actual commencement of road work. Signs to be removed when road work begins.	2 AT 10 DAYS EA

CHANGEABLE MESSAGE BOARD - MESSAGE SEQUENCE LAYOUT

		R	0	А	D			<	D	Α	Т	E	>	
		W	0	R	Κ			Ε	X	Ρ	E	С	Т	
	В	Е	G	I	Ν	S		D	E	L	Α	Y	S	

.

CMS SIGN TO BE PLACED A MINIMUM OF TEN DAYS PRIOR TO ACTUAL COMMENCEMENT OF ROAD WORK. SIGNS TO BE REMOVED WHEN ROAD WORK BEGINS.

.

: ::	 <u></u>				· · · · · · · · · · · · · · · · · · ·	I HEREBY CERTIFY THAT THIS PLAN WAS PREPARED BY ME OR UNDER MY DIRECT SUPERVISION AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MINNESOTA.	DRAWN BY DATE08/10/22		
_						PRINT NAME: JORGE R. BERNAL/DELGADO DATE: 11-8-22	DESIGN BYTMVDATE08/10/22		HIGHWAY
	 DATE	BY CR_70_((CKD CSAH24-2	APPR 23rd)\Base	REVISION	SIGNATURE:LICENSE NO. 57216	CHECKED BY JRB DATE 10/24/22	ANOKA COUNTY	

	CP 23-12-70	TEMPORARY SIGNING QUANTITIES
OEPT.		SHEET 11 OF 11 SHEETS