

Description of County Ditch No. 56

MAIN DITCH Commencing at a point 430 feet North of the North East corner of Government Lot 7 Section 15 Township 33 Range 23, thence Southeasterly through said Sec 15 thence Southeasterly through Sec 23 and Sec. 26 to its outlet in Coon Lake in Sec. 26 , all in Township 33 Range 23.

BRANCH ONE Commencing at a point in the S.E.1-4 of N.E. 1-4 of Sec. 22 Township 33 Range 23, thence Southeasterly through Sec. 22 and Sec. 27 and into Sec. 26 to its outlet in the Main ditch in the N.W. 1-4 of the S.E. 1-4 of Sec. 26 all in Township 33 range 23

TOTAL ESTIMATED COST OF COUNTY DITCH NO. 56

	<i>Original</i>	<i>Amended</i>
Sheriff's fees -----	\$ 12.00	
Register of Deeds fees -----	10.00	
Auditors fees -----	100.00	
Attorneys fees -----	75.00	
Legal Publications -----	65.00	
Survey and Report -----	327.45	
Supervision -----	150.00	
Viewers Report -----	80.00	
Commissioners meetings -----	85.00	
Estimated cost of construction -----	<del>3947.11</del> 4088.20 3947.11	3158.65 <hr/> 4063.10
TOTAL	<del>\$ 4992.65</del> \$ 4992.65	

Original Report

SUMMARY OF COST OF CONSTRUCTION  
and  
MANNER and TIME OF COMPLETION.



	Cu. yards	Cost of digging etc.
Main Ditch	<del>17242</del> <del>13100</del>	2742.40 \$ 2601.31
Branch	8972	1345.80
TOTAL	<del>24081</del> 26214	<del>\$ 3947.41</del> \$ 4088.20

Main Ditch and Branch to be hand work and to be completed  
on or before Oct. 1st. 1916

Ammended Report

Main Ditch	14,392	# 2314.90
Branch	5625	842.75
Total	<u>20017 cu yds</u>	<u>\$ 3158.65</u>

Plan of Cribbing on Main Ditch  
(Sta. 151+51 to 153+53)

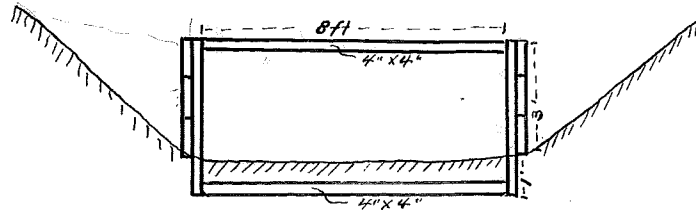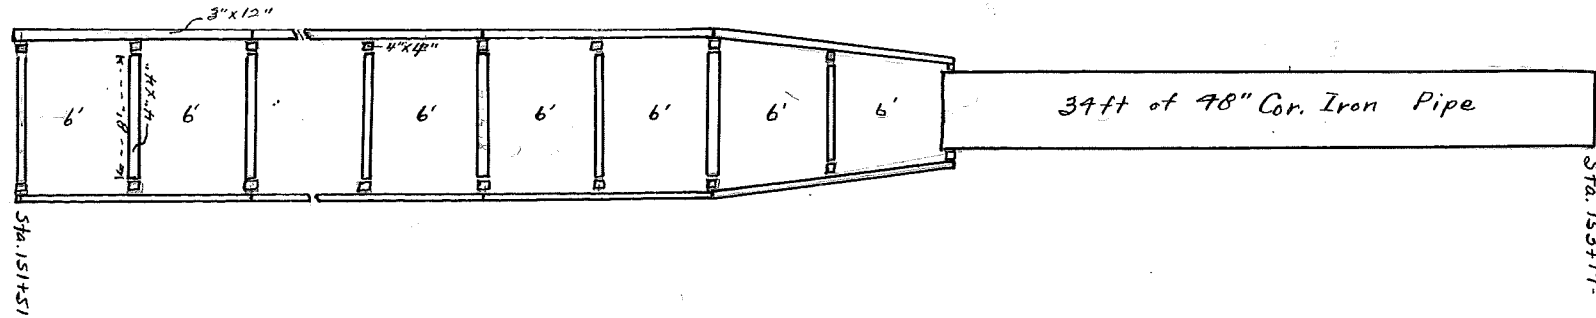

Note: This plan to be followed if Cribbing is ordered in as extra work.

ESTIMATE OF COST

32 - 4x4" x 4ft	-----	170 2/3 B.M. @ \$28 <sup>00</sup> per M.	-----	\$ 4.78
28 - 4x4" x 8ft	-----	298 2/3 B.M. @ \$28 <sup>00</sup> per M.	-----	8.36
84 - 3x12" x 12ft	-----	3024 B.M. @ \$30 <sup>00</sup> per M.	-----	90.72
Labor, etc.	-----		-----	75.00
		Total	-----	\$178.86