NOT VALID UNLESS SIGNED BY ANOKA COUNTY **PERMIT NUMBER**

Anoka County MINNESOTA

ANOKA COUNTY TRANSPORTATION DIVISION 1440 BUNKER LAKE BLVD NW ANDOVER, MN 55304

763-324-3176

highwaypermits@anokacountymn.gov

RIGHT OF WAY X COMMERCIAL ACCESS

APPLICATION FOR PERMIT FOR INSTALLATION OF UTILITIES OR PLACING OBSTRUCTIONS ON THE COUNTY HIGHWAY SYSTEM ALL APPLICANTS MUST BE REGISTERED PRIOR TO PERMIT APPROVAL

APPLICANT NAME CenterPoint Energy CONTACT PERSON Jake Jacobson

ADDRESS 505 Nicollet Mall - Floor 4 PO Box 59038 CITY Minneapolis, MN 55459

PHONE NUMBER 612-321-4475 EMAIL JAKE.JACOBSON@centerpointenergy.com

COMPANY OR INDIVIDUAL PERFORMING WORK Michels Utility Services

CONTACT PERSON Jake Jacobson EMAIL JAKE.JACOBSON@CENTERPOINTENERGY.COM

PHONE NUMBER 612-321-4475

PERMIT WORK TO START 08/01/2025

117321379/25-80852

PERMIT WORK TO BE COMPLETED 11/01/2025

DURATION OF JOB 3 days

ARE YOU BEING ASKED TO RELOCATE DUE TO A COUNTY PROJECT? Yes

ANOKA COUNTY PROJECT NUMBER SP 0208-169

WORK SITE ADDRESS 1560 109th Ave NE, Blaine, MN 55449

CITY Blaine

METHOD OF INSTALLATION/CONSTRUCTION Directional Bored

NATURE OF WORK RELOCATING GAS MAIN OFF HWY 65 FOR SP 0208-169

REPLACING GAS MAIN OFF HWY 65 FOR SP 0208-169. INSTALLING A SINGLE 2" PLASTIC GAS

MAIN CROSSING OF CR 12 AT BALTIMORE ST NE.

SURFACE TO BE DISTURBED SITE PLAN

IF THE ROADWAY IS ENCROACHED, YOU MUST ATTACH A TRAFFIC CONTROL PLAN AND/OR REFERENCE THE MOST CURRENT VERSION OF THE MN TEMPORARY TRAFFIC CONTROL FIELD MANUAL (3+ DAYS REQUIRES PLANS TO BE SIGNED BY A LICENSED PE).

X DITCH/BLVD

GRAVEL

BITUMINOUS

X CONCRETE

IS SIGNING AND STRIPING REQUIRED? NO **NONE**

DEPTH FROM SURFACE 60"+

(60" minimum under county roads)

SIZE AND KIND OF PIPE/CABLE 2" PE GAS MAIN

NUMBER OF EXCAVATIONS 2

SIZE OF EXCAVATIONS 5x5x4

(Length, width, and depth)

LOCATION OF EXCAVATIONS ALL EXCAVATIONS ARE TO BE PROTECTED AT ALL TIMES AND THEN BACKFILLED WHEN UNATTENDED AND/OR OVERNIGHT Specific written descriptions of excavations - if shown on attached drawing, drawing shall be specific with depth and distance from centerline, curb, or other distinguishable location. Traffic control plans cannot be approved without specific excavation descriptions.

ALONG THE SOUTH BLVD OF CR 12 AT BALTIMORE ST & DAVENPORT ST

THIS PERMIT COVERS THE RIGHT OF WAY IN ANOKA COUNTY ONLY

Docusign Envelope ID: 281AD694-A85C-4F1E-B252-C63D0A1E6A20



ANOKA COUNTY TRANSPORTATION DIVISION 1440 BUNKER LAKE BLVD NW ANDOVER, MN 55304

PERMIT PHONE: 763-324-3176 highwaypermits@anokacountymn.gov

GENERAL INFORMATION

One permit must be approved for each county road on which work will be performed prior to any work within the right of way by any utility/contractor. Emergency conditions which threaten the safety of the public and require immediate repair are exceptions to this rule. Under those circumstances, the utility/contractor is permitted to begin and/or complete the necessary repairs. The Anoka County Transportation Division (ACTD) shall be notified of emergency repairs as soon as feasible and a written permit is to be completed within two business days of occurrence.

A license-permit bond is generally required of the contractor as part of the registration process, the amount of which will be determined by the nature of the utility work.

A sketch or drawing shall accompany each permit application which will show the location of the proposed work/utility with reference to the county highway center line and right of way line. A complete set of plans is required for all sewer/water projects.

It shall be the responsibility of the applicant to determine which of the special conditions apply to each permit.

DEB32C66BD924B0

ACTD reserves the right to revoke any utility permit and halt work, if, upon inspection of any job site, the special conditions are not met, and/or a hazard exists for the applicant or public safety is threatened. The failure to comply with the terms and conditions of any applicable Federal, State, Regional, and local laws, rules and regulations, including any provision of Anoka County's Right-of-Way Ordinance shall be cause for immediate revocation of a permit.

The applicant shall notify ACTD immediately upon completion of project so that the ACTD can inspect the site to determine if restoration has been satisfactorily completed.

The undersigned hereby accepts the terms and conditions of this permit and the regulations of Anoka County, and agrees to fully comply therewith to the satisfaction of the ACTD. The county of Anoka, its officials, employees, and agents, shall be held harmless, by the applicant/permittee, from any demands, claims, lawsuits, or damages relating to the work described in this permit.

•				•	-	 · ·	 		•	
APPLI	CANT'S	SIGNAT	TURE	DocuSigned	by:			DATE	8/11/2025	
				1/USIPUL	HUWIUT			1		

AUTHORIZATION OF PERMIT

In consideration of the applicant's agreement to comply in all respects with the regulations of the ACTD covering such operations, permission is hereby granted for the work to be done as described in the above application. Said work to be done in accordance with the general conditions listed above and the special conditions required as hereby stated. It is expressly understood that this permit is conditioned upon replacement or restoration of the county highway and its right of way to their original or to a satisfactory condition. It is further understood that this permit is issued subject to the approval of local city or township authorities having joint supervision over said street or highway.

APPROVED BY:	DATE
TITLE: Traffic Technician	

NOT VALID UNLESS SIGNED BY ANOKA COUNTY



ANOKA COUNTY TRANSPORTATION DIVISION

1440 BUNKER LAKE BLVD NW ANDOVER, MN 55304

PERMIT PHONE: 763-324-3176

highwaypermits@anokacountymn.gov

SPECIAL CONDITIONS

TRAFFIC CONTROL

- 1) Detours
 - a) Detailed detour layouts shall be submitted to the traffic engineer for approval.
 - b) No detours shall be permitted without prior approval of the Anoka county traffic engineer.
 - c) A ten day notice must be given prior to the installation of any detour.
 - d) It shall be the responsibility of the applicant to notify Anoka county central communications, local government bodies, and any affected bus companies ten days prior to any road closures/detours.
 - e) Immediately upon completion of work and/or detours, all posts, barricades, and signs shall be removed from the right of way.
- 2) Traffic control devices
 - a) All traffic control devices, barricades, flashers, etc., shall be furnished by the applicant and shall be in accordance with the most recent edition of the Minnesota manual on uniform traffic control devices and temporary traffic control zone layouts – field manual of the same manual.

CONSTRUCTION REQUIREMENTS

- 1) Open cutting of bituminous or concrete surfaced roads will be allowed only at the discretion of the county engineer.
- 2) Neither supplies nor excavation materials shall be placed on the bituminous or concrete surface at any time.
- 3) No trenches will be allowed to remain open overnight.
- 4) Materials removed from the trench shall be used as backfill insofar as they are suitable. All backfill material shall conform to MNDOT specifications for compaction. The use of heavy equipment on top of trench, slapping with backhoe bucket and/or back casting to achieve compaction is prohibited. Any additional material required to back fill to the original grade shall be furnished by the applicant at no expense to the ACTD. All the base and surface courses damaged during construction operations shall be restored to a condition equal to or better than before operations began. The applicant shall be responsible for and restore any settlement.
- 5) All culverts, ditches, shoulders, and backslopes shall be restored to their original condition unless otherwise directed by the ACTD. Shoulders which have been previously constructed or reconstructed with special materials shall be replaced in kind. Restoration of signs, guardrails, guard posts, etc., are the sole responsibility of the applicant and shall be restored to their original condition.
- 6) All roadway maintenance required within the limits of the utility project that is related to the applicant's activities shall be the sole responsibility of the applicant for one year after completion of the project. Upon completion of the restoration work, the applicant shall request a final inspection by the ACTD. The ACTD's approved completion date shall be the starting date of the applicant's one-year responsibility.

HORIZONTAL BORING AND JACKING

- 1) All hard surface roadways shall be jacked or bored.
- 2) All crossings of Anoka County maintained roadbeds, shall be made by boring inside a casing or carrier pipe, or by jacking unless otherwise directed by the Anoka County Engineer. The auger shall lead the casing or carrier pipe by at least six inches whenever possible and never lead the carrier pipe by more than one inch.
- 3) The use of pneumatic devices to facilitate the roadbed crossings will be allowed in most cases with prior approval. In the event approval is not granted and applicant uses a pneumatic device to cross a roadbed and encounters an obstruction and/or unstable subbase material which makes forward or reverse motion of pneumatic device impossible, said pneumatic device then becomes part of the roadway subbase and permission to excavate to retrieve device will not be granted.
- 4) If a pneumatic device is used for the work permitted herein, the installation must be kept to a minimum of four feet below the surface of the roadway if the pneumatic device is less than two inches in diameter, and a minimum of five feet below the surface of the roadway if the pneumatic device is two inches in diameter or larger.

BITUMINOUS RESTORATION

- 1) The locations and dimensions of all openings to be made in the bituminous surface shall be approved by the ACTD prior to any cutting or any surface opening operations.
- 2) All openings in bituminous surfaces shall be cut in a straight line with the sides smooth and vertical. No ragged edges will be permitted. Cutting shall be done with a concrete saw.
- 3) All necessary dust control operations shall be carried out by the applicant at no expense to Anoka County.
- 4) The minimum requirement for subgrade replacement shall be the upper twelve inches of material and shall meet MNDOT specifications for class five placed in six inch layers compacted to one hundred percent of optimum density.
- 5) All manhole casings, gate valves, and other utility structures shall be set one quarter inch below the top of the finished surface.
- 6) Bituminous tack coat materials and application thereof shall conform to MNDOT specification 2357.
- 7) All bituminous surfacing shall be replaced as soon as practicable after the base construction. All bituminous surfacing shall be machine laid. Any exceptions must be approved by the ACTD. Bituminous surfacing shall be replaced to original pavement depth or to a minimum of six inches of bituminous mixture (2360), whichever is greater. Bituminous mixtures must be placed in lifts not exceeding three inches in thickness for base and binder courses and not exceeding two inches for the wear course.
- 8) All surface restoration regardless of size shall conform to existing grades.
- 9) Any unnecessary or negligent damage to bituminous surface in conjunction with the installation and/or repair of a utility shall be cut out and replaced in kind as directed by the ACTD.



ANOKA COUNTY TRANSPORTATION DIVISION 1440 BUNKER LAKE BLVD NW

ANDOVER, MN 55304

PERMIT PHONE: 763-324-3176

highwaypermits@anokacountymn.gov

CONCRETE RESTORATION

1) Curb and gutter, sidewalks, and driveways shall be restored in accordance with MNDOT specifications 2531 and 2521.

UTILITY LINES

- There shall be only a single pole line on the county right of way on either side of the center line thereof.
- 2) Exact locations of longitudinal installations on county highways shall be located as directed by the ACTD.

SECTION CORNER MONUMENTS


- Utility locations shall not interfere with the location of any section, quarter, witness, or right of way monuments. For assistance in locations, contact the Anoka County Surveyor's Office.
- The applicant shall be responsible for replacement of any existing property irons disturbed during construction.
- The applicant shall notify the Anoka County Surveyor's Office three working days in advance of any anticipated disturbance of any section, quarter, witness, or right of way monuments.
- Any monument disturbed during the course of construction, shall be reset by the Anoka County Surveyor's Office at the expense of the applicant.

ATTACHING TO BRIDGES/STRUCTURES

No utility is permitted to be hung from, or otherwise attached to, any bridge or structure without having detailed plans approved by the Anoka County Engineer. These plans are to show approaches to the structure, method of installation, type, and dimension of housing for the utility.

ADDITIONAL PROVISIONS

- All subcontractors, installers, and crew shall possess a physical or electronic copy of all documents in relation to the approved permit prior to the commencement of work and be kept on site. This includes, but it not limited to the following:
 - a) Approved permit
 - b) Any/all traffic control plans and/or layouts
- Shall notify Anoka County Permits at 763-324-3176 or highwaypermits@anokacountymn.gov
 - a) At least 36 hours prior to the commencement of work
 - b) With time frame of proposed of work
 - c) Anticipated traffic control
 - d) When work is complete including restorations to request a final inspection
- No work during inclement weather or when plows are out in any capacity
- All traffic control shall be in accordance with the most current version of the MnDOT Temporary Traffic Control Field Manual
- For staking of right-of way or proposed infrastructure, contact Chris Osterhus at 763-324-3189 a minimum of 48 hours prior to the commencement of work.



CONSTRUCTION NOTES NOTE: BORE ALL PAVED STREETS AND DRIVEWAYS CONSTRUCTION PROCEDURES CORROSION TECH FOR AREA IS Pipe ≤ 4-inches Diameter (Unregulated PCB area): When butt fusing to existing in-service polyethylene, visually inspect for the presence of hydrocarbon Minimum depth requirements for crossings of state highways Project area cleared for internal impacts. Pipe being removed is permeation immediately after removing fusion iron. If any bubbling is identified on the heated ROSS BARKER, CELL 952-322-0383 Obtain Construction Plans from Designer prior to starting job. Install; Clean and Test; and Put in Service; Proposed new main per and county roads is 60". Minimum depth requirements for surface, do not join to new PE pipe. Allow to cool and cut this end off (12" length) and send to the unregulated for disposal if coating does not exist or is non-asbestos. crossings of city streets and township roads is 48". CenterPoint Energy Construction and Services Manual. Refer to CNP Construction and Service Manual CS-B-1.110, Golden Valley Lab with street location and W.O. #. Complete tie- in/extension using an electrofusion Coordinate with Contractor / Engineering Firm for exact locations of Minimum depth for parallel installations on state highways and CS-B-1.330, and CS-B-1.100, for pipe to be abandoned. coupling(s). proposed structures and facilities prior to installation of gas facilities. county roads is 36". Minimum depth for parallel installations Procedure for tapping or making tie-ins to existing gas mains: Verify existing gas main size, type, and location prior to tapping or making tie-in. Monitor and Document in field notes. on city streets and township roads is 30". All steel pipe welds Install new main as shown or as directed in field at time of installation. verify, using a pressure gauge, existing gas main Pressure Class within the bell to be coated with 2 part epoxy. Contact Engineering for approval of field generated changes. hole of tap location or tie-in location prior to tapping or making tie-in. Long side mains and services to be installed below proposed Purge new main until essentially 100% reading is obtained on Combustible Gas Indicator. See CenterPoint Energy Construction and Service Manual Section CS-B-1.230 for purging mains into service. sub-cuts (See Construction Plans). All test points should be installed in the boulevard or other acceptable locations and avoid placement in driving lanes. Complete all Service / Meter Work as directed. (See Service Survey) Verify Coating test results if required prior to abandoning main. See Abandonment Procedures for abandonment and purging procedures. Install a marker ball at a new end of main, at a valve, at each ell of a horizontal offset, at road crossings and at any fitting or pressure EXISTING: 2" X 2" HVPT (38143646) control identified as needing to be located in the future. Refer to @132' NCL CSAH 12 CenterPoint Energy Construction and Service Manual section @23' ECL BALTIMORE ST NE CS-B-1.310 for installation procedures. INSTALL: 2" X 2" HVPT @140' NCL CSAH 12 2" PE 90 DEG ELL **@5' WEL BALTIMORE ST NE** EXTEND: 2" PE CL-6 SOUTH CUT & ABDN: 2" PE CL-6 SOUTH 10930 129' NCL WBL 23' ECL $\overline{\Box}$ INTENT IS TO INSTALL 4" PE CL-6 MAIN EAST OF — PROPOSED STRUCTURES #5383 & 5387 SEE SP 0208-169 - SHEET 726 CSAH 12 (109 AVE NE) 🛱 🛕 160° CSAH 12 (109 AVE NE) **←w**→ **←w+** _**-w-**4" TR CL - 6 (38143646) [50 PSIG] TR CL - 6 (38143646) [50 PSIG] 4" TR CL - 6 (38143646) [50 PSIG] EXISTING: 4" X 2" HVPT (38143646) @58' SCL CSAH 12 @21' ECL BALTIMORE ST NE -1540 CUT & ABDN: 2" TR CL-6 NORTH USE: 2" PE CAP 1450 1430 -EXISTING: 4" PE FULL FLOW TEE (38143646) -@59' SCL CSAH 12 @37' WCL VICTORY BLVD INSTALL: 4" X 2" HVPT @34' WCL VICTORY BLVD EXTEND: 2" PE CL-6 NORTH 1440 1420 1510 1570 **INSTALL: 2" PE CAP TO COVER** EXISTING: 3" TR CL-6 (A71882002) **END SERVICE # 1430** @47' WCL VICTORY VILLAGE BLVD INSTALL: 3" X 2" HVPT @2' SOUTH OF CURB EXTEND: 2" PE CL-6 WEST PHONE#: 612-321-4475 I hereby certify that this plan, specification, or report was prepared DRAWN BY: JAKE JACOBSON by me or under my direct supervision and that I am a duly Licensed DESIGN DATE: 06/25/2025 Professional Engineer under the laws of the state of Minnesota. **REVISION INFO:** Typed or Printed Name: _{Date:} _6/27/2025 _ License Number: 56613

> SCALE: 60':1" SHEET 1 OF 1 SS#: #

CONSTRUCTION NOTES

sub-cuts (See Construction Plans).

Obtain Construction Plans from Designer prior to starting job.

Coordinate with Contractor / Engineering Firm for exact locations of proposed structures and facilities prior to installation of gas facilities. Install new main as shown or as directed in field at time of installation.

Contact Engineering for approval of field generated changes. Long side mains and services to be installed below proposed

All test points should be installed in the boulevard or other acceptable locations and avoid placement in driving lanes.

Verify Coating test results if required prior to abandoning main.

INTENT IS TO INSTALL 4" PE CL-6 MAIN EAST OF -

PROPOSED STRUCTURES #5383 & 5387

SEE SP 0208-169 - SHEET 726

CONSTRUCTION PROCEDURES

Install; Clean and Test; and Put in Service; Proposed new main per CenterPoint Energy Construction and Services Manual.

Procedure for tapping or making tie-ins to existing gas mains: Verify existing gas main size, type, and location prior to tapping or making tie-in. Monitor and verify, using a pressure gauge, existing gas main Pressure Class within the bell hole of tap location or tie-in location prior to tapping or making tie-in.

Purge new main until essentially 100% reading is obtained on Combustible Gas Indicator. See CenterPoint Energy Construction and Service Manual Section CS-B-1.230 for purging mains into service.

Complete all Service / Meter Work as directed. (See Service Survey) See Abandonment Procedures for abandonment and purging procedures.

Install a marker ball at a new end of main, at a valve, at each ell of a horizontal offset, at road crossings and at any fitting or pressure control identified as needing to be located in the future. Refer to CenterPoint Energy Construction and Service Manual section CS-B-1.310 for installation procedures.

NOTE: BORE ALL PAVED STREETS AND DRIVEWAYS Minimum depth requirements for crossings of state highways and county roads is 60". Minimum depth requirements for crossings of city streets and township roads is 48". Minimum depth for parallel installations on state highways and county roads is 36". Minimum depth for parallel installations on city streets and township roads is 30". All steel pipe welds

to be coated with 2 part epoxy.

129' NCL WBI

4" TR CL - 6 (38143646) [50 PSIG]

INSTALL: 2" PE CAP TO COVER

END SERVICE # 1430

CSAH 12 (109 AVE NE)

23' ECL

←-w-

When butt fusing to existing in-service polyethylene, visually inspect for the presence of hydrocarbon permeation immediately after removing fusion iron. If any bubbling is identified on the heated surface, do not join to new PE pipe. Allow to cool and cut this end off (12" length) and send to the Golden Valley Lab with street location and W.O. #. Complete tie- in/extension using an electrofusion coupling(s).

Document in field notes.

EXISTING: 2" X 2" HVPT (38143646)

INSTALL: 2" X 2" HVPT

EXTEND: 2" PE CL-6 SOUTH

CUT & ABDN: 2" PE CL-6 SOUTH USE: 2" PE CAP

@132' NCL CSAH 12

@140' NCL CSAH 12

2" PE 90 DEG ELL

@23' ECL BALTIMORE ST NE

@5' WEL BALTIMORE ST NE

CSAH 12 (109 AVE NE)

Pipe ≤ 4-inches Diameter (Unregulated PCB area): Project area cleared for internal impacts. Pipe being removed is unregulated for disposal if coating does not exist or is non-asbestos. Refer to CNP Construction and Service Manual CS-B-1.110, CS-B-1.330, and CS-B-1.100, for pipe to be abandoned.

10930

4" TR CL - 6 (38143646) [50 PSIG]

CORROSION TECH FOR AREA IS ROSS BARKER, CELL 952-322-0383

ABANDONMENT PROCEDURES

See Construction Procedures for installation of mains and services prior to abandonmen

The project includes work on one-way feed mains. Ensure all proposed main is in service, all taps are completed And all services have been transferred to new main prior to abandonments.

Cut and abandon existing main as shown. Purge abandoned mains until essentially 0%gas reading is obtained on Combustible Gas Indicator. See CenterPoint Energy Construction and Services Manual Section CS-B-1.110 and Section CS-B-1.230 for purging mains out of service using air movers.

Cross Compression may be used to lower pressure in line prior to venting trapped gas and purging line out of service. Warning - cross compression into a one-way feed system requires Engineering approval. Trapped gas to be transferred to CL-6 (50) PSIG system. Do not exceed 50 PSIG on the outlet side of the Cross Compression unit. Monitor using

digital gauge on outlet side of unit. Contact Area C&M Personnel prior to starting job to review Cross Compression process and to arrange field support.

For typical connection of Cross Compression: Plastic Mains: Use a 1-1/4" PE Service Tee with a temp. 1-1/4" anodeless riser with valve Steel Mains: Use a 2" TOR Drill Nipple.

Contact Engineering with questions.

CenterPoint.

PROPRIETARY AND CONFIDENTIAL PROJECT #: **117321379**

CITY: BLAINE

COUNTY: ANOKA ----- IN SERVICE PROPOSED

PROPOSED ABANDONED ABANDONED NOT A PART OF PROJECT SEE NOTES

Pipe Summary

433' 2" PE Class 6

456' 4" PE Class 6

889' TOTAL PIPE

Proposed Abandoned Pipe

10' 2" PE Class 6

696' TOTAL PIPE

4" PE Class 6

243' GENERIC PLASTIC OTHER MAIN - 2"

441' GENERIC PLASTIC OTHER MAIN - 4"

EXISTING: 4" TR FULL FLOW TEE (A71882002) @33' WCL DAVENPORT ST @59' SCL CR 12 FOLLOW GFIP 321-2025 FOR PROCEDURES (LOCATION 1)

INSTALL: 4" PE FULL FLOW TEE **@5' EWL UTILITY EASEMENT**

EXTEND: 4" PE CL-6 SOUTH

CUT & ABDN: 4" TR CL-6 SOUTH USE: 4" PE CAP

INTENT IS TO INSTALL 4" PE FULL FLOW TEE WEST OF PROPOSED STRUCTURE #5906 SEE SP 0208-169 - SHEET 733

PIPELINE INTEGRITY PACKET: N STATION MANAGER: N DD NUMBER: N/A CORROSION: ROSS BARKER

SITE CONTACT: STACY KNAPP UTILITY COORDINATOR T2 UTILITY ENGINEERS 612-500-2073

SURVEYOR REQUIRED? Y RETURN PACKET TO ENG? N JOB BRIEFING REQUIRED? Y

EMP: N/A

GFIP #: 321-2025 PERMITS: CITY OF BLAINE

EXISTING: 4" TR FULL FLOW TEE (A71882002) @24' WCL DAVENPORT ST @61' NCL LOT ENTRANCE

@503' SCL 109 AVE NE

FOLLOW GFIP 321-2025 FOR PROCEDURES (LOCATION 2)

- INSTALL: 4" PE 90 DEG ELL @65' NCL LOT ENTRANCE 4" PE 90 DEG ELL @5' EWL DAVENPORT ST

EXTEND: 4" PE CL-6 NORTH

INTENT IS TO INSTALL 4" PE 90 DEG ELL WEST OF PROPOSED STRUCTURES #5900 & 5901 SEE SP 0208-169 - SHEET 733

ANOKA COUNTY PERMIT:


DEPICTS ESTIMATED LOCATION OF HOLES APPROX 5' X 5' DIMENSION, 4' DEPTH

APPROX 3' X 3' DIMENSION, 4' DEPTH

PROJECT DESCRIPTION: SREL CSAH 12 & DAVENPORT ST DESIGNER: JAKE JACOBSON PHONE#: 612-321-4475 DRAWN BY: JAKE JACOBSON DESIGN DATE: 06/25/2025 **REVISION INFO:**

> SCALE: 60':1" SHEET 1 OF 1

DEPICTS ESTIMATED LOCATION OF HOLES SS#: #

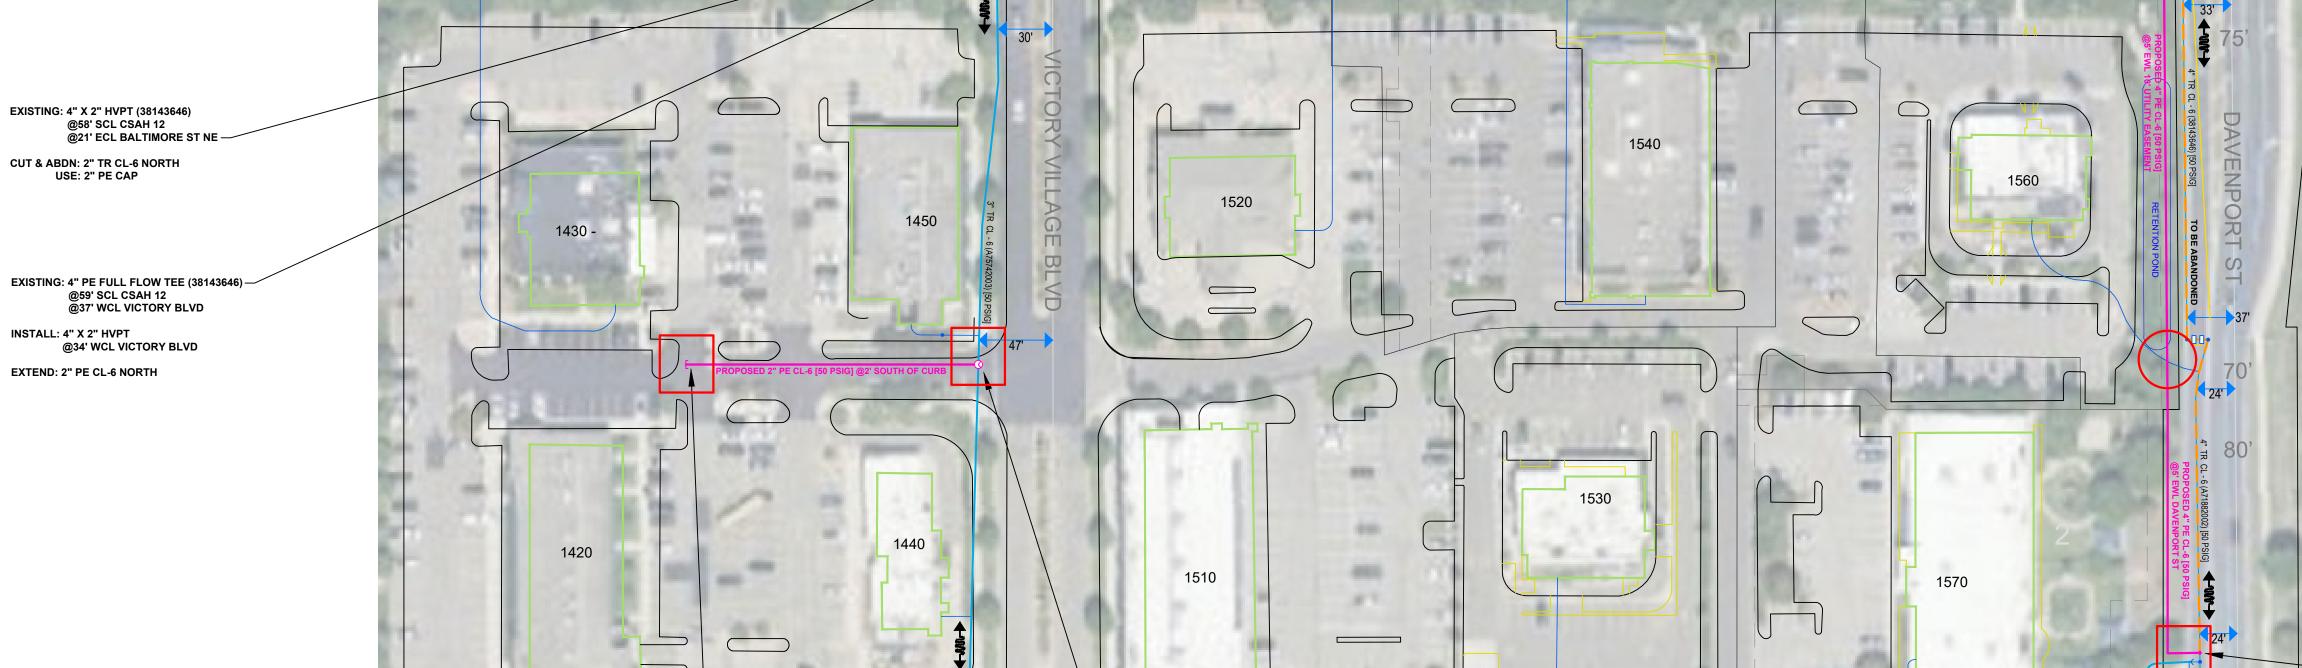

EXISTING: 3" TR CL-6 (A71882002)


@2' SOUTH OF CURB


INSTALL: 3" X 2" HVPT


EXTEND: 2" PE CL-6 WEST


@47' WCL VICTORY VILLAGE BLVD


R CL - 6 (38143646) [50 PSIG]

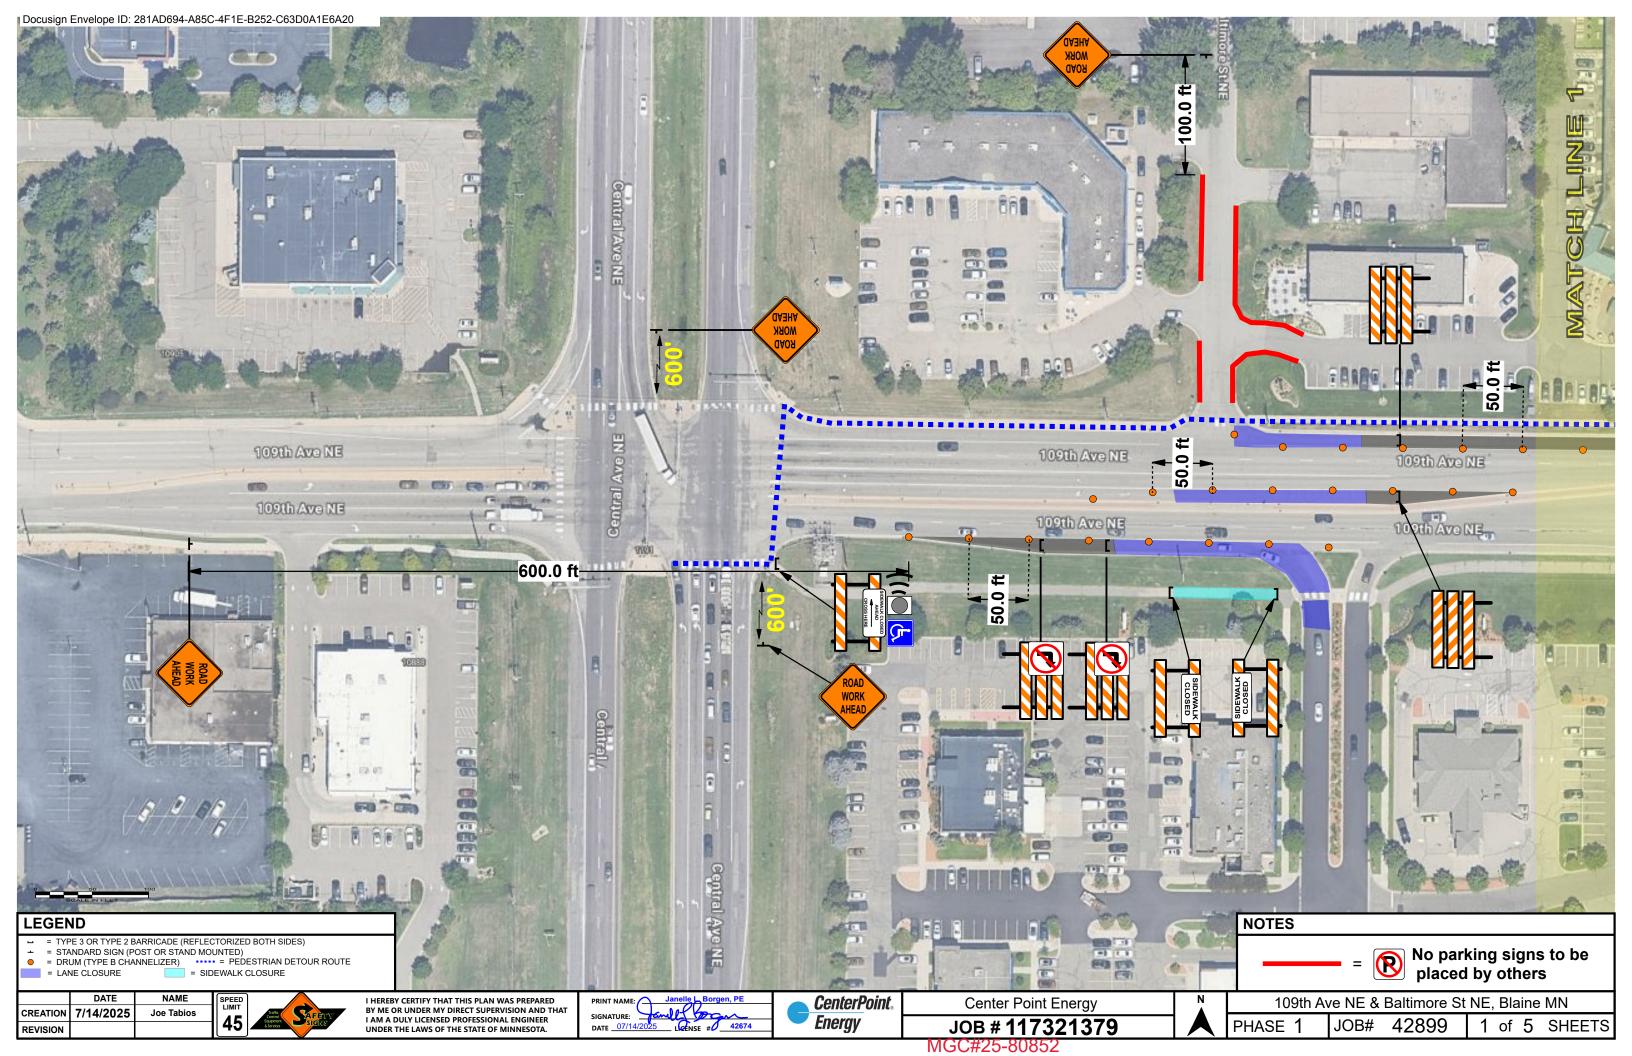


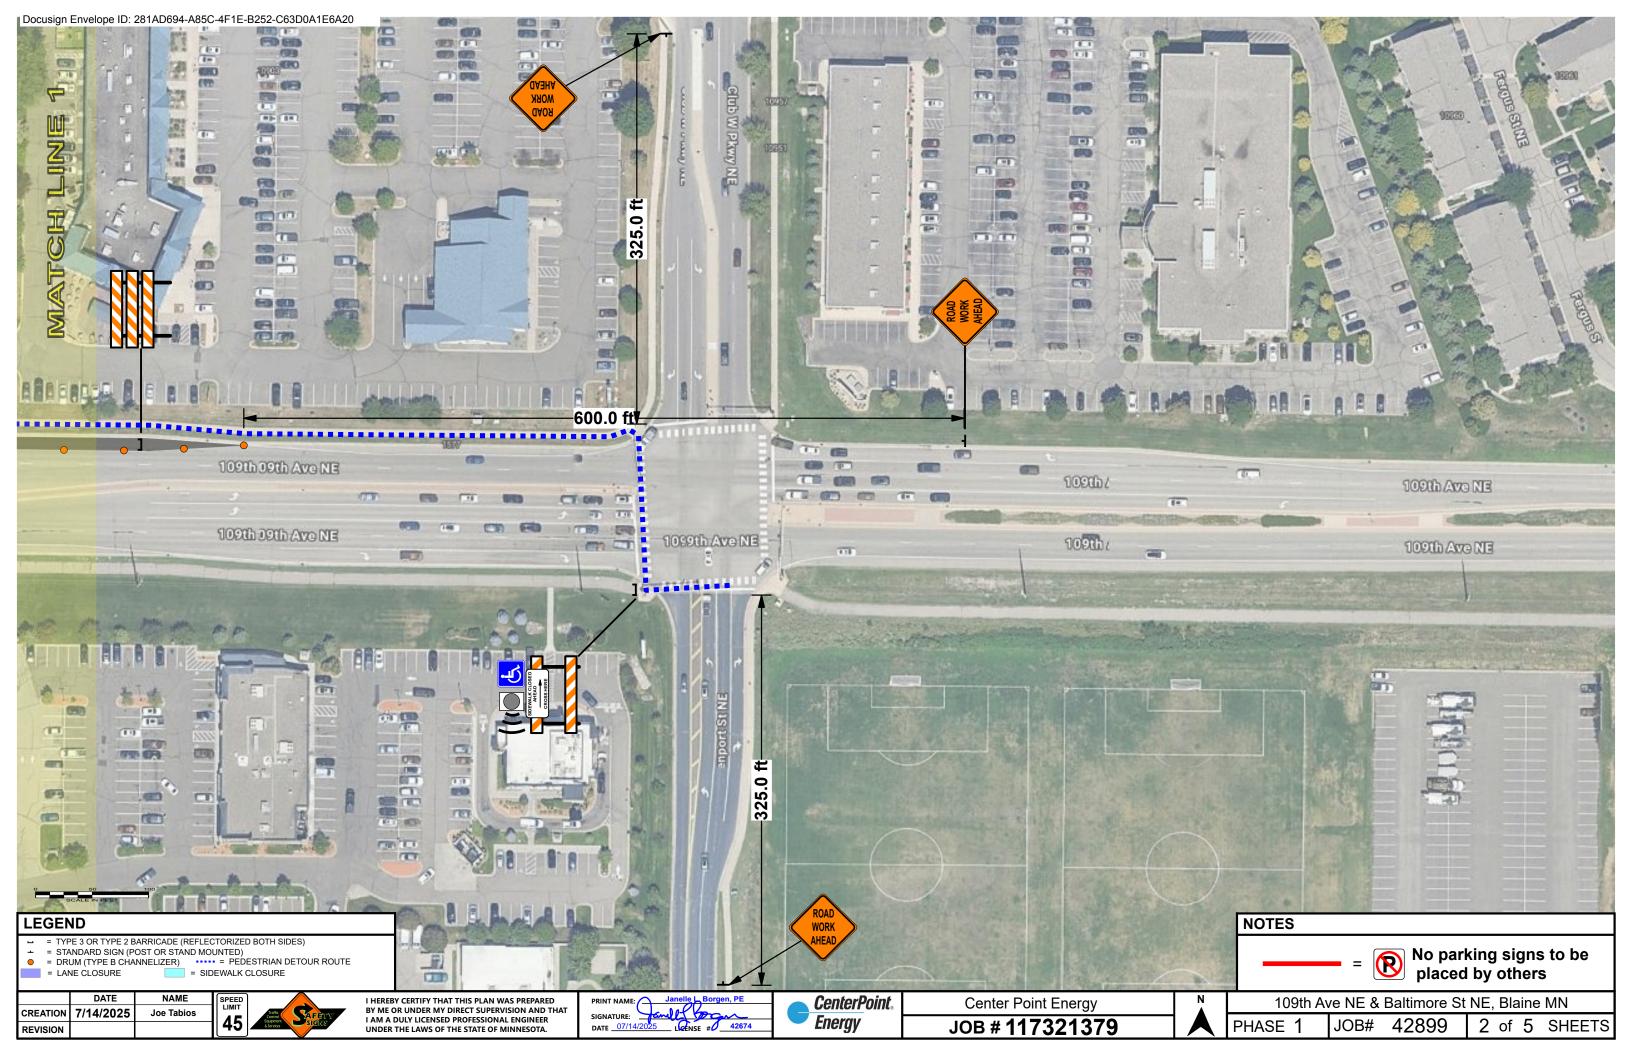


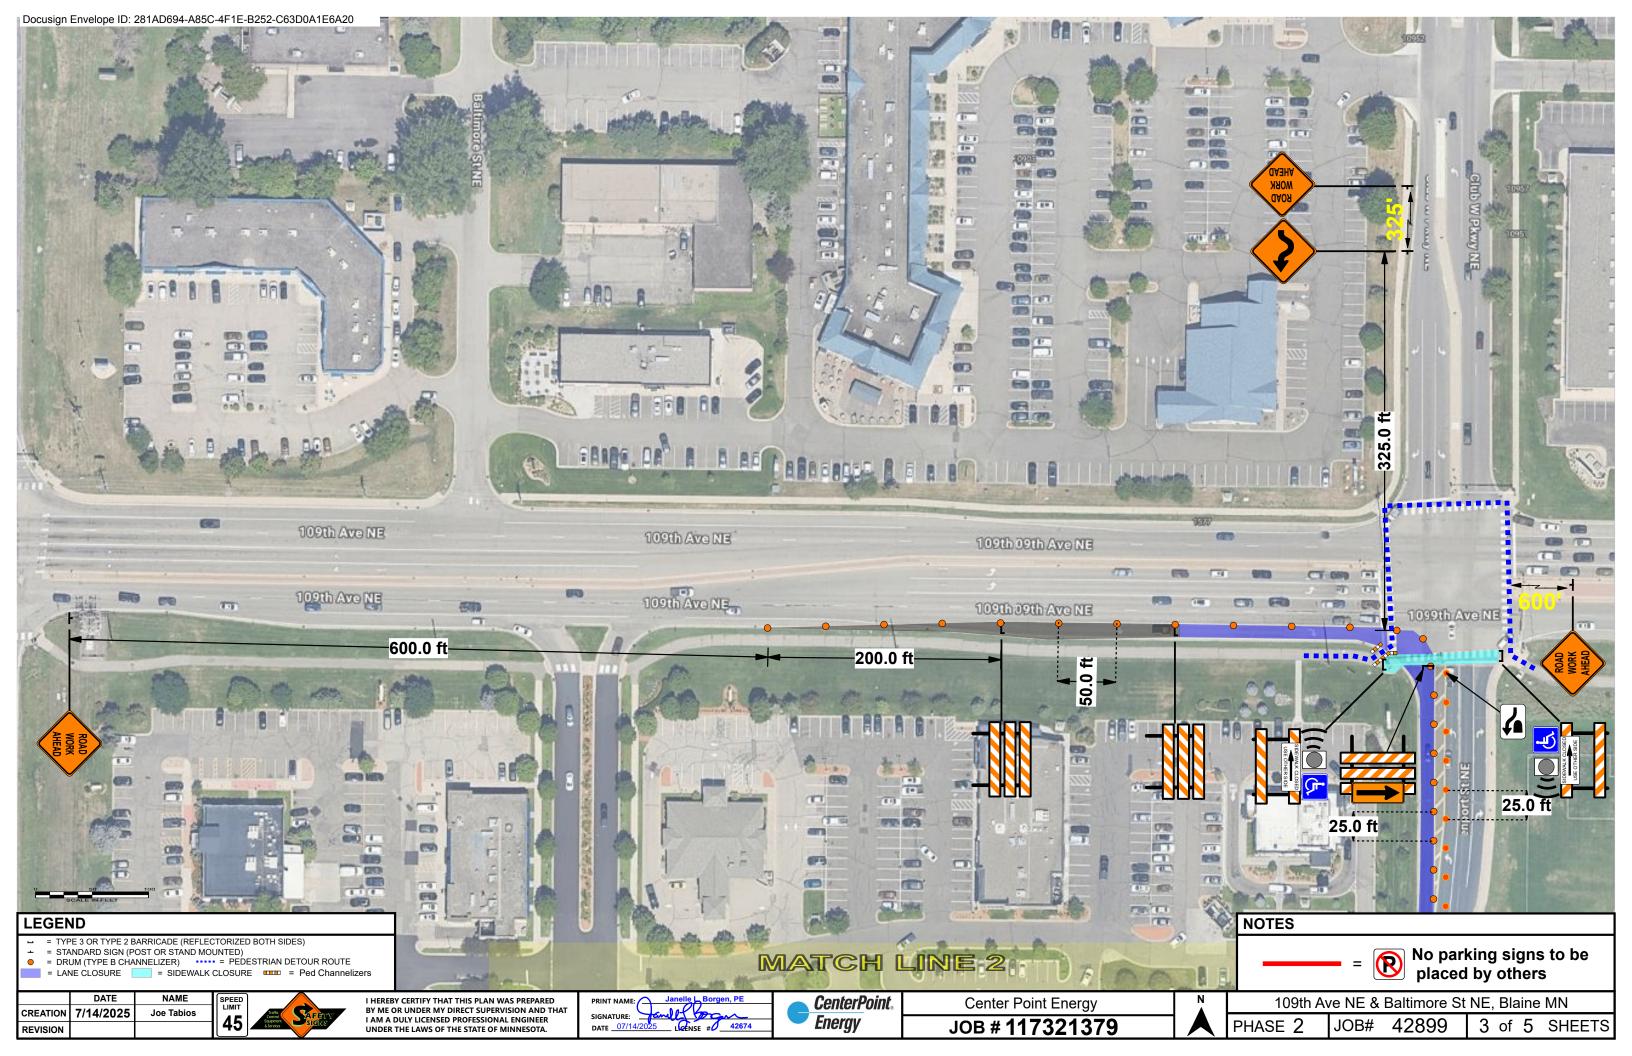


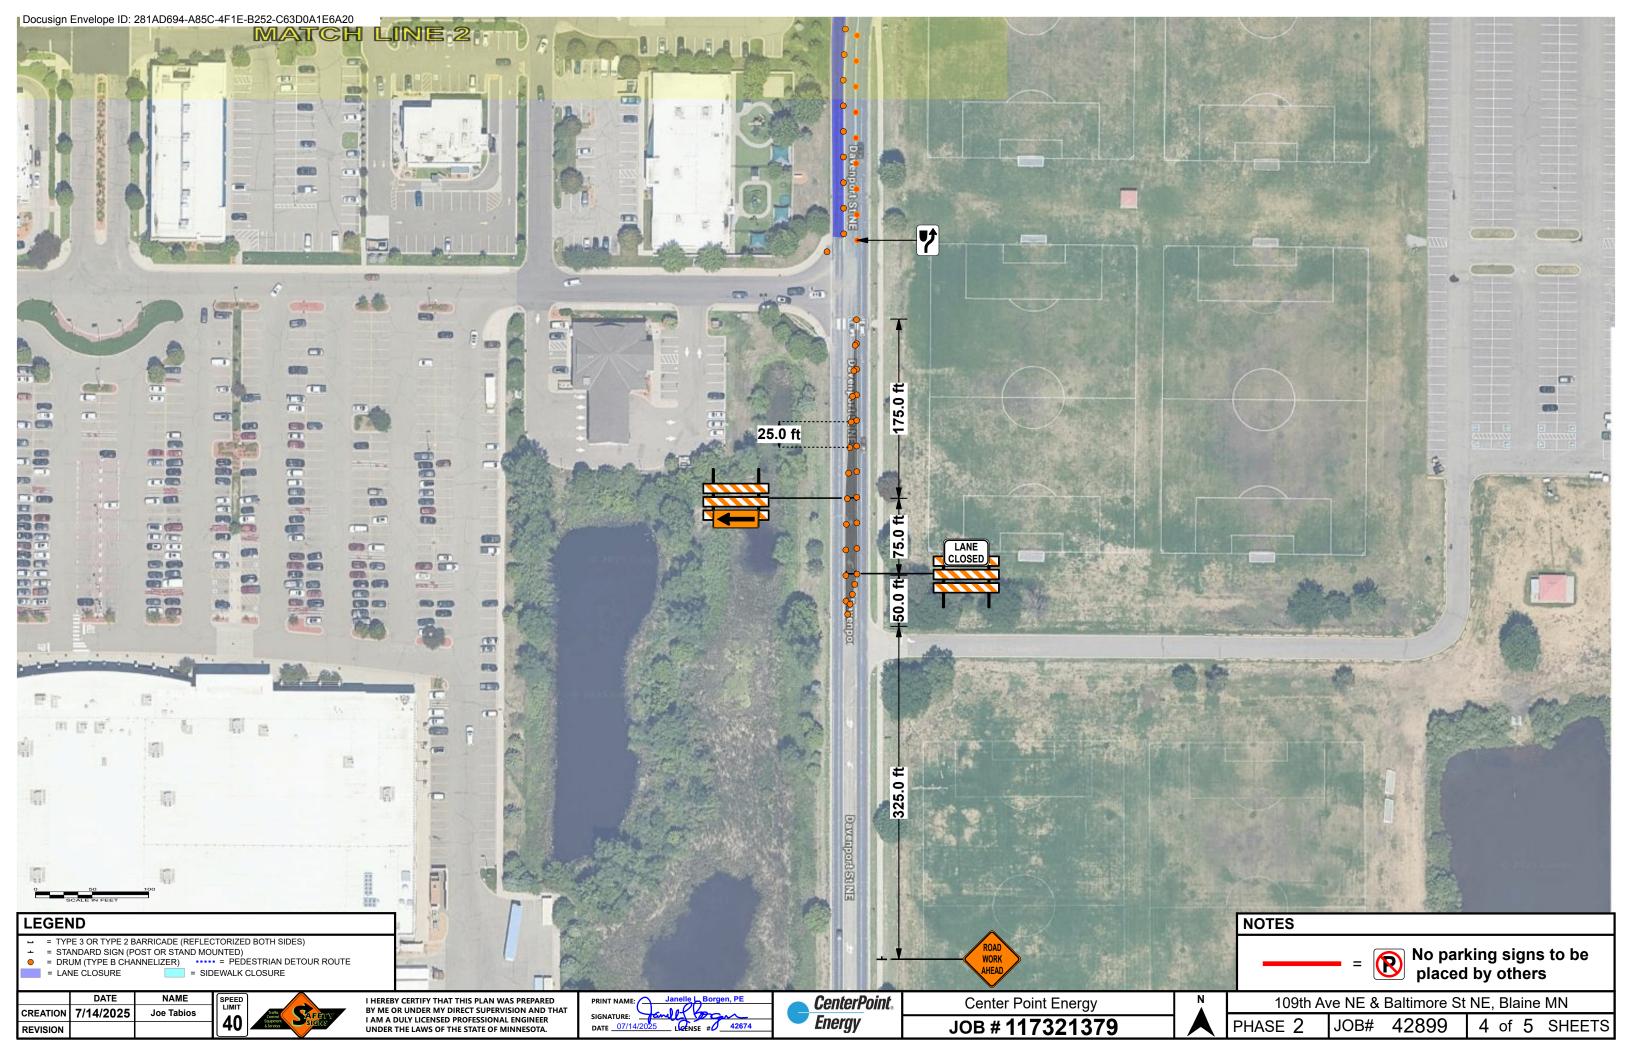

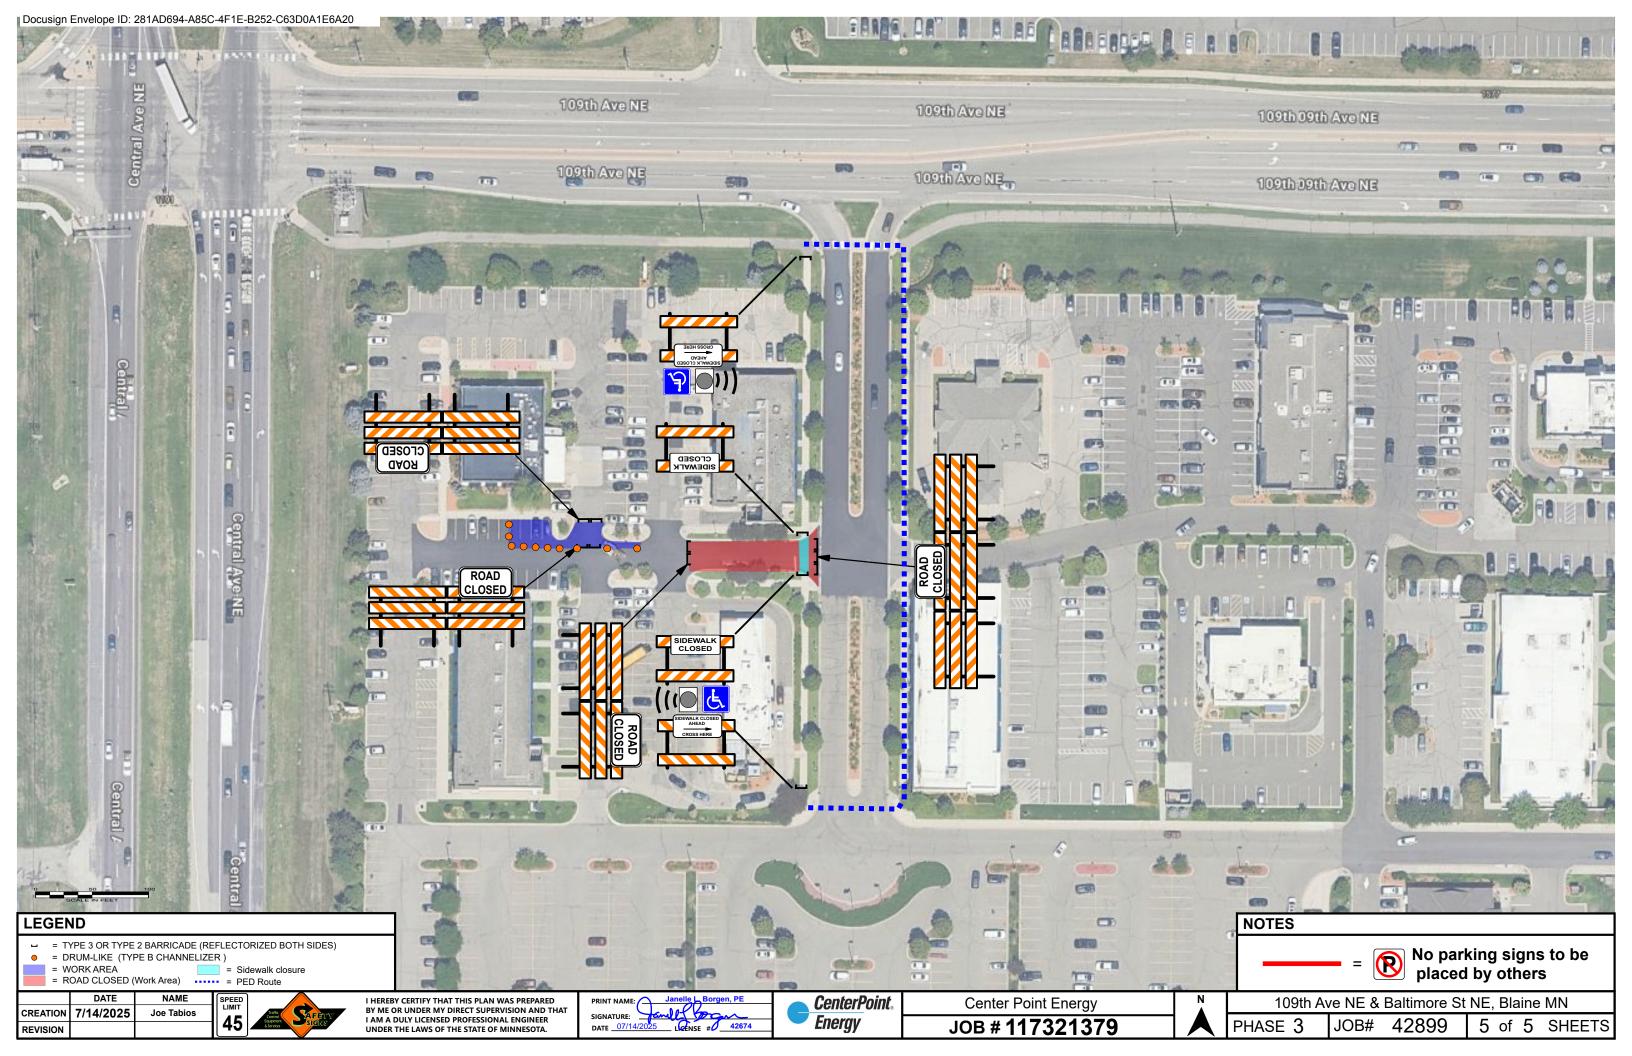

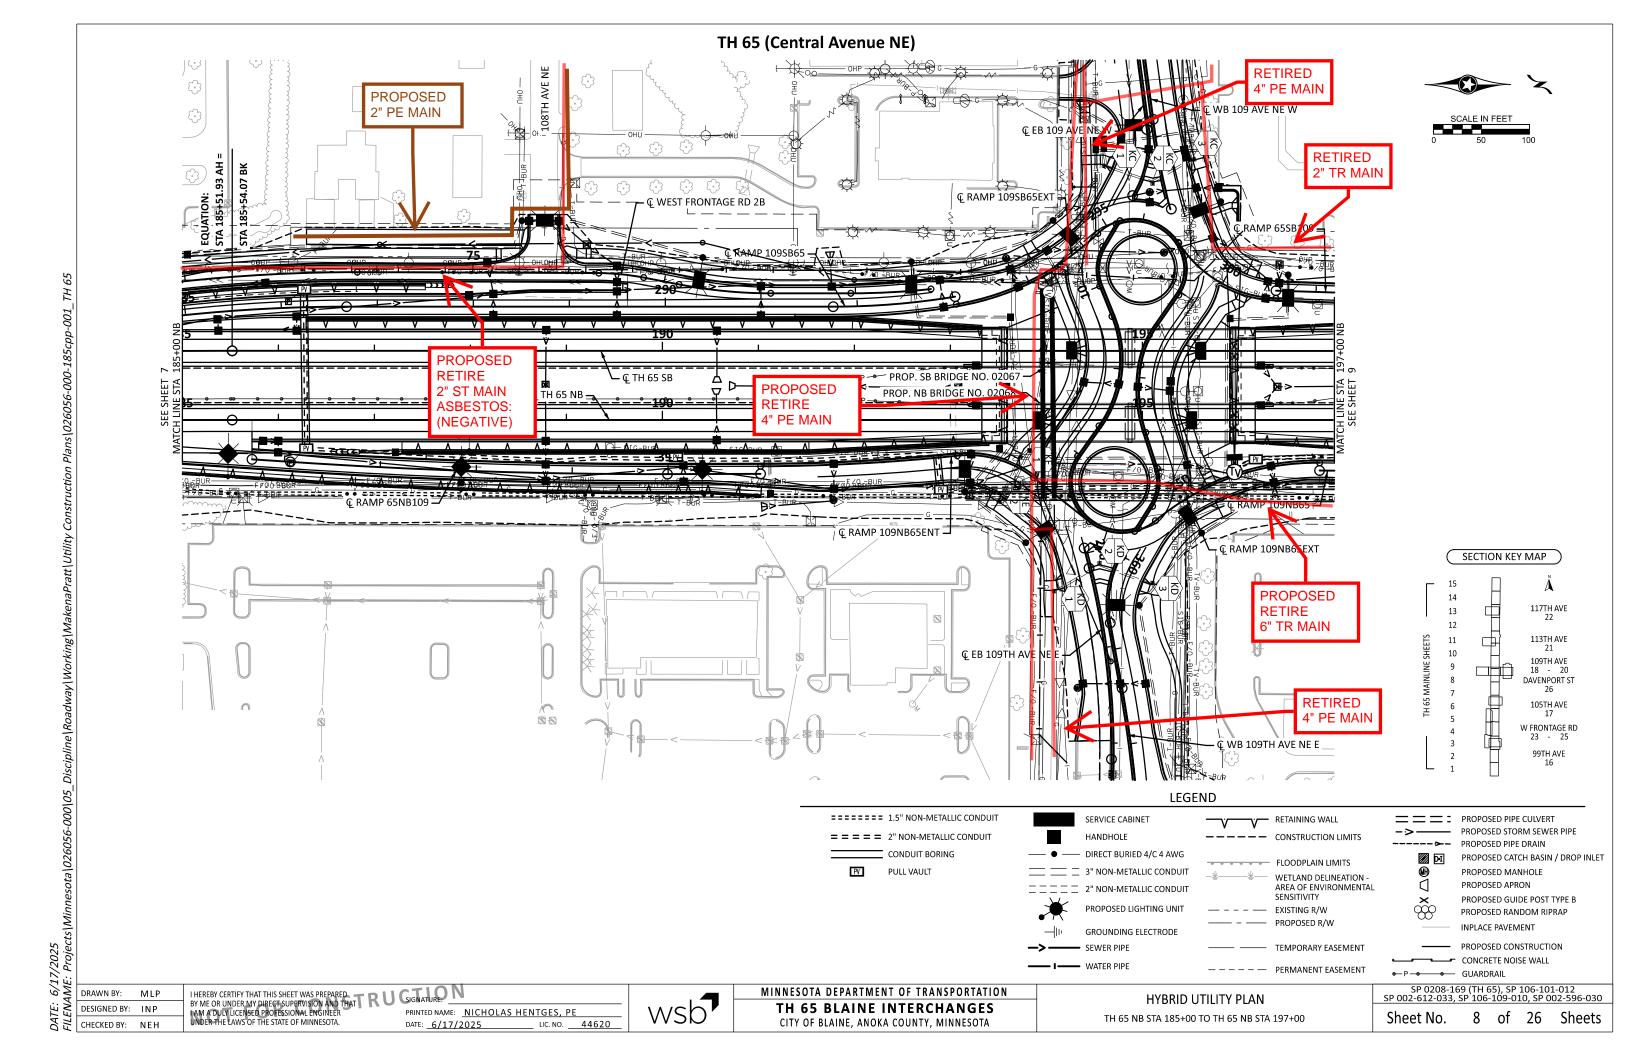

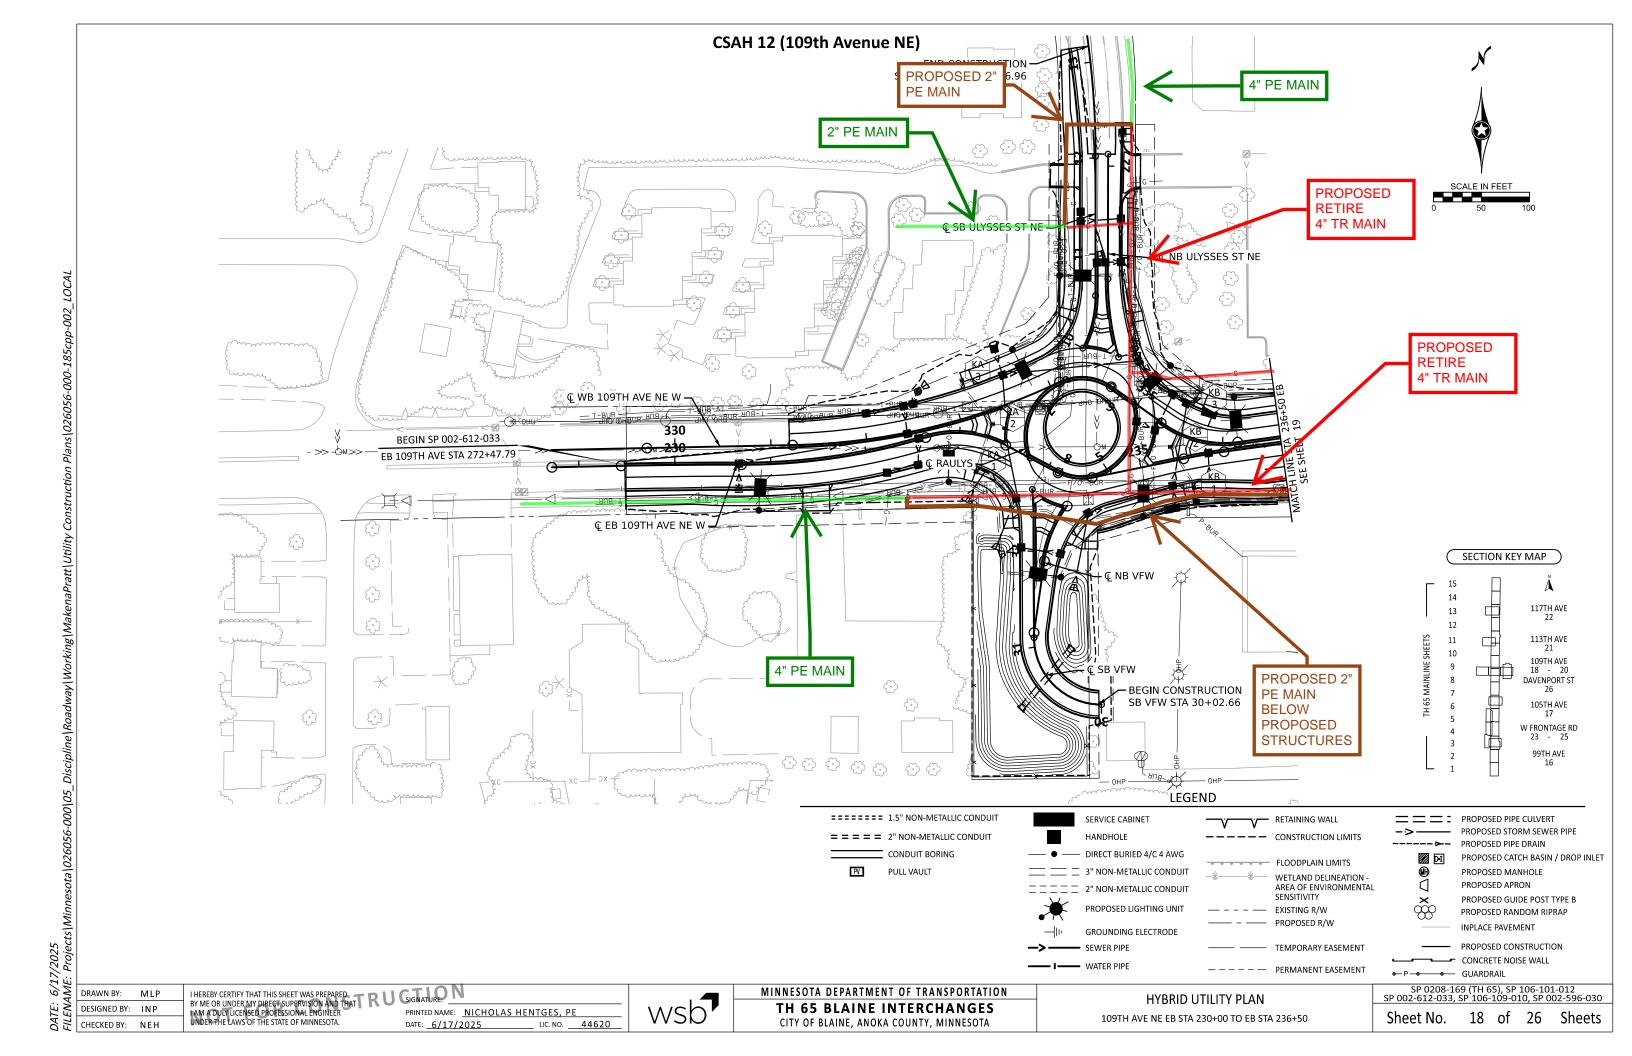

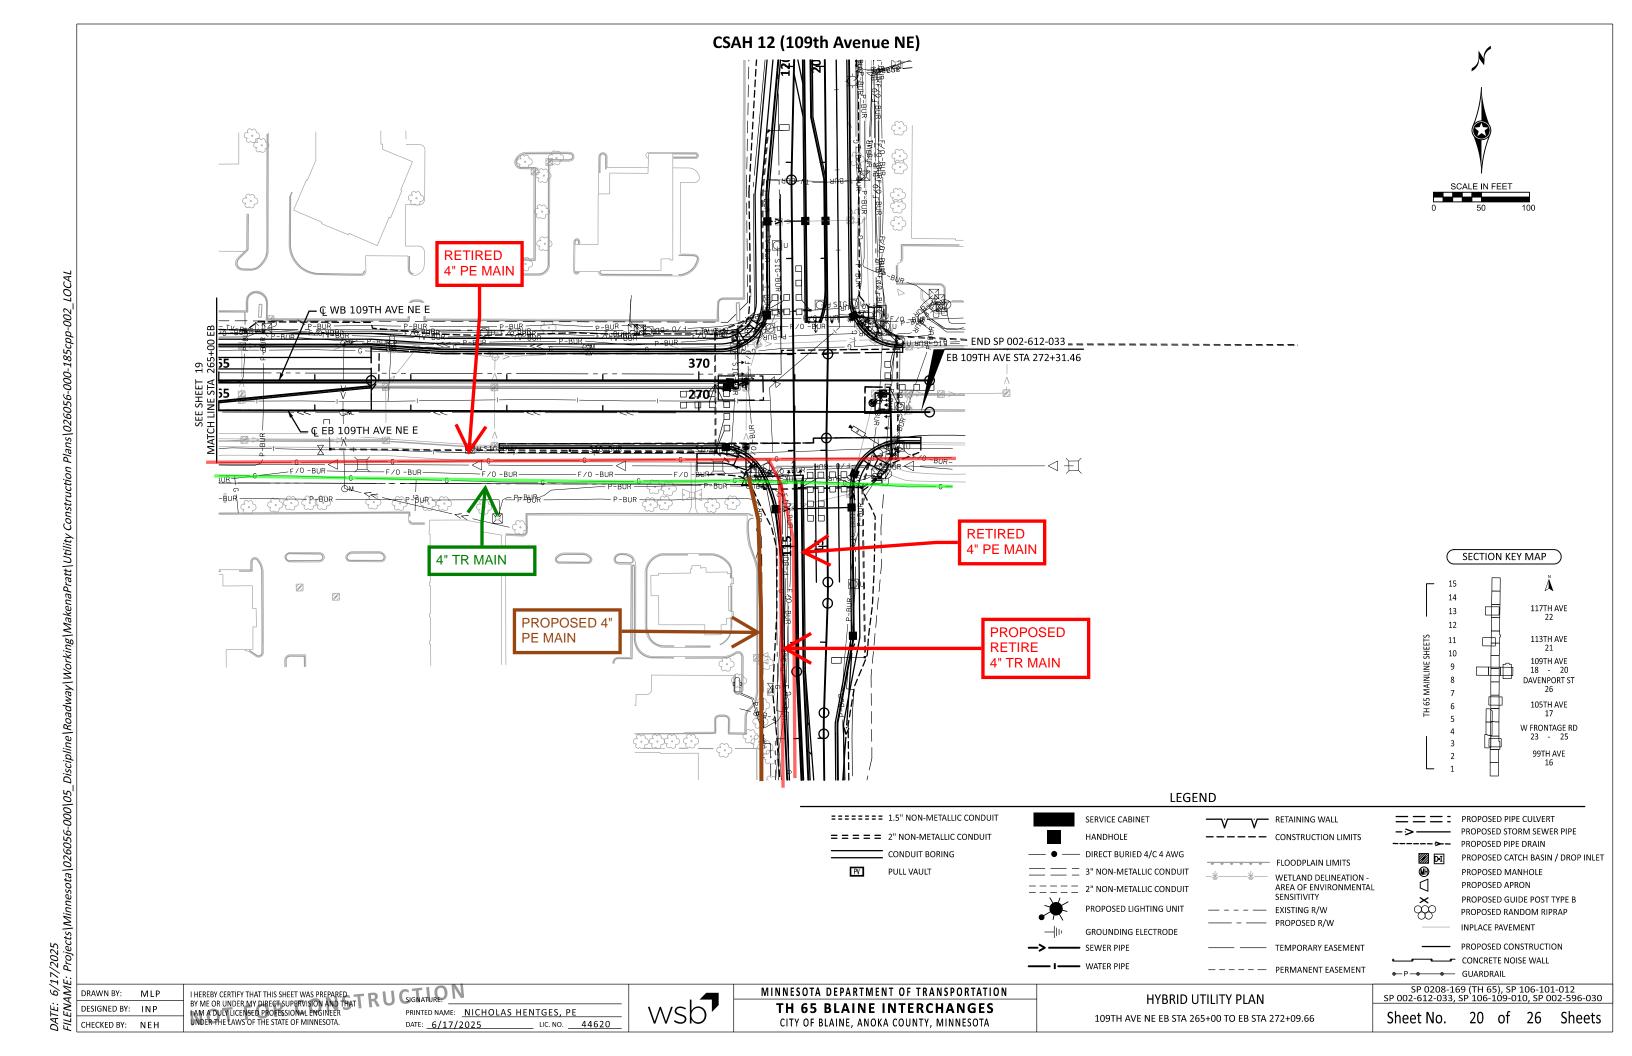



Certificate Of Completion

Envelope Id: 281AD694-A85C-4F1E-B252-C63D0A1E6A20

Subject: Desiree Tienter - ROW Permit Application

Source Envelope:

Document Pages: 11 Signatures: 1 **Envelope Originator:** Initials: 1 Certificate Pages: 4 **Highway Permits**

AutoNav: Enabled

Envelopeld Stamping: Enabled

Time Zone: (UTC-06:00) Central Time (US & Canada)

Status: Sent

Anoka County Government Center

2100 3rd Avenue Anoka, MN 55303

highwaypermits@anokacountymn.gov

IP Address: 158.81.13.145

Record Tracking

Status: Original

8/11/2025 11:40:09 AM

Security Appliance Status: Connected Storage Appliance Status: Connected

Holder: Highway Permits

highwaypermits@anokacountymn.gov

Pool: StateLocal Pool: Anoka County Location: DocuSign

Location: Docusign

Signer Events Desiree Tienter

desiree.tienter@centerpointenergy.com

Security Level: DocuSign.email

> ID: 1 8/11/2025 11:40:11 AM

Signature

DocuSigned by: Desiree tienter DEB32C66BD924B0

Signature Adoption: Pre-selected Style Using IP Address: 158.81.13.145

Timestamp

Sent: 8/11/2025 11:40:10 AM Viewed: 8/11/2025 11:40:17 AM Signed: 8/11/2025 11:42:41 AM

Electronic Record and Signature Disclosure:

Accepted: 10/13/2023 10:54:58 AM

ID: 77113ab1-e2e6-4132-8b6e-db80629ca237

Susan Burgmeier

Susan.Burgmeier@anokacountymn.gov

Associate Traffic Technician

Anoka County

Signing Group: Highway Permits

Security Level: Email, Account Authentication

(Optional)

Electronic Record and Signature Disclosure:

Accepted: 7/28/2025 7:54:59 AM

ID: c16d1b4b-7911-43c9-9382-b38bc1578d7d

Sent: 8/11/2025 11:42:44 AM Viewed: 8/11/2025 2:54:50 PM

In Person Signer Events	Signature	Timestamp
Editor Delivery Events	Status	Timestamp
Agent Delivery Events	Status	Timestamp
Intermediary Delivery Events	Status	Timestamp
Certified Delivery Events	Status	Timestamp
Carbon Copy Events	Status	Timestamp

Desiree Tienter

desiree.tienter@centerpointenergy.com

Security Level: Email, Account Authentication

(Optional)

Electronic Record and Signature Disclosure:

Carbon Copy Events	Status	Timestamp
Not Offered via Docusign		
Witness Events	Signature	Timestamp
Notary Events	Signature	Timestamp
Envelope Summary Events	Status	Timestamps
Envelope Summary Events Envelope Sent	Status Hashed/Encrypted	Timestamps 8/11/2025 11:40:10 AM
•		•
Envelope Sent	Hashed/Encrypted	8/11/2025 11:40:10 AM
Envelope Sent Envelope Updated	Hashed/Encrypted Security Checked	8/11/2025 11:40:10 AM 8/11/2025 11:42:42 AM

ELECTRONIC RECORD AND SIGNATURE DISCLOSURE

The following information constitutes Anoka County's (we, us or Company) written notices or disclosures relating to your use of DocuSign in relation to Anoka County's license. Described below are the terms and conditions for providing notices and disclosures electronically through the DocuSign system. Please read the information below carefully and thoroughly, and if you agree to this Electronic Record and Signature Disclosure (ERSD), please confirm your agreement by selecting the check-box next to 'I agree to use electronic records and signatures' before clicking 'CONTINUE' within the DocuSign system.

Getting paper copies

At any time, you may request from us a paper copy of any record provided or made available electronically to you by us. You will have the ability to download and print documents we send to you through the DocuSign system during and immediately after the signing session and, if you elect to create a DocuSign account, you may access the documents for a limited period of time (30 days) after the documents are first sent to you. At any time, if you request paper copies of any documents, you may be charged a fee. You may request paper copies from us by following the procedure described below.

Withdrawing your consent

If you decide to receive notices, disclosures and documents from us electronically, you may change your mind and tell us that going forward you want to receive documents only in paper format. Please note, processing time will be slowed down dramatically as we will be required to print and send the document through the mail and await your return of the documents. The process to change the method of receipt is described below.

All notices and disclosures will be sent to you electronically

Upon your acceptance to receive electronic notifications, all required notices, disclosures, authorizations, acknowledgements, and other documents that are required to be provided or made available to you during the course of our relationship with you will be provided electronically through the DocuSign system. All of the required documents will be provided to you at the address that you have given us.

How to contact Anoka County:

You may change your preferred method of contact whether electronically, or paper copies, or change your email address. You may also request paper copies of certain information from us, or withdraw your prior consent to receive documents. Please use the contact information below for your request and in the body of your correspondence, identify your desired action. If you are

changing an email address, please include your prior email address as well as your new address. If you no longer wish to receive future documents in electronic format, please include that request in the body of your email.

Email: helpdesk@co.anoka.mn.us

Phone: (763)-324-4110

Address: Anoka County Government Center

Attn: Information Technology, #300

2100 3rd Avenue Anoka, MN 55303

Required hardware and software

The minimum system requirements for using the DocuSign system may change over time. The current system requirements are found here: https://support.docusign.com/guides/signer-guide-signing-system-requirements.

ACKNOWLEDGEMENT

To confirm your access to the electronic notices and disclosures, which will be similar to other electronic notices and disclosures that we may provide to you, please acknowledge that you have read this ERSD by selecting the check-box next to 'I agree to use electronic records and signatures' before clicking 'CONTINUE' within the DocuSign system.

By selecting the check-box next to 'I agree to use electronic records and signatures', you confirm that:

- You can access and read this Electronic Record and Signature Disclosure; and
- You can print this Electronic Record and Signature Disclosure, or save or send this
 Electronic Record and Disclosure to a location where you can print it, for future reference
 and access; and
- Until or unless you notify Anoka County as described above, you consent to receive
 exclusively through electronic means all notices, disclosures, authorizations,
 acknowledgements, and other documents that are required to be provided or made
 available to you by Anoka County during the course of your relationship with Anoka
 County.