Docusign Envelope ID: 52D3C1DA-EF2A-43B8-A2D8-2EE43FDB1B05

Anoka County MINNESOTA

ANOKA COUNTY TRANSPORTATION DIVISION

1440 BUNKER LAKE BLVD NW ANDOVER, MN 55304

763-324-3176

highwaypermits@anokacountymn.gov

NOT VALID UNLESS SIGNED BY ANOKA COUNTY **PERMIT NUMBER**

25-559

RIGHT OF WAY X

COMMERCIAL ACCESS X

CR 15

APPLICATION FOR PERMIT FOR INSTALLATION OF UTILITIES OR PLACING OBSTRUCTIONS ON THE COUNTY HIGHWAY SYSTEM ALL APPLICANTS MUST BE REGISTERED PRIOR TO PERMIT APPROVAL

CONTACT PERSON STEVE STRANDLUND APPLICANT NAME DIRTWORKS INC

ADDRESS PO BOX 169 CITY CEDAR

PHONE NUMBER 612-221-4476 EMAIL STEVESR@DIRTWORKSMN.COM

COMPANY OR INDIVIDUAL PERFORMING WORK DIRTWORKS INC

CONTACT PERSON STEVE STRANDLUND EMAIL STEVESR@DIRTWORKSMN.COM

PHONE NUMBER 6122214476

PERMIT WORK TO START 08/14/2025

Replacing expired permit 24-447.

PERMIT WORK TO BE COMPLETED 10/15/2025

DURATION OF JOB 4 MONTHS APPROX

ARE YOU BEING ASKED TO RELOCATE DUE TO A COUNTY PROJECT? No

ANOKA COUNTY PROJECT NUMBER

WORK SITE ADDRESS WEST SIDE OF EAST BETHEL BLVD NE & 198TH AVE NE **CITY East Bethel**

METHOD OF INSTALLATION/CONSTRUCTION STRIP TOPSOIL, GRADE TO PROPOSED SUBGRADE, PLACE CLV, PAVE

NATURE OF WORK INSTALL NEW TURN LANE TO TIE INTO THE NEW ACCESS ROAD FOR HIDDEN PRAIRIE **DEVEOLPMENT BY TH CONSTRUCTION**

Per approved plans on file at ACHD.

IF THE ROADWAY IS ENCROACHED, YOU MUST ATTACH A TRAFFIC CONTROL PLAN SURFACE TO BE DISTURBED SITE PLAN

X DITCH/BLVD

GRAVEL

AND/OR REFERENCE THE MOST CURRENT VERSION OF THE MN TEMPORARY TRAFFIC CONTROL FIELD MANUAL (3+ DAYS REQUIRES PLANS TO BE SIGNED BY A LICENSED PE).

BITUMINOUS

CONCRETE

SIGNED TRAFFIC CONTROL PLAN ATTACHED. TRAFFIC CONTROL SIGNAGE IS ONSITE NOW TC signage shall be turned away or layed down when no work is occurring.

IS SIGNING AND STRIPING REQUIRED? NO **NONE**

DEPTH FROM SURFACE (60" minimum under county roads)

REFER TO GRADING PLAN

SIZE AND KIND OF PIPE/CABLE

NUMBER OF EXCAVATIONS 0

SIZE OF EXCAVATIONS REFER TO GRADING PLAN (Length, width, and depth)

LOCATION OF EXCAVATIONS ALL EXCAVATIONS ARE TO BE PROTECTED AT ALL TIMES AND THEN BACKFILLED WHEN UNATTENDED AND/OR OVERNIGHT Specific written descriptions of excavations - if shown on attached drawing, drawing shall be specific with depth and distance from centerline, curb, or other distinguishable location. Traffic control plans cannot be approved without specific excavation descriptions.

REFER TO ATTACHED PLAN

Per approved plan on file at ACHD.

THIS PERMIT COVERS THE RIGHT OF WAY IN ANOKA COUNTY ONLY

Docusign Envelope ID: 52D3C1DA-EF2A-43B8-A2D8-2EE43FDB1B05



ANOKA COUNTY TRANSPORTATION DIVISION 1440 BUNKER LAKE BLVD NW ANDOVER, MN 55304

PERMIT PHONE: 763-324-3176

GENERAL INFORMATION

highwaypermits@anokacountymn.gov

One permit must be approved for each county road on which work will be performed prior to any work within the right of way by any utility/contractor. Emergency conditions which threaten the safety of the public and require immediate repair are exceptions to this rule. Under those circumstances, the utility/contractor is permitted to begin and/or complete the necessary repairs. The Anoka County Transportation Division (ACTD) shall be notified of emergency repairs as soon as feasible and a written permit is to be completed within two business days of occurrence.

A license-permit bond is generally required of the contractor as part of the registration process, the amount of which will be determined by the nature of the utility work.

A sketch or drawing shall accompany each permit application which will show the location of the proposed work/utility with reference to the county highway center line and right of way line. A complete set of plans is required for all sewer/water projects.

It shall be the responsibility of the applicant to determine which of the special conditions apply to each permit.

ACTD reserves the right to revoke any utility permit and halt work, if, upon inspection of any job site, the special conditions are not met, and/or a hazard exists for the applicant or public safety is threatened. The failure to comply with the terms and conditions of any applicable Federal, State, Regional, and local laws, rules and regulations, including any provision of Anoka County's Right-of-Way Ordinance shall be cause for immediate revocation of a permit.

The applicant shall notify ACTD immediately upon completion of project so that the ACTD can inspect the site to determine if restoration has been satisfactorily completed.

The undersigned hereby accepts the terms and conditions of this permit and the regulations of Anoka County, and agrees to fully comply therewith to the satisfaction of the ACTD. The county of Anoka, its officials, employees, and agents, shall be held harmless, by the applicant/permittee, from any demands, claims, lawsuits, or damages relating to the work described in this permit.

APPLICANT'S SIGNATURE

DocuSigned by: Steve Strandlund

DATE

8/12/2025

AUTHORIZATION OF PERMIT

In consideration of the applicant's agreement to comply in all respects with the regulations of the ACTD covering such operations, permission is hereby granted for the work to be done as described in the above application. Said work to be done in accordance with the general conditions listed above and the special conditions required as hereby stated. It is expressly understood that this permit is conditioned upon replacement or restoration of the county highway and its right of way to their original or to a satisfactory condition. It is further understood that this permit is issued subject to the approval of local city or township authorities having joint supervision over said street or highway.

APPROVED BY:

DATE

8/13/2025

TITLE: Traffic Technician

Susan Burgmeier

NOT VALID UNLESS SIGNED BY ANOKA COUNTY



ANOKA COUNTY TRANSPORTATION DIVISION

1440 BUNKER LAKE BLVD NW

ANDOVER, MN 55304 PERMIT PHONE: 763-324-3176

highwaypermits@anokacountymn.gov

SPECIAL CONDITIONS

TRAFFIC CONTROL

- 1) Detours
 - a) Detailed detour layouts shall be submitted to the traffic engineer for approval.
 - b) No detours shall be permitted without prior approval of the Anoka county traffic engineer.
 - c) A ten day notice must be given prior to the installation of any detour.
 - d) It shall be the responsibility of the applicant to notify Anoka county central communications, local government bodies, and any affected bus companies ten days prior to any road closures/detours.
 - e) Immediately upon completion of work and/or detours, all posts, barricades, and signs shall be removed from the right of way.
- 2) Traffic control devices
 - a) All traffic control devices, barricades, flashers, etc., shall be furnished by the applicant and shall be in accordance with the most recent edition of the Minnesota manual on uniform traffic control devices and temporary traffic control zone layouts – field manual of the same manual.

CONSTRUCTION REQUIREMENTS

- 1) Open cutting of bituminous or concrete surfaced roads will be allowed only at the discretion of the county engineer.
- 2) Neither supplies nor excavation materials shall be placed on the bituminous or concrete surface at any time.
- 3) No trenches will be allowed to remain open overnight.
- 4) Materials removed from the trench shall be used as backfill insofar as they are suitable. All backfill material shall conform to MNDOT specifications for compaction. The use of heavy equipment on top of trench, slapping with backhoe bucket and/or back casting to achieve compaction is prohibited. Any additional material required to back fill to the original grade shall be furnished by the applicant at no expense to the ACTD. All the base and surface courses damaged during construction operations shall be restored to a condition equal to or better than before operations began. The applicant shall be responsible for and restore any settlement
- 5) All culverts, ditches, shoulders, and backslopes shall be restored to their original condition unless otherwise directed by the ACTD. Shoulders which have been previously constructed or reconstructed with special materials shall be replaced in kind. Restoration of signs, guardrails, guard posts, etc., are the sole responsibility of the applicant and shall be restored to their original condition.
- 6) All roadway maintenance required within the limits of the utility project that is related to the applicant's activities shall be the sole responsibility of the applicant for one year after completion of the project. Upon completion of the restoration work, the applicant shall request a final inspection by the ACTD. The ACTD's approved completion date shall be the starting date of the applicant's one-year responsibility.

HORIZONTAL BORING AND JACKING

- 1) All hard surface roadways shall be jacked or bored.
- 2) All crossings of Anoka County maintained roadbeds, shall be made by boring inside a casing or carrier pipe, or by jacking unless otherwise directed by the Anoka County Engineer. The auger shall lead the casing or carrier pipe by at least six inches whenever possible and never lead the carrier pipe by more than one inch.
- 3) The use of pneumatic devices to facilitate the roadbed crossings will be allowed in most cases with prior approval. In the event approval is not granted and applicant uses a pneumatic device to cross a roadbed and encounters an obstruction and/or unstable subbase material which makes forward or reverse motion of pneumatic device impossible, said pneumatic device then becomes part of the roadway subbase and permission to excavate to retrieve device will not be granted.
- 4) If a pneumatic device is used for the work permitted herein, the installation must be kept to a minimum of four feet below the surface of the roadway if the pneumatic device is less than two inches in diameter, and a minimum of five feet below the surface of the roadway if the pneumatic device is two inches in diameter or larger.

BITUMINOUS RESTORATION

- 1) The locations and dimensions of all openings to be made in the bituminous surface shall be approved by the ACTD prior to any cutting or any surface opening operations.
- 2) All openings in bituminous surfaces shall be cut in a straight line with the sides smooth and vertical. No ragged edges will be permitted. Cutting shall be done with a concrete saw.
- 3) All necessary dust control operations shall be carried out by the applicant at no expense to Anoka County.
- 4) The minimum requirement for subgrade replacement shall be the upper twelve inches of material and shall meet MNDOT specifications for class five placed in six inch layers compacted to one hundred percent of optimum density.
- 5) All manhole casings, gate valves, and other utility structures shall be set one quarter inch below the top of the finished surface.
- 6) Bituminous tack coat materials and application thereof shall conform to MNDOT specification 2357.
- 7) All bituminous surfacing shall be replaced as soon as practicable after the base construction. All bituminous surfacing shall be machine laid. Any exceptions must be approved by the ACTD. Bituminous surfacing shall be replaced to original pavement depth or to a minimum of six inches of bituminous mixture (2360), whichever is greater. Bituminous mixtures must be placed in lifts not exceeding three inches in thickness for base and binder courses and not exceeding two inches for the wear course.
- 8) All surface restoration regardless of size shall conform to existing grades.
- 9) Any unnecessary or negligent damage to bituminous surface in conjunction with the installation and/or repair of a utility shall be cut out and replaced in kind as directed by the ACTD.



ANOKA COUNTY TRANSPORTATION DIVISION

1440 BUNKER LAKE BLVD NW ANDOVER, MN 55304

PERMIT PHONE: 763-324-3176

highwaypermits@anokacountymn.gov

CONCRETE RESTORATION

1) Curb and gutter, sidewalks, and driveways shall be restored in accordance with MNDOT specifications 2531 and 2521.

UTILITY LINES

- 1) There shall be only a single pole line on the county right of way on either side of the center line thereof.
- 2) Exact locations of longitudinal installations on county highways shall be located as directed by the ACTD.

SECTION CORNER MONUMENTS


- 1) Utility locations shall not interfere with the location of any section, quarter, witness, or right of way monuments. For assistance in locations, contact the Anoka County Surveyor's Office.
- The applicant shall be responsible for replacement of any existing property irons disturbed during construction.
- 3) The applicant shall notify the Anoka County Surveyor's Office three working days in advance of any anticipated disturbance of any section, quarter, witness, or right of way monuments.
- 4) Any monument disturbed during the course of construction, shall be reset by the Anoka County Surveyor's Office at the expense of the applicant.


ATTACHING TO BRIDGES/STRUCTURES

 No utility is permitted to be hung from, or otherwise attached to, any bridge or structure without having detailed plans approved by the Anoka County Engineer. These plans are to show approaches to the structure, method of installation, type, and dimension of housing for the utility.

ADDITIONAL PROVISIONS

- 1) All subcontractors, installers, and crew shall possess a physical or electronic copy of all documents in relation to the approved permit prior to the commencement of work and be kept on site. This includes, but it not limited to the following:
 - a) Approved permit
 - b) Any/all traffic control plans and/or layouts
- 2) Shall notify Anoka County Permits at 763-324-3176 or highwaypermits@anokacountymn.gov
 - a) At least 36 hours prior to the commencement of work
 - b) With time frame of proposed of work
 - c) Anticipated traffic control
 - d) When work is complete including restorations to request a final inspection
- 3) No work during inclement weather or when plows are out in any capacity
- 4) All traffic control shall be in accordance with the most current version of the MnDOT Temporary Traffic Control Field Manual
- 5) For staking of right-of way or proposed infrastructure, contact Chris Osterhus at 763-324-3189 a minimum of 48 hours prior to the commencement of work.





Need dates for:

Erosion Control –

Subgrade -

Class 5 -

Base Lift -

Final Wear -

Striping -

Permanent Signing -

Contact Andrea for spotting for striping.

HIDDEN PRAIRIE

TITLE SHEET, LEGEND & NOTES

EAST BETHEL, MINNESOTA

BLOCK

12

GENERAL NOTES

- 1. THE INFORMATION SHOWN ON THESE DRAWINGS CONCERNING TYPE AND LOCATION OF EXISTING UTILITIES IS NOT GUARANTEED TO BE ACCURATE OR ALL INCLUSIVE. THE CONTRACTOR IS RESPONSIBLE FOR MAKING HIS OWN DETERMINATION AS TO TYPE AND LOCATION OF UTILITIES AS NECESSARY TO AVOID DAMAGE TO THESE UTILITIES.
- 2. CALL "811" FOR EXISTING UTILITIES LOCATIONS PRIOR TO ANY EXCAVATIONS.
- 3. THE CONTRACTOR SHALL FIELD VERIFY SIZE, ELEVATION, AND LOCATION OF EXISTING UTILITIES AND NOTIFY ENGINEER OF ANY DISCREPANCIES PRIOR TO THE START OF INSTALLATIONS.
- 4. INSTALLATIONS SHALL CONFORM TO THE CITY STANDARD SPECIFICATIONS AND DETAIL PLATES (MOST CURRENT EDITION) AND MNDOT STANDARD SPECIFICATIONS FOR CONSTRUCTION (MOST CURRENT EDITION).
- 5. STORAGE OF MATERIALS OR EQUIPMENT SHALL NOT BE ALLOWED ON PUBLIC STREETS OR WITHIN PUBLIC RIGHT-OF-WAY.
- 6. NOTIFY CITY OF EAST BETHEL A MINIMUM OF 48 HOURS PRIOR TO THE COMMENCEMENT OF CONSTRUCTION.
- 8. ALL ELECTRIC, TELEPHONE, AND GAS EXTENSIONS INCLUDING SERVICE LINES SHALL BE CONSTRUCTED TO THE APPROPRIATE UTILITY COMPANY SPECIFICATIONS. ALL UTILITY DISCONNECTIONS SHALL BE COORDINATED WITH THE APPROPRIATE UTILITY COMPANY.

STORM SEWER NOTES

- 1. PROPOSED STORM SEWER PIPE SHALL BE:
- 1.1. REINFORCED CONCRETE PIPE (RCP) WITH R-4 GASKETS (IN PUBLIC RIGHT-OF-WAY).
- 1.2. CORRUGATED METAL PIPE (DRIVEWAY CULVERTS)
- FIELD VERIFY SIZE, ELEVATION, AND LOCATION OF EXISTING STORM SEWER AND NOTIFY ENGINEER OF ANY DISCREPANCIES PRIOR TO ANY INSTALLATIONS.
- 3. STORM SEWER LENGTHS INCLUDE THE LAYING LENGTH OF THE FLARED-END SECTION. LAYING LENGTH OF APRON TO BE DEDUCTED FROM PAYMENT LENGTH OF PIPE.
- TRASH GUARDS ARE NOT REQUIRED FOR CULVERTS.
 RIP-RAP (SEE DETAIL 500/C4.2) IS REQUIRED AT ALL PIPE DISCHARGE

BITUMINOUS NOTES

POINTS. RIP-RAP SHALL BE TYPE III WITH TYPE IV GEOTEXTILE FABRIC.

- 1. REMOVAL AND DISPOSAL OF EXISTING STREET MATERIALS AS
- REQUIRED FOR CONSTRUCTION IS CONSIDERED INCIDENTAL.

 2. ALL MATCH POINTS AND PAVEMENT PATCHES TO BE SAW-CUT AT FULL
- 3. RESTORE DISTURBED STREET TO EXISTING OR BETTER SECTION

MISCELLANEOUS NOTES

- 1. SEPTIC AND WELL DESIGN BY OTHERS.
- 2. SITE TOPOGRAPHY PROVIDED BY OTHERS.

AN MPCA NPDES CONSTRUCTION PERMIT IS REQUIRED PRIOR TO THE START OF CONSTRUCTION

SHEET INDEX

- C0 TITLE SHEET, LEGEND & GENERAL NOTES
- S1 CERTIFICATE OF SURVEY / RESOURCE INVENTORY
- C1.1 GRADING, DRAINAGE & EROSION CONTROL PLAN
 C1.2 GRADING, DRAINAGE & EROSION CONTROL PLAN
- C1.3 GRADING, DRAINAGE & EROSION CONTROL PLAN
- C2.1 PLAN / PROFILE 198TH AVE NE C2.2 PLAN / PROFILE - 198TH AVE NE
- C2.3 PLAN / PROFILE ALAMO ST NE
- C2.4 CR15 RIGHT-TURN LANE PLAN
- C3.1 CROSS-SECTIONS
 C3.2 CROSS-SECTIONS
- C4.1 DETAILS & LOT CHART
- C4.1 DETAILS &
- C5.1 STORMWATER POLLUTION PREVENTION PLAN (SWPPP)

STORMWATER POLLUTION PREVENTION PLAN (SWPPP)

LEGEND

DENOTES EXISTING FENCE

DENOTES EXISTING CONTOURS (SHOWN AT 2 FOOT INTERVAL)

DENOTES PROPOSED CONTOURS (2 FOOT INTERVAL)

DENOTES PROPOSED SPOT ELEVATION

TP-1 DENOTES TEST PIT (TRADEWELL SOIL TESTING, INC.)

DENOTES BUILDING SETBACK LINE

DENOTES CABLE PEDESTAL

DENOTES TELEPHONE PEDESTAL

DENOTES UTILITY POLE

DENOTES GUY WIRE

DENOTES TREE LINE

EXISTING TREES

EXISTING TREES (TO BE REMOVED)

DENOTES EXISTING GRAVEL SURFACE

DENOTES EXISTING BITUMINOUS SURFACE

DENOTES PROPOSED SILT FENCE

DENOTES PROPOSED BIOROLLS

DENOTES TREE PROTECTION FENCING

DENOTES PROPOSED STORM SEWER PIPE

DENOTES PROPOSED STORM SEWER FLARED-END

DENOTES VEHICLE MAINTENANCE ACCESS ROUTE

(SEE DETAIL 501/C4.2)

(SEE DETAIL 503/C4.2)

DENOTES PROPOSED RIPRAP

(SEE DETAIL 500/C4.2)

DENOTES WETLAND BUFFER

DENOTES WETLAND SETBACK

DENOTES WETLAND DELINEATION BY KJOLHAUG

ENVIRONMENTAL SERVICES. FLAGS LOCATED BY

APPROVED FOR COUNTY TURN LANE ITEMS ONLY

ANOKA COUNTY ENGINEER DATE

BLOCK 1

SITE

SITE

196TH AVE NE

196TH AVE NE

196TH AVE NE

VICINITY MAP

S PREPARED BY N AND THAT I AM 1 1-5-24 PLAT EXPANDED & RENAMED 2 2-12-24 CITY REVIEW #1 3 4-10-24 ACHD REVIEW #1 4 5-1-24 ACHD SIGNATURE BLOCK ADDED 5 9-27-24 CITY REVIEW COMMENTS 6 4-24-25 EASEMENTS ADJUSTED 7 NO. DATE DESCRIPTION

PLOWE

6776 LAKE DRIVE

LINO LAKES, MN 5501

PHONE: (651) 361-8210 FAX: (651) 361-8701

DRAWN BY: CHECK B

22-2076 11/16/22

GRAPHIC SCALE

1 INCH = 120 FEET

I HEREBY CERTIFY THAT THIS PLAN WAS PREPARED BY ME OR UNDER MY DIRECT SUPERVISION AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MINNESOTA.

ADAM GINKEL
ADAM GINKEL
ADAM GINKEL

EN PRAIRIE BETHEL, MINNESOTA , LEGEND & NOTES

HIDDEN PRA CITY OF EAST BETHEL, M ITLE SHEET, LEGENI

SHEET CO

ENGINEER

PLOWE ENGINEERING, INC. ADAM GINKEL 6776 LAKE DR LINO LAKES, MN 55014 (651) 361-9182

DEVELOPER

TH CONSTRUCTION OF ANOKA TONY HENNEN 617 E MAIN ST STE 3 EAST BETHEL, MN 55303 (763) 422-8809


SURVEYOR

EG RUDS LAND SURVEYING, INC.
JASON RUD
6776 LAKE DR
LINO LAKES, MN 55014
(651) 361-8200


S:\PLOWE\CAD\23PROJ\2125 HIDDEN PRAIRIE\2125 CAD\2125 BASE 13.DWG
Thursday, April 24, 2025 12:16:42 PM

S:\PLOWE\CAD\23PROJ\2125 HIDDEN PRAIRIE\2125 CAD\2125 BASE 13.DWG


Tuesday, May 6, 2025 9:33:58 AM

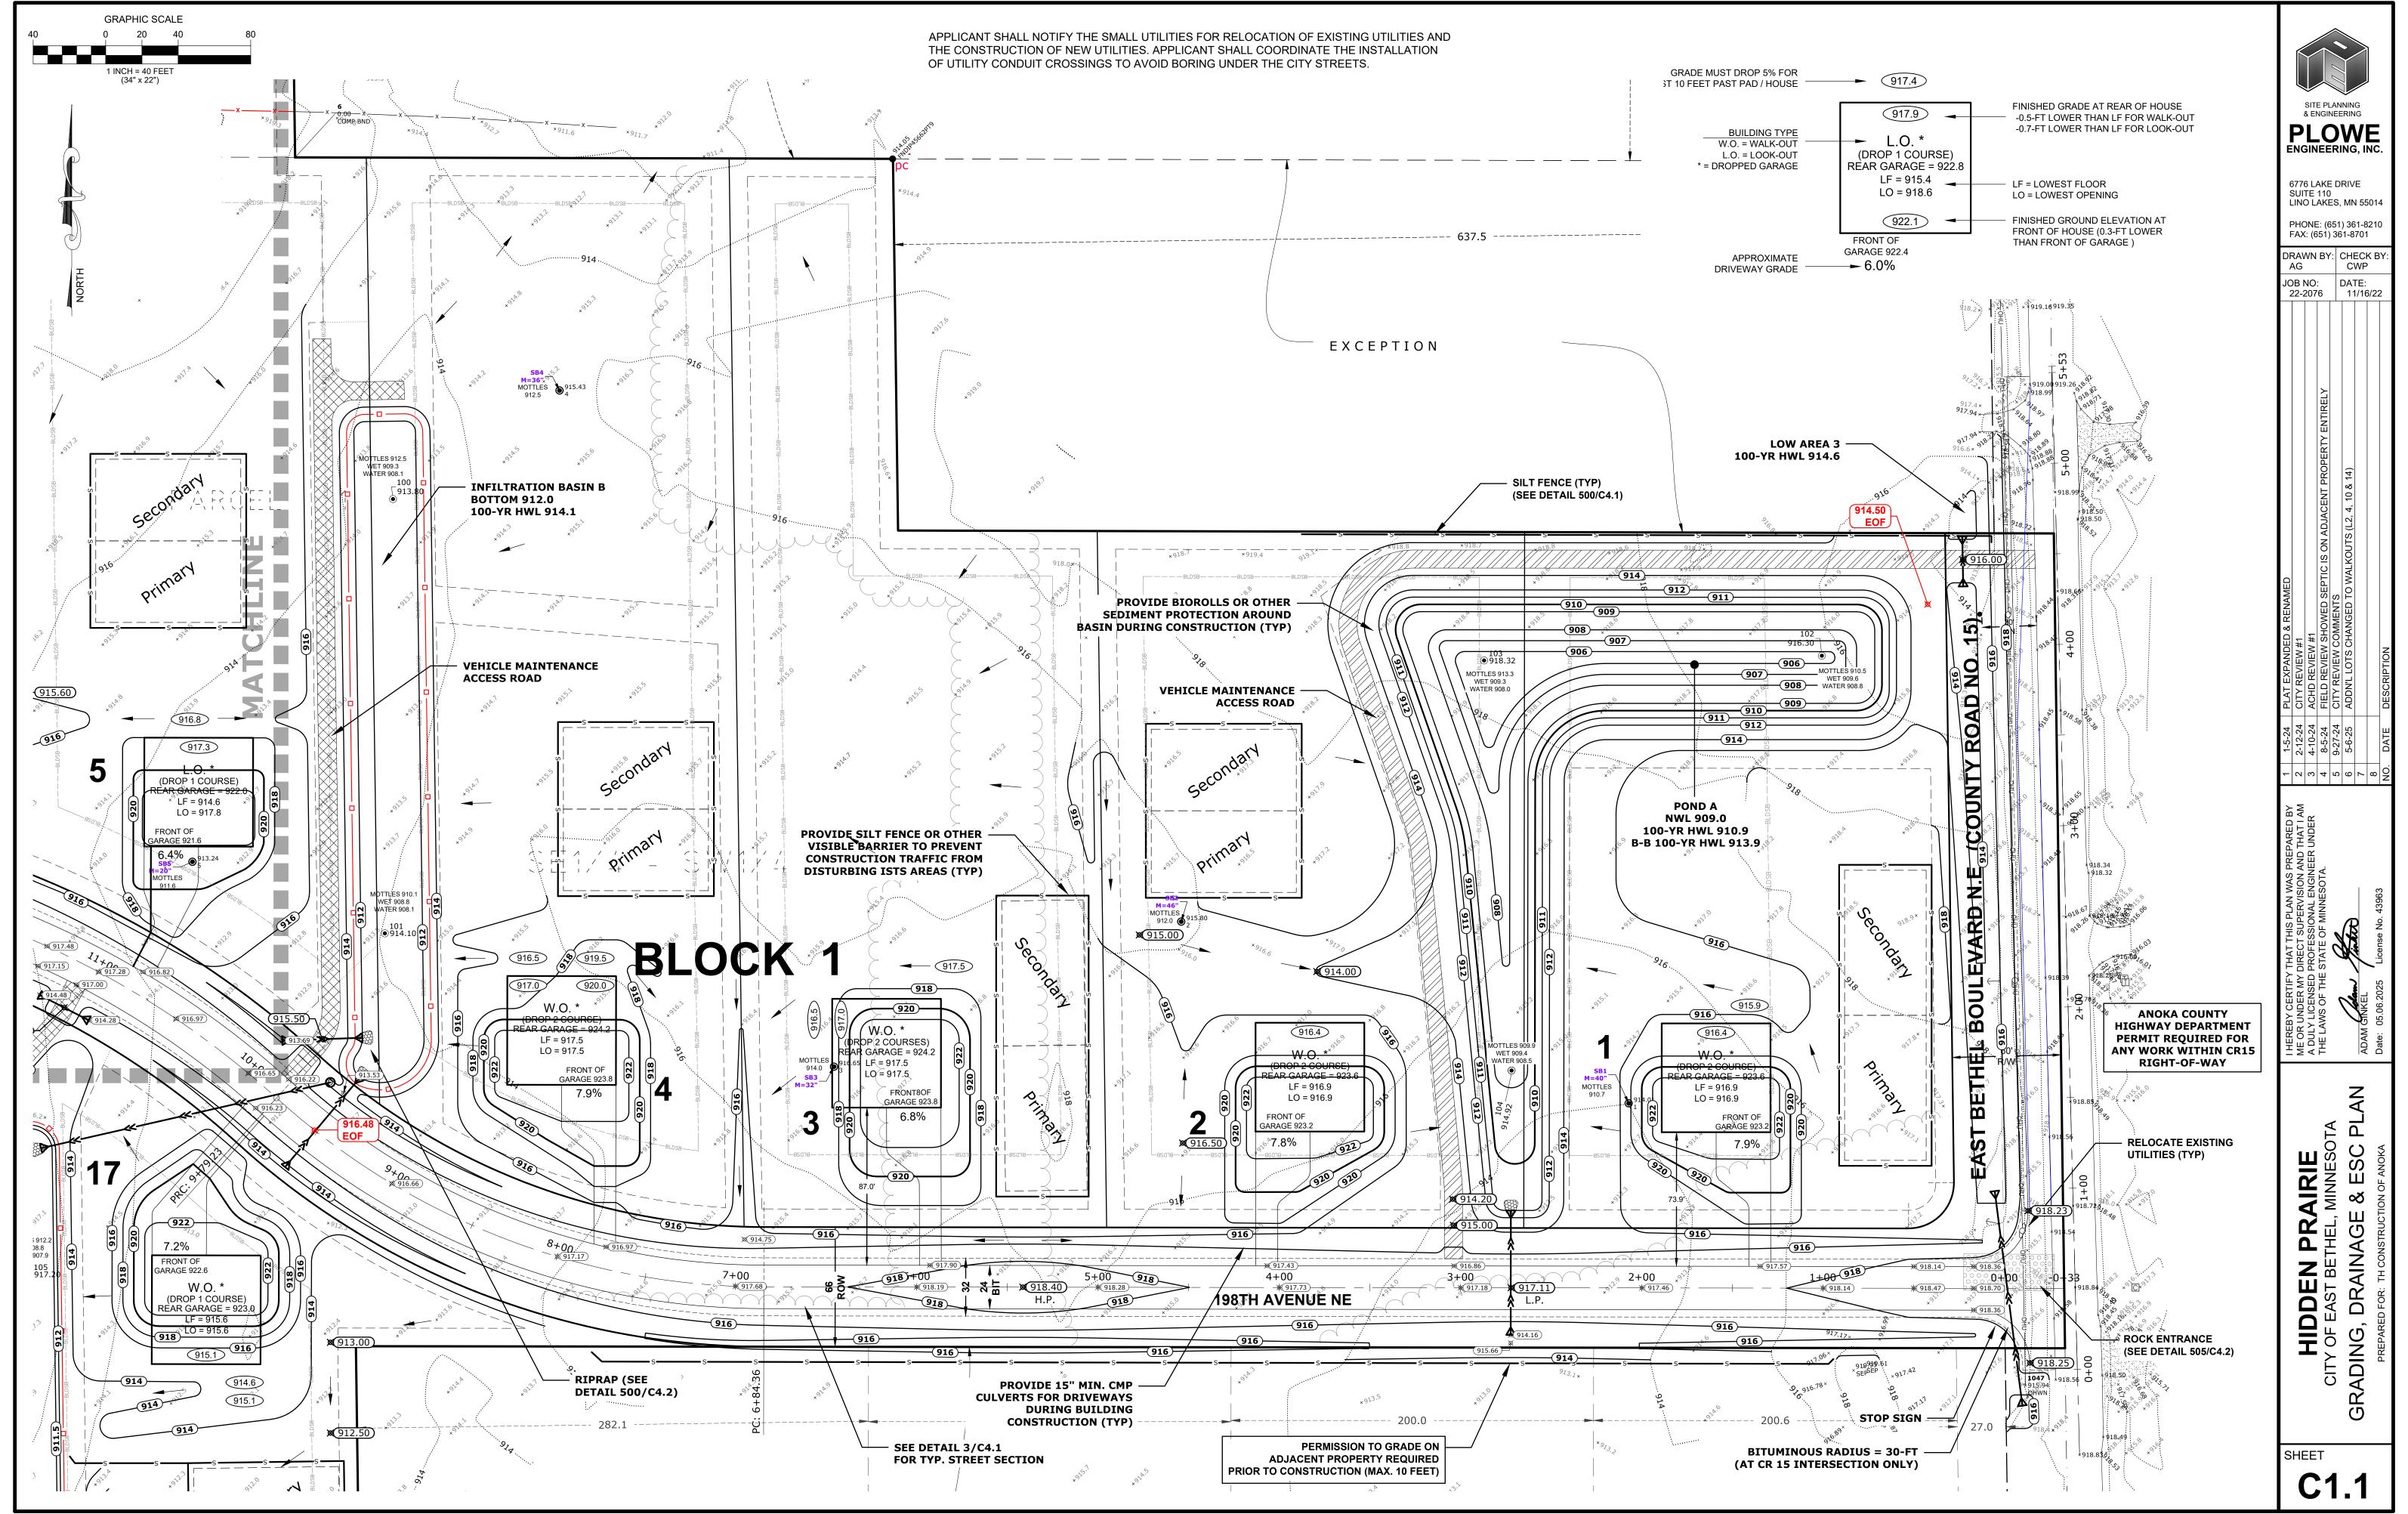



Tuesday, May 6, 2025 9:33:58 AM

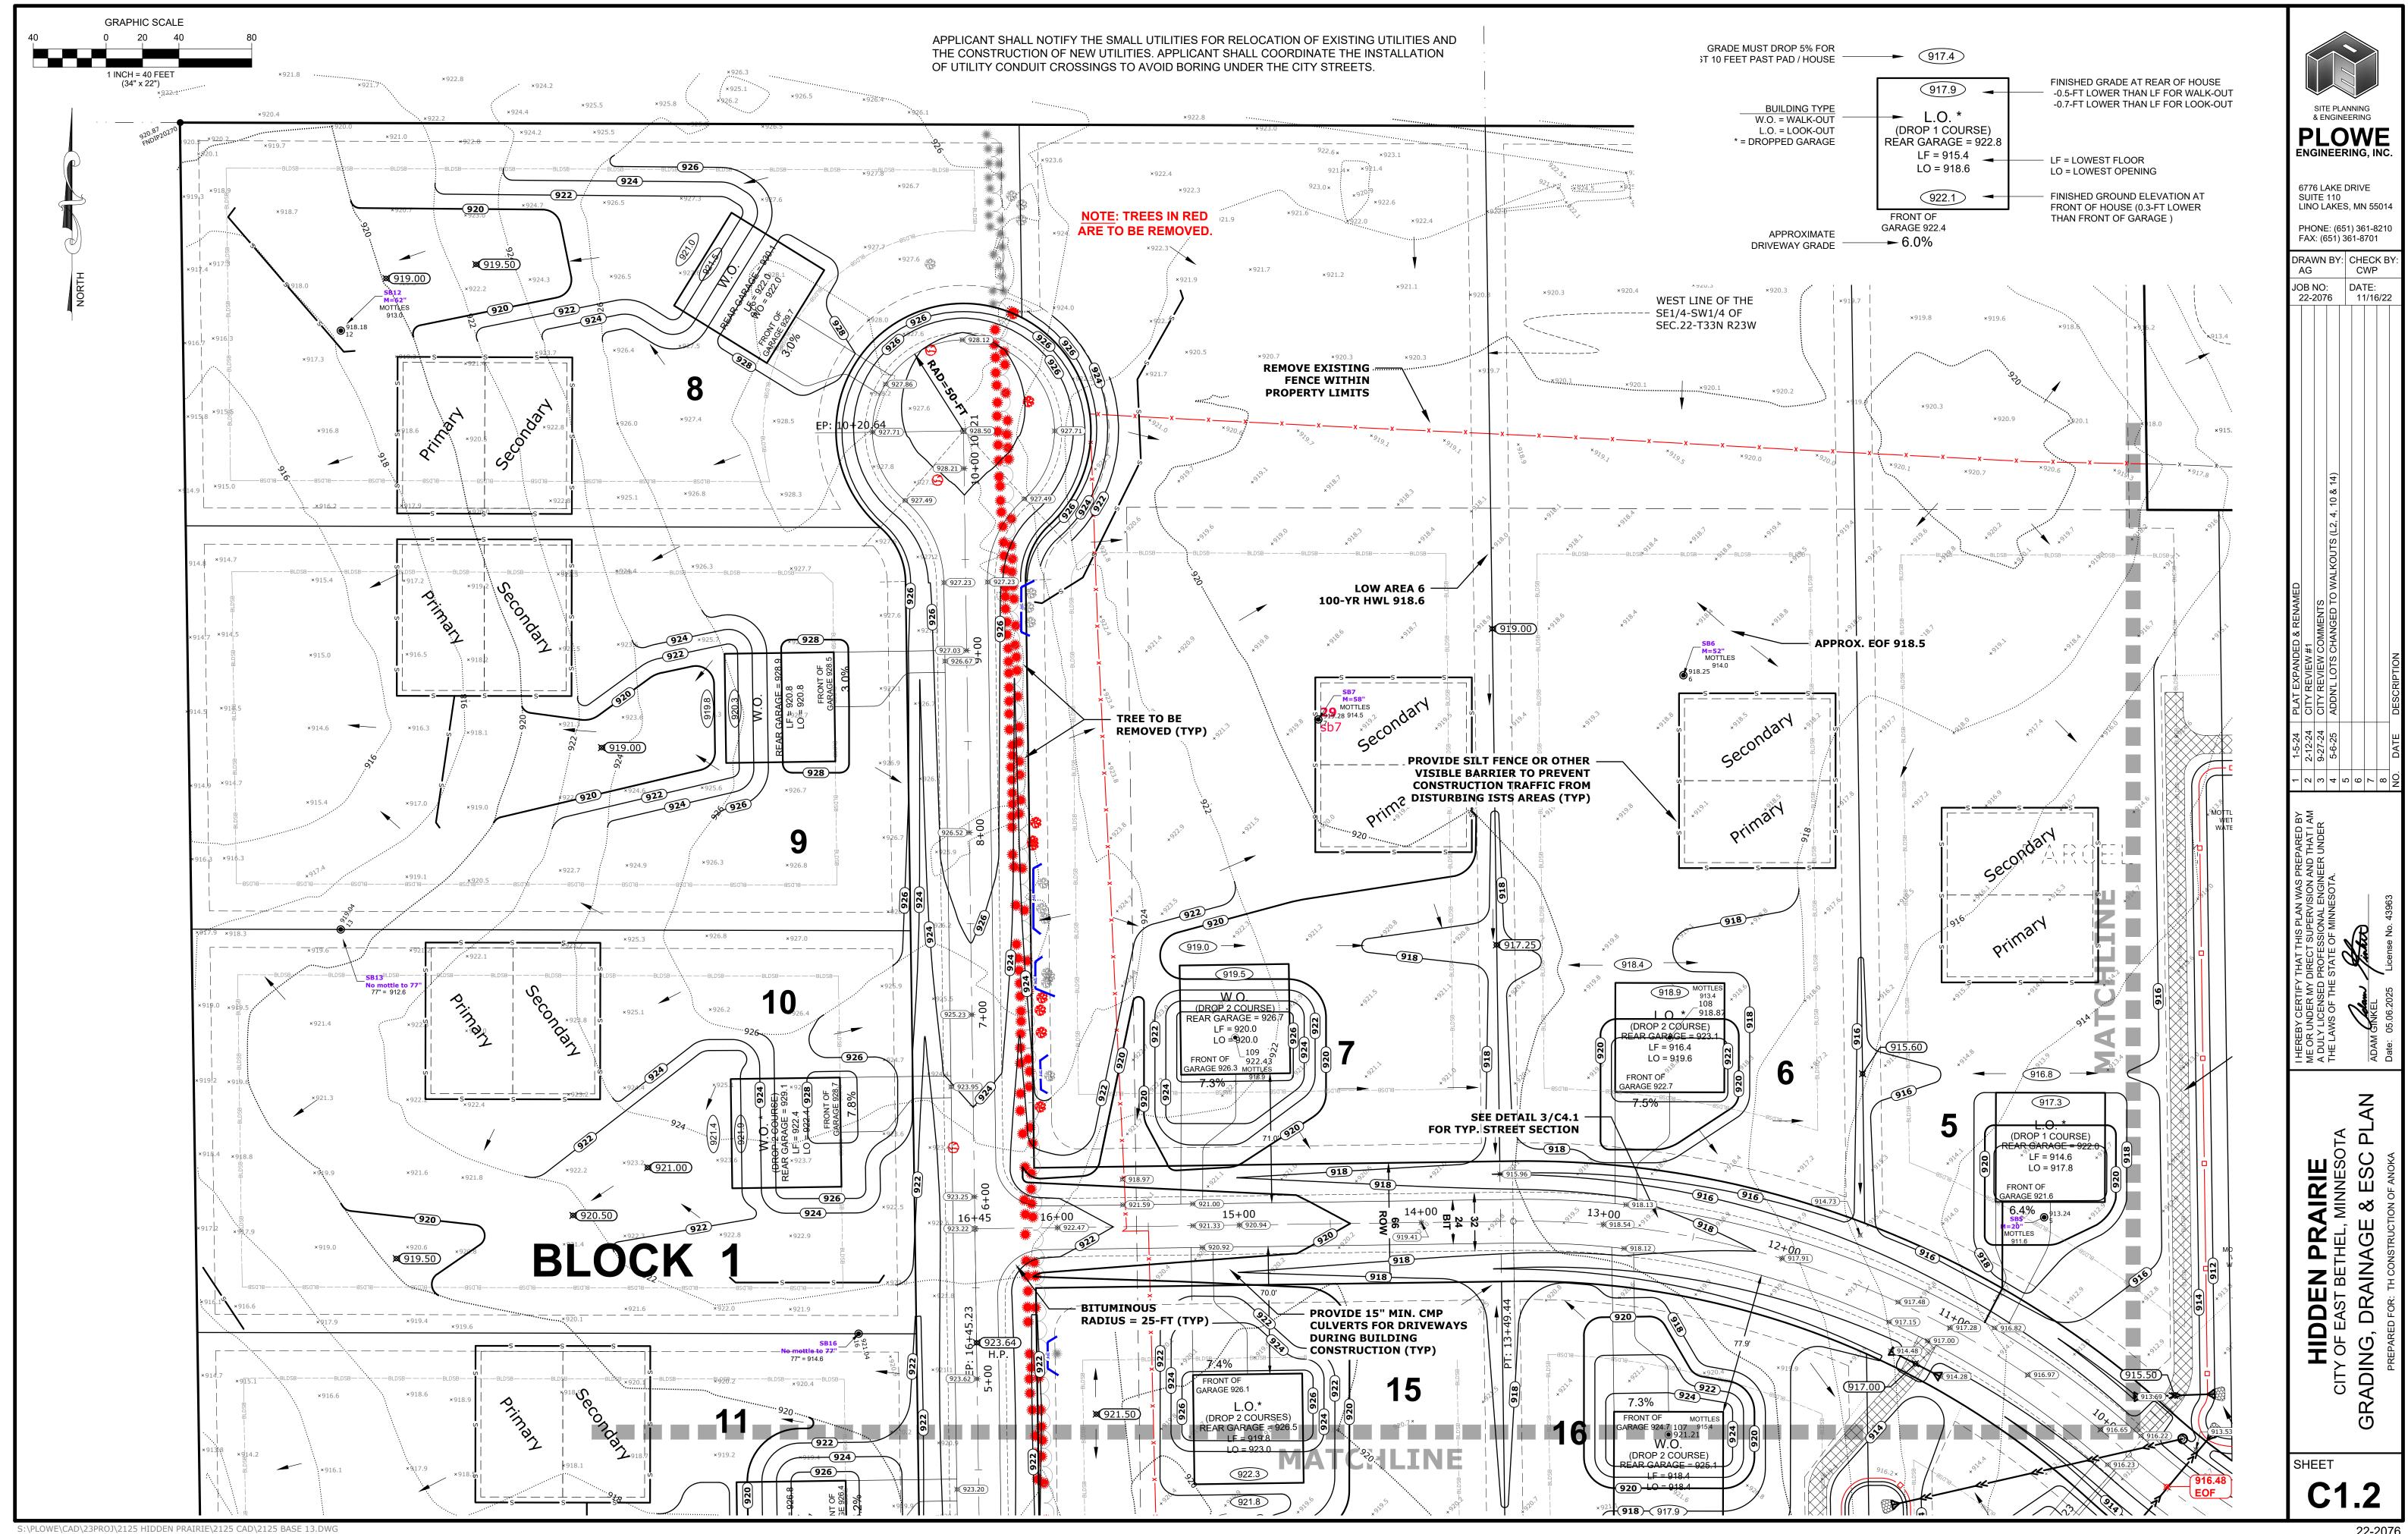

Tuesday, May 6, 2025 9:33:58 AM

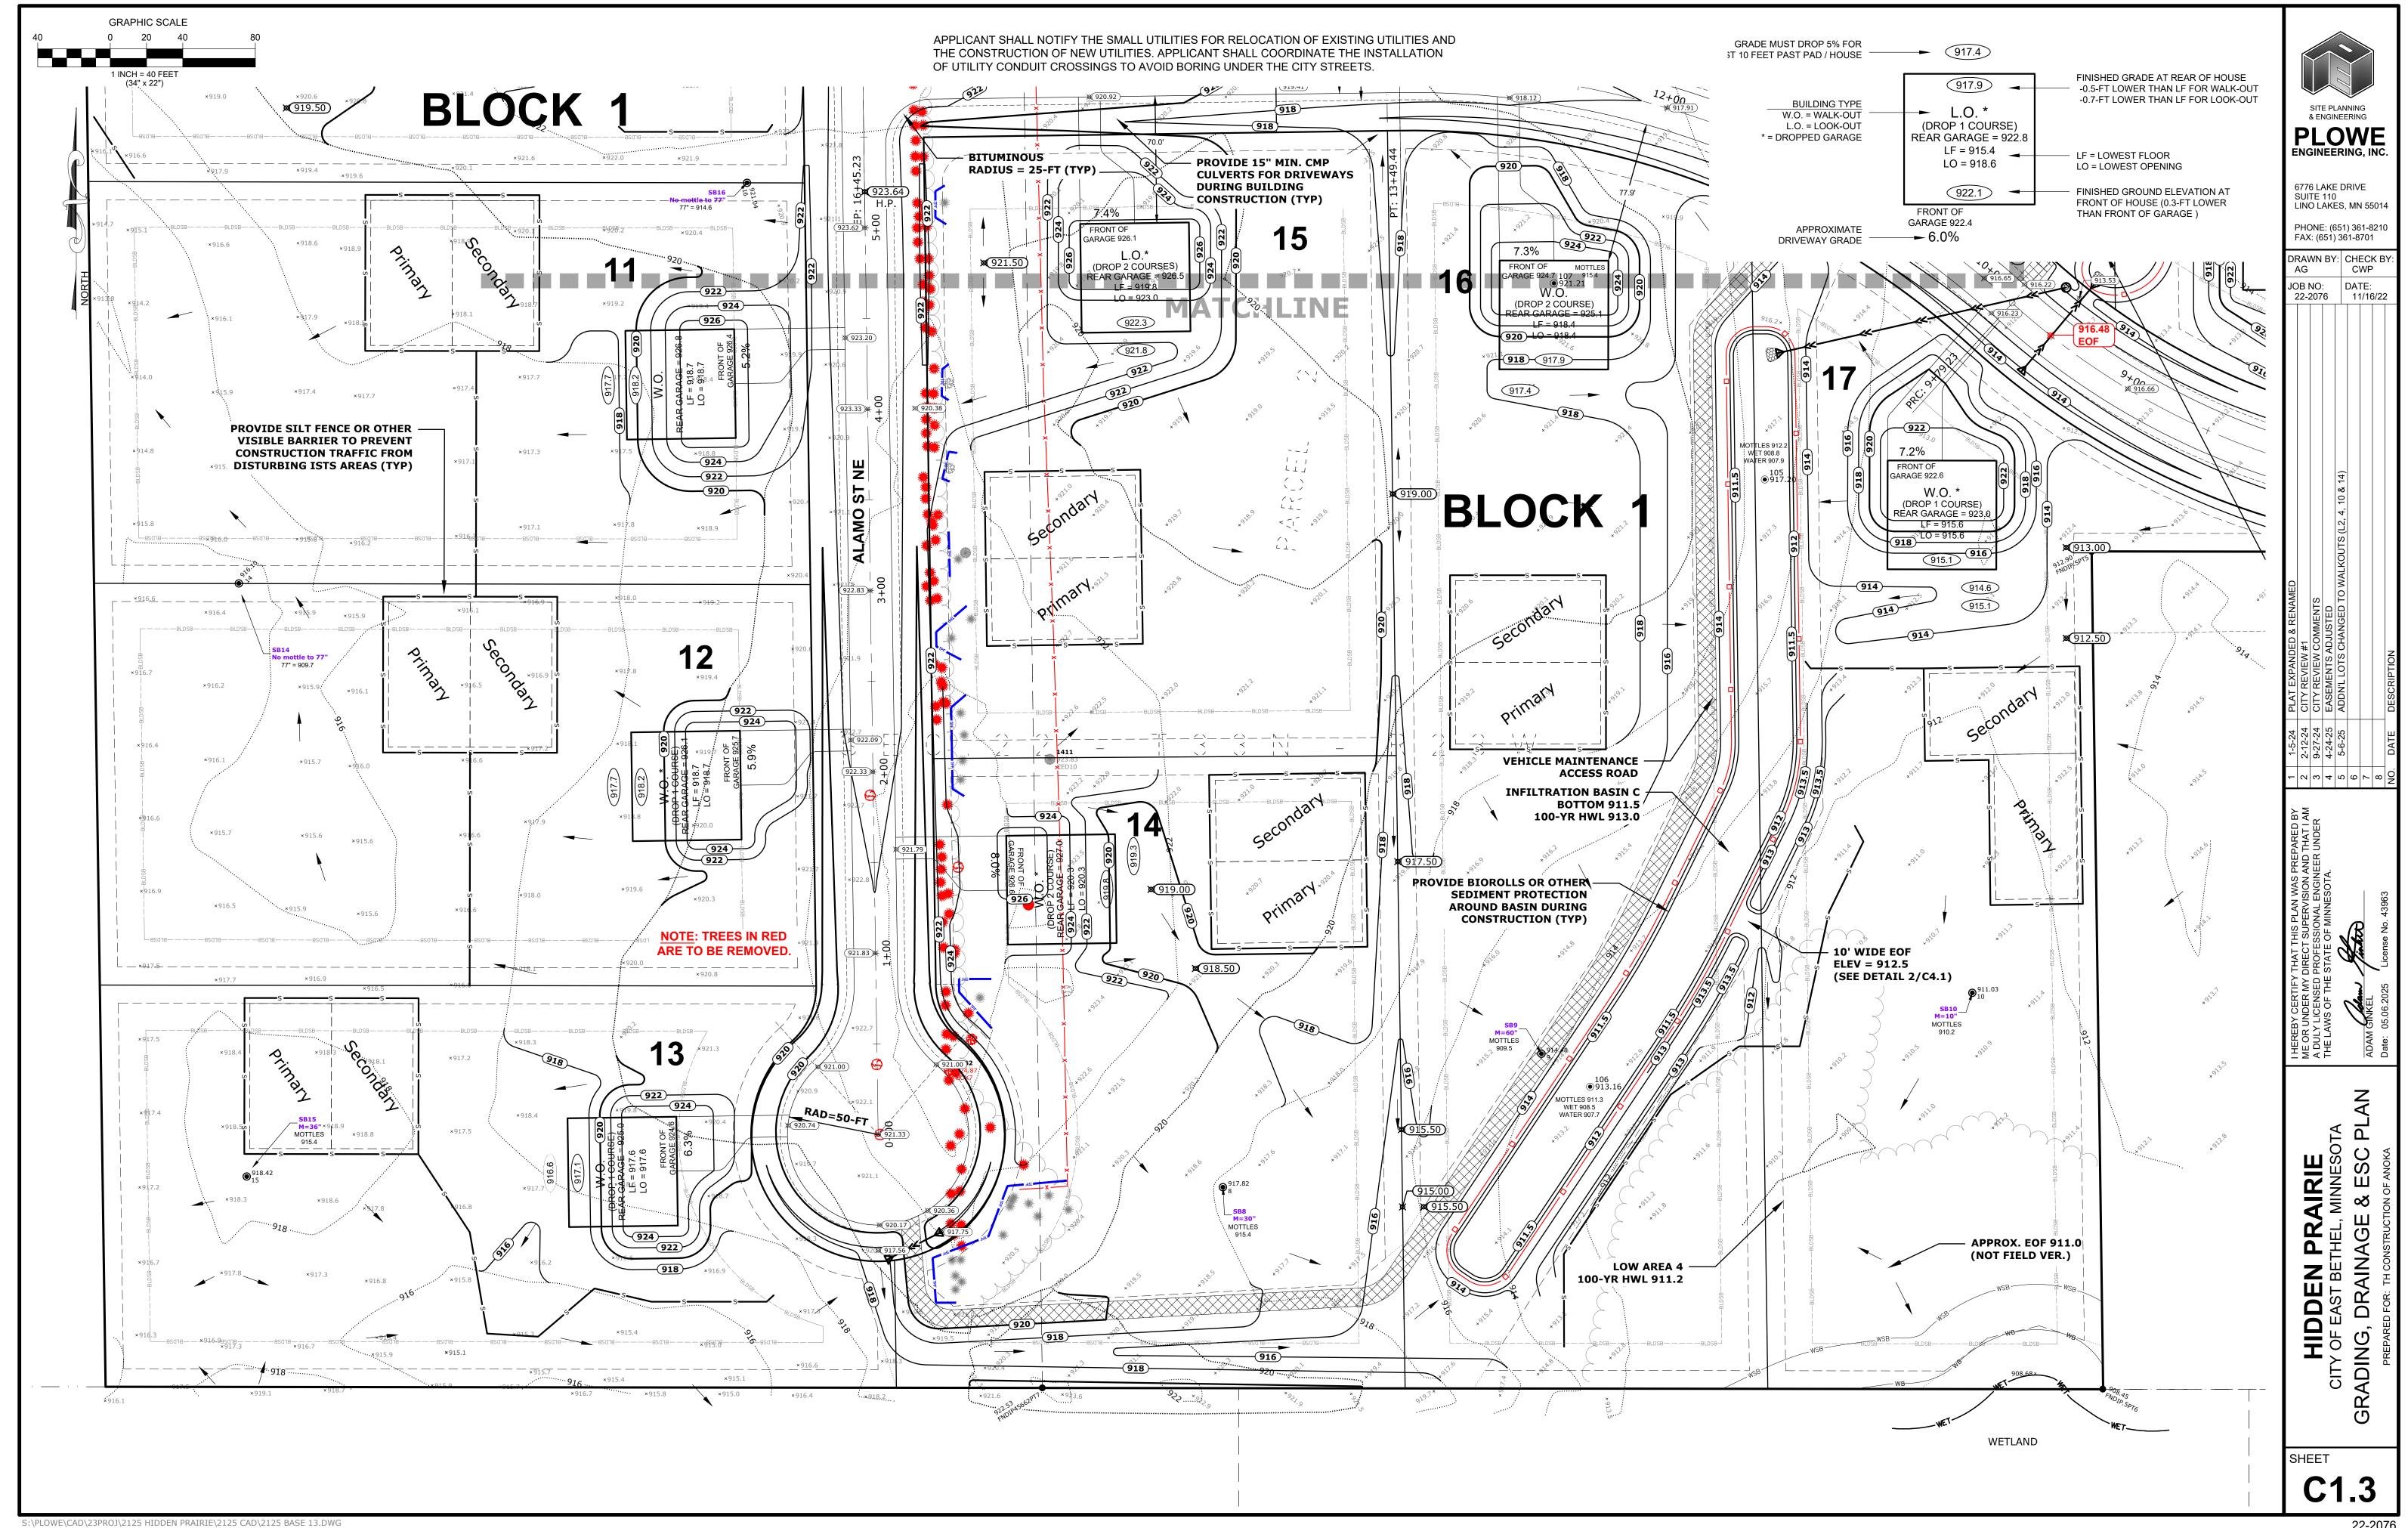

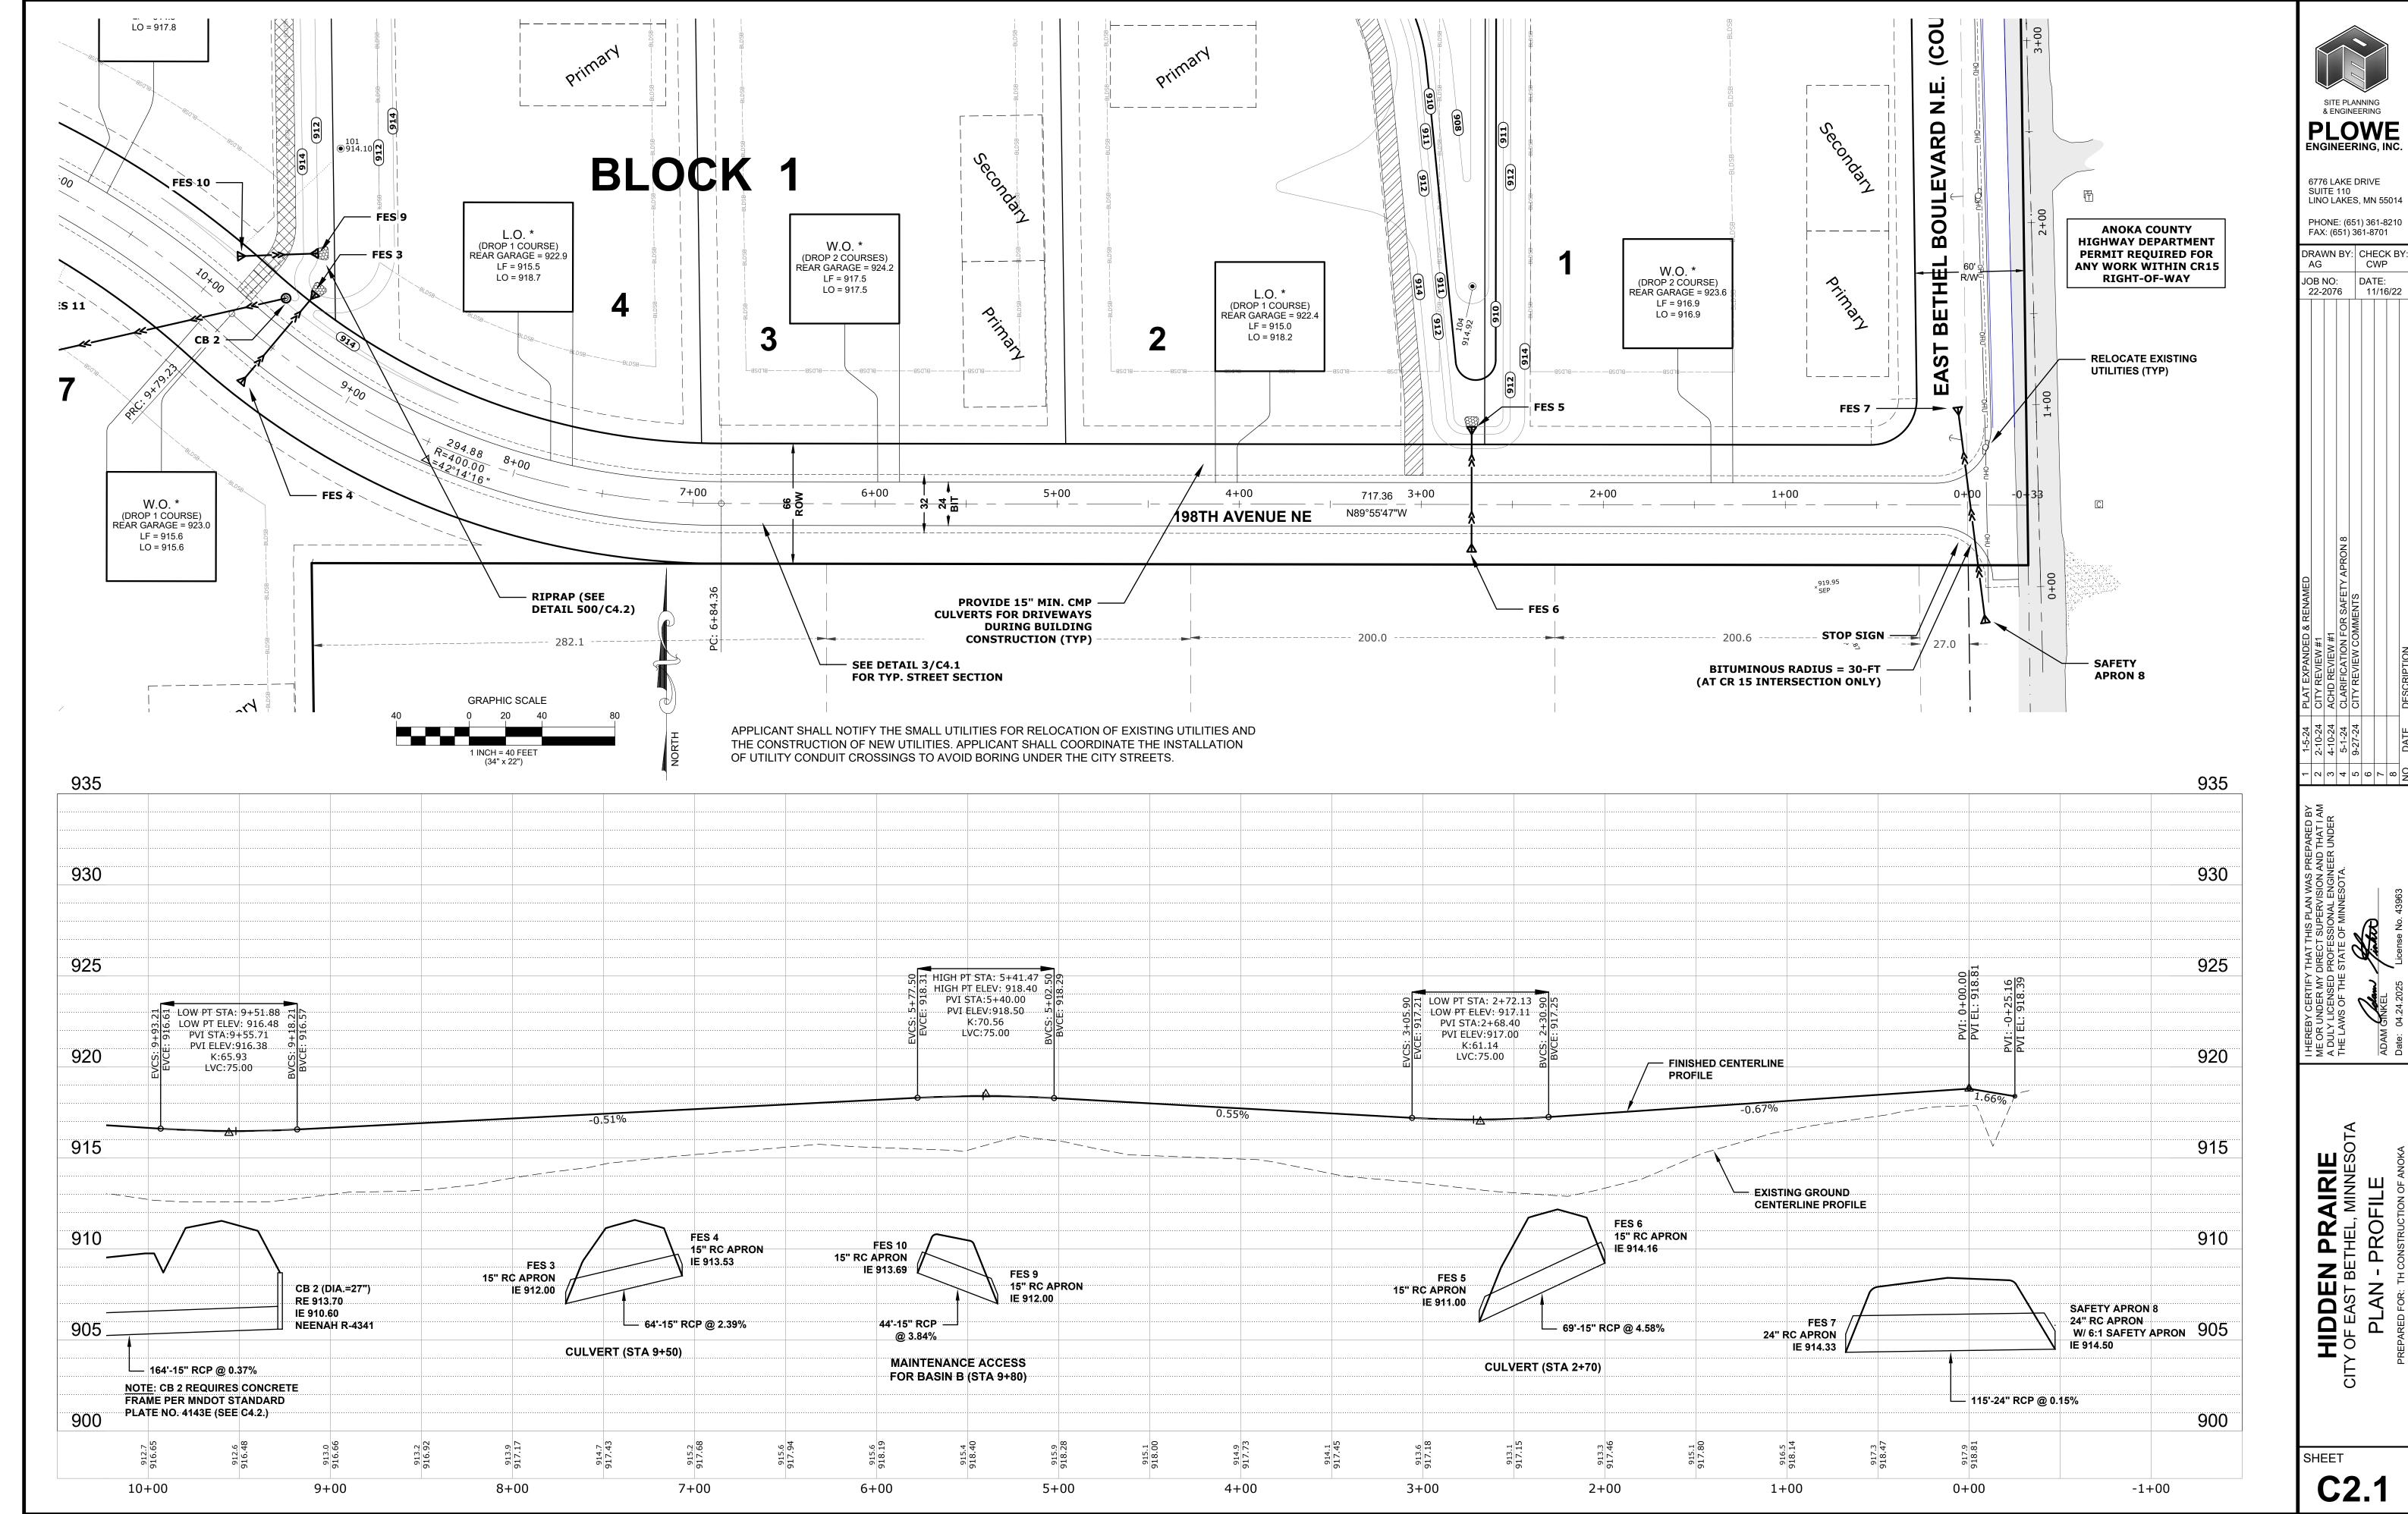

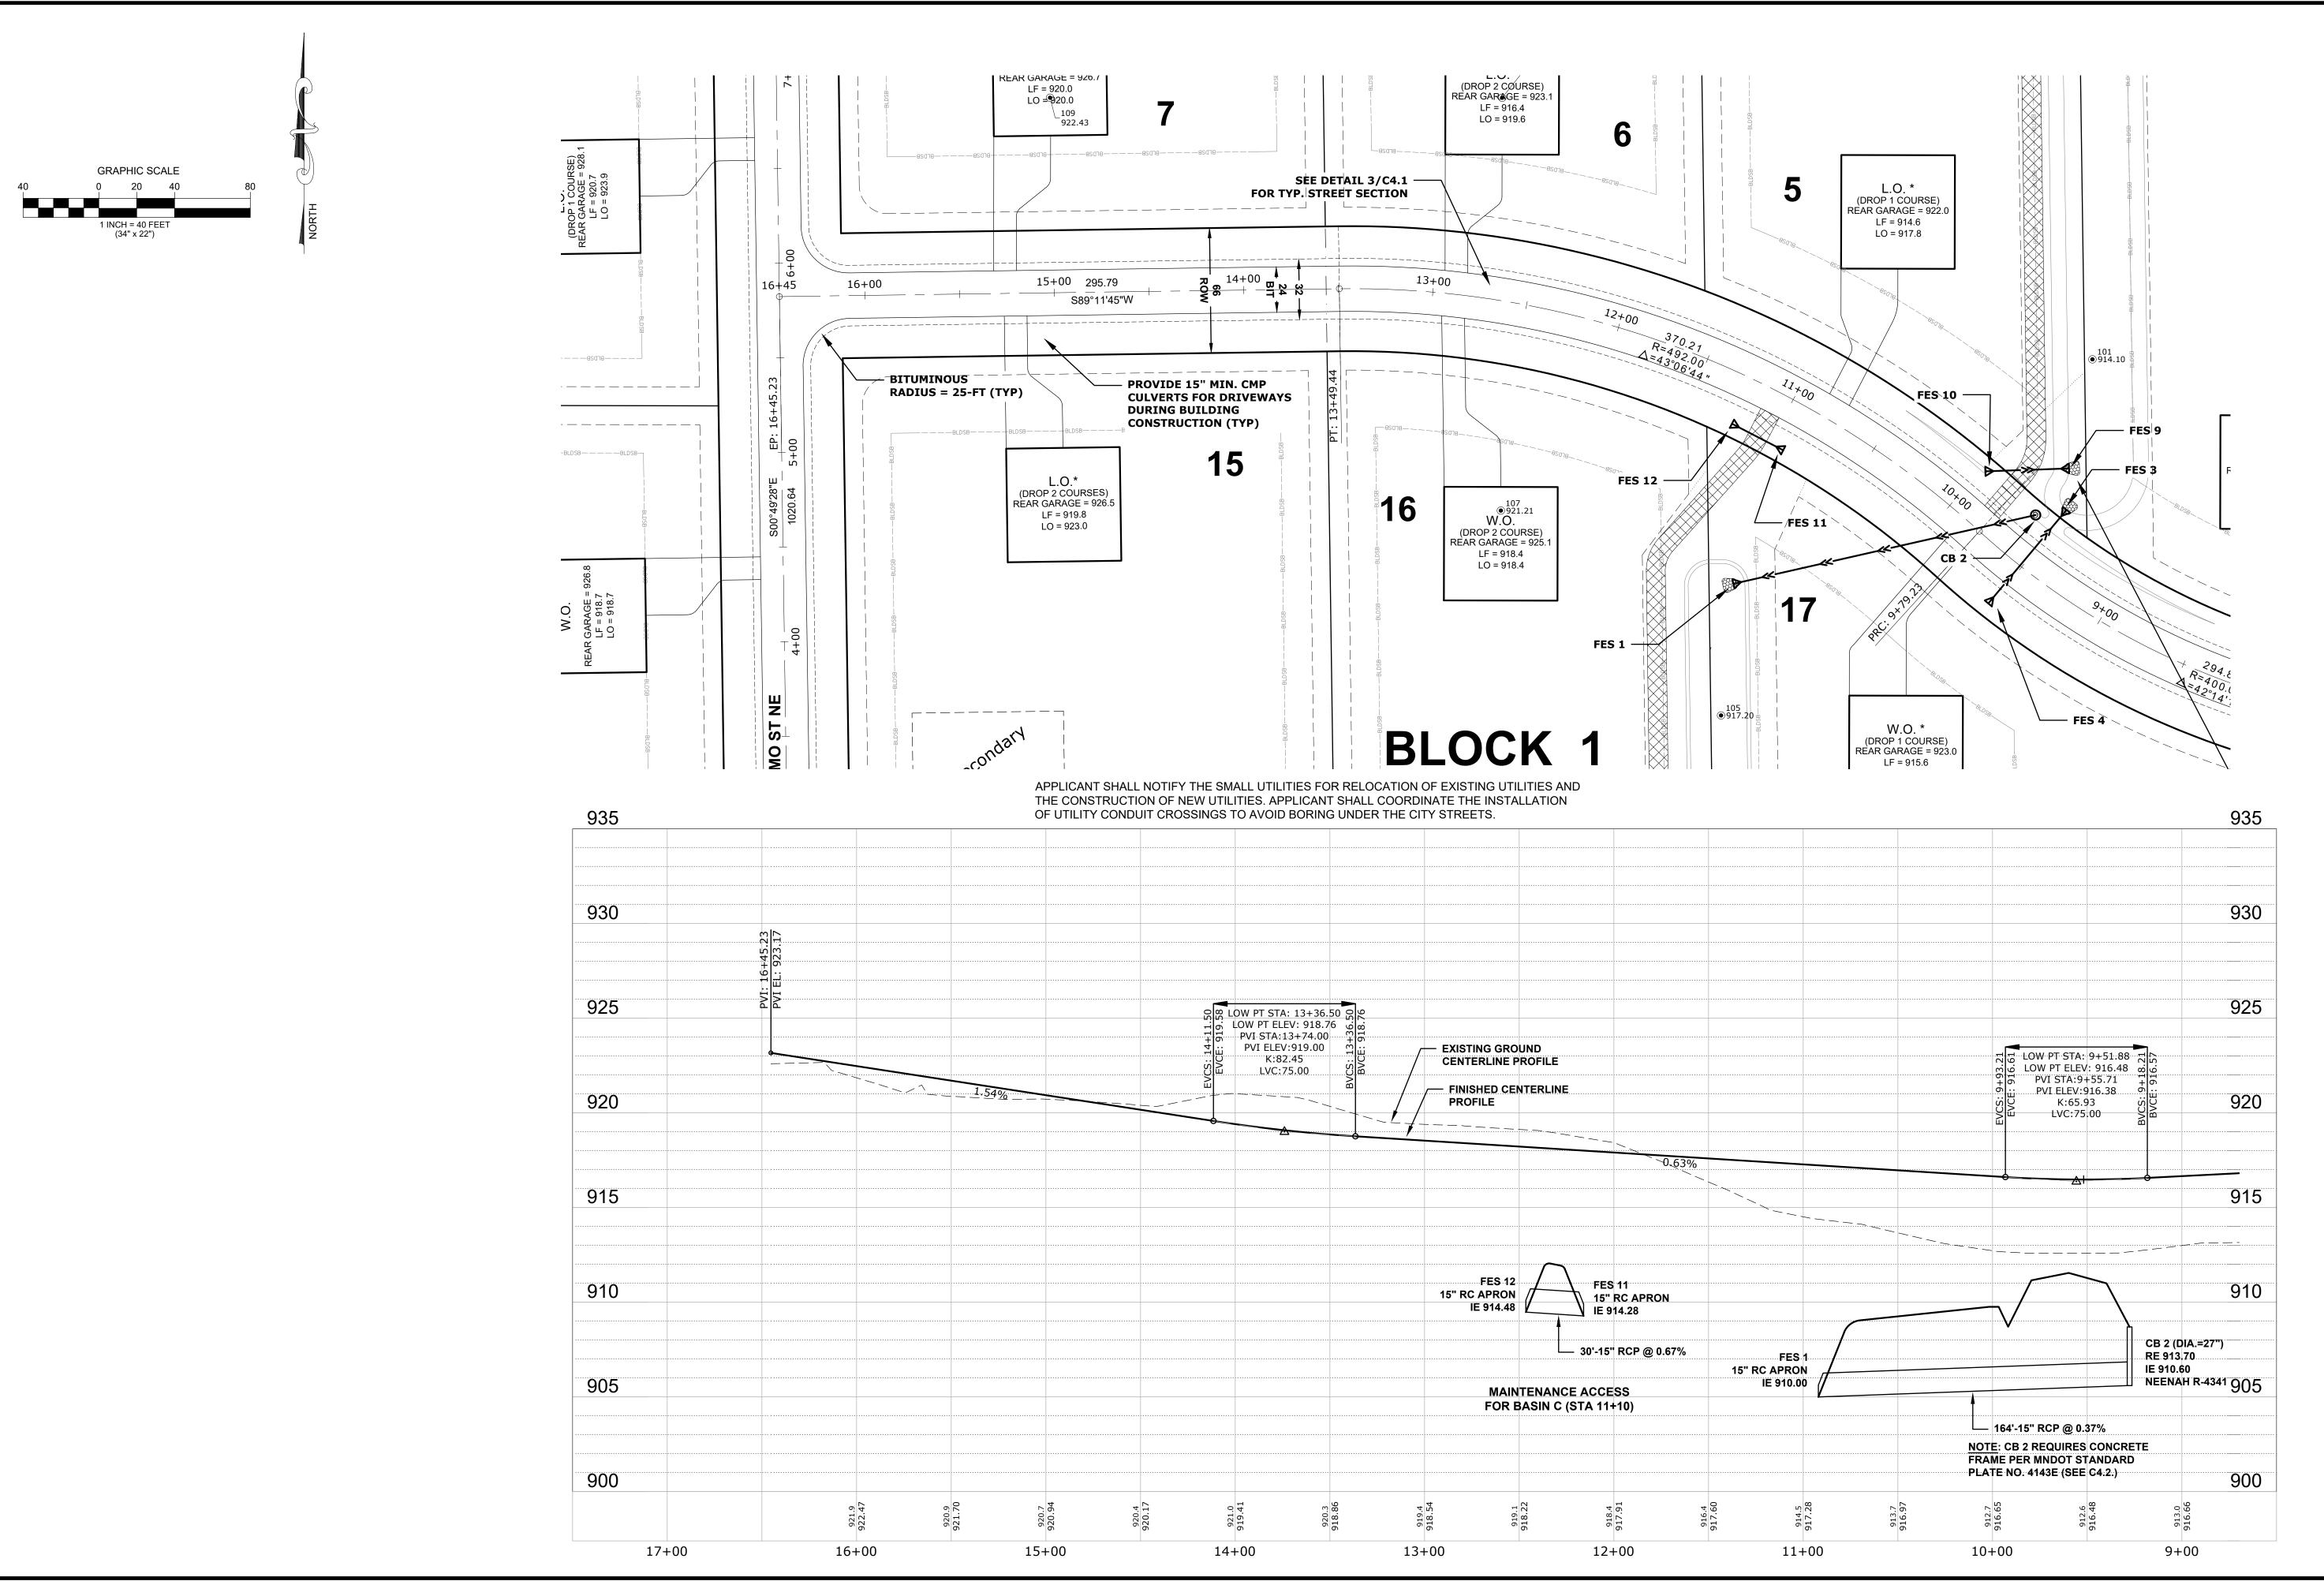


& ENGINEERING PLOWE ENGINEERING, INC. 6776 LAKE DRIVE SUITE 110 LINO LAKES, MN 55014 PHONE: (651) 361-8210 FAX: (651) 361-8701 DRAWN BY: CHECK BY CWP JOB NO: DATE: 22-2076 11/16/22 - 2 8 4 5 9 **6** 6 PREPARED BY AND THAT I AM EER UNDER


HIDDEN PRAIRIE
CITY OF EAST BETHEL, MINNESOTA
PLAN - PROFILE
PREPARED FOR: TH CONSTRUCTION OF ANOKA

SHEET **C2.2**

Thursday, April 24, 2025 12:16:42 PM

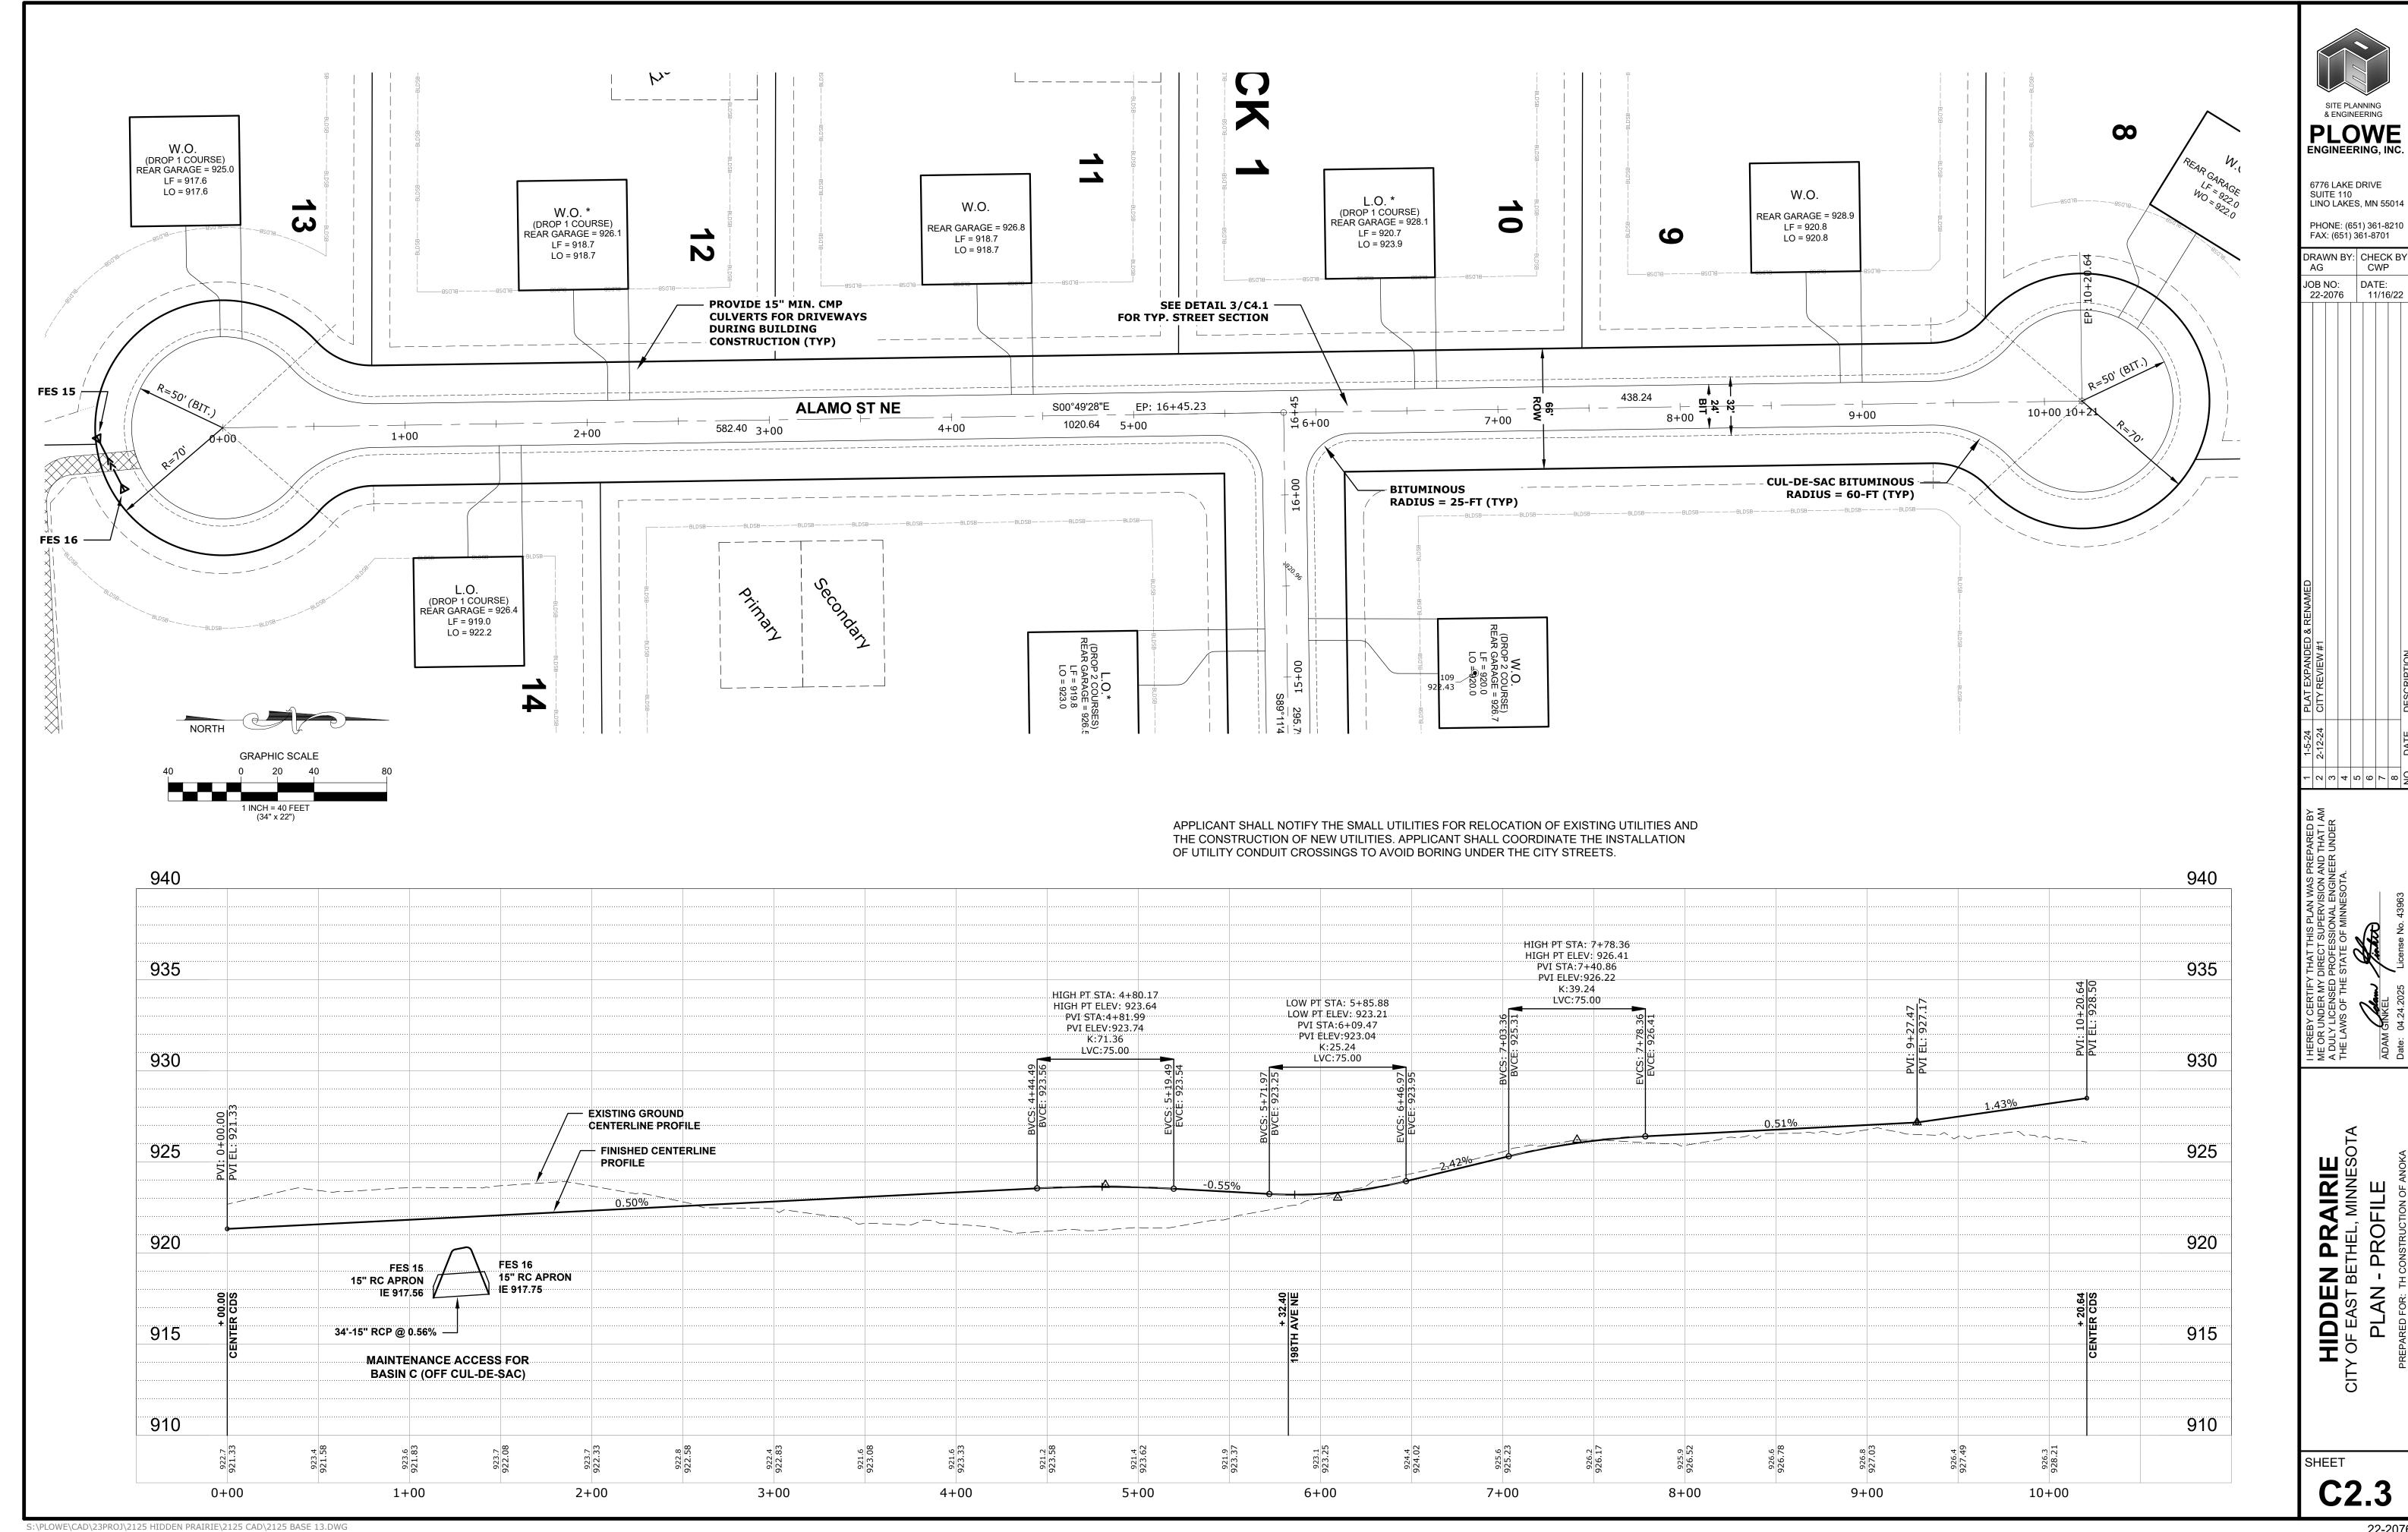


22-2076

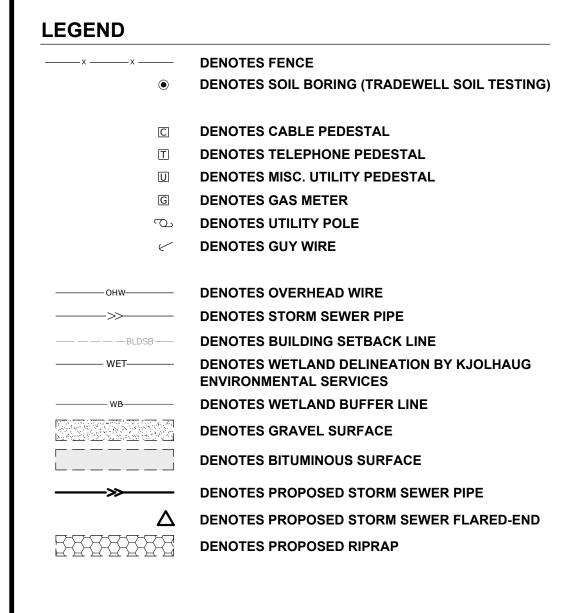


MISCELLANEOUS NOTES


- 1. SEE SHEET C0 FOR ADDITIONAL CONSTRUCTION NOTES.
- 2. SEE SHEETS C4.1 AND C4.2 FOR STANDARD DETAILS. 3. SEE SHEETS C5.1 AND C5.2 FOR STORMWATER POLLUTION PREVENTION

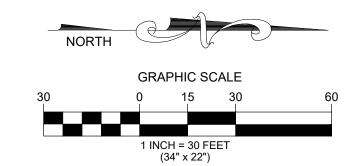



PROPOSED RIGHT TURN LANE

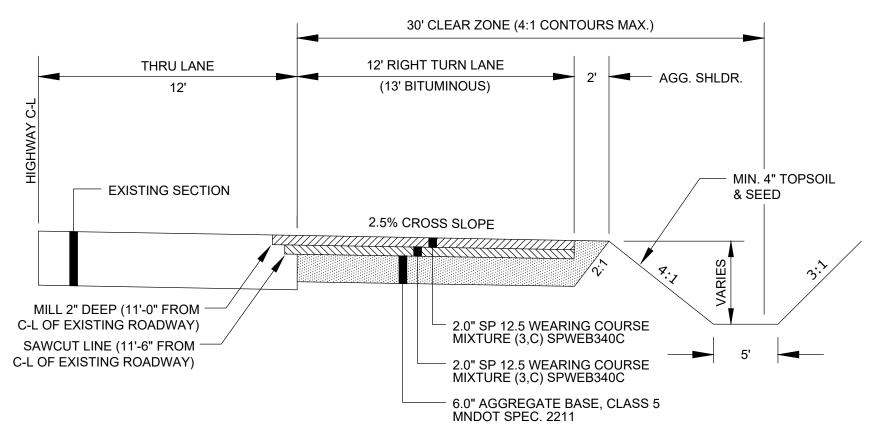



- ALL INSTALLATIONS SHALL BE IN ACCORDANCE WITH MNDOT SPECIFICATIONS (LATEST EDITION) 2. ALL DISTURBED SOIL WITHIN COUNTY RIGHT-OF-WAY MUST BE SEEDED (MNDOT 25-141) & MULCHED
- (TYPE 1, DISC ANCHORED) 3. USE ALL STRAW FIBER BLANKET FOR DITCH SLOPES OF 3:1 OR GREATER
- 4. PAVEMENT MARKINGS SHALL BE EPOXY
- 5. CONTRACTOR TO CONTACT ANOKA COUNTY PERMITS SECTION AT (763) 324-3176 TO OBTAIN THE RIGHT-OF-WAY PERMIT.




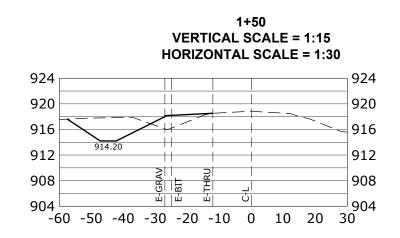








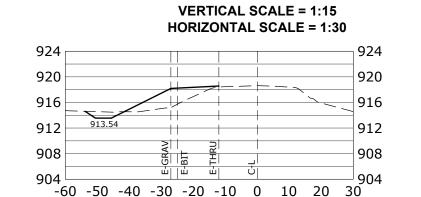





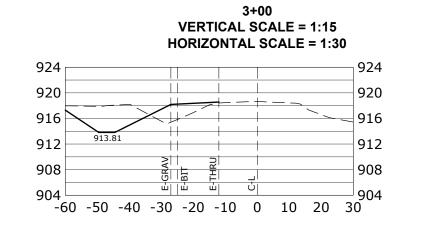





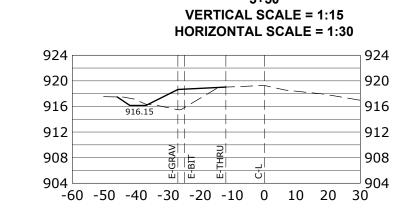

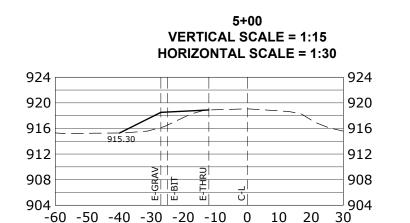



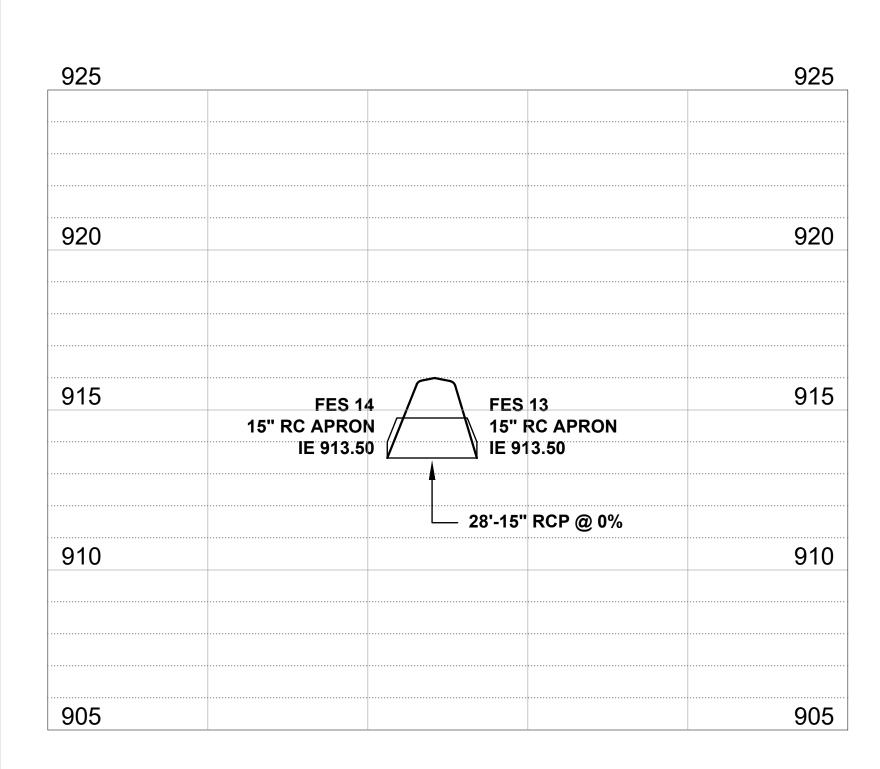

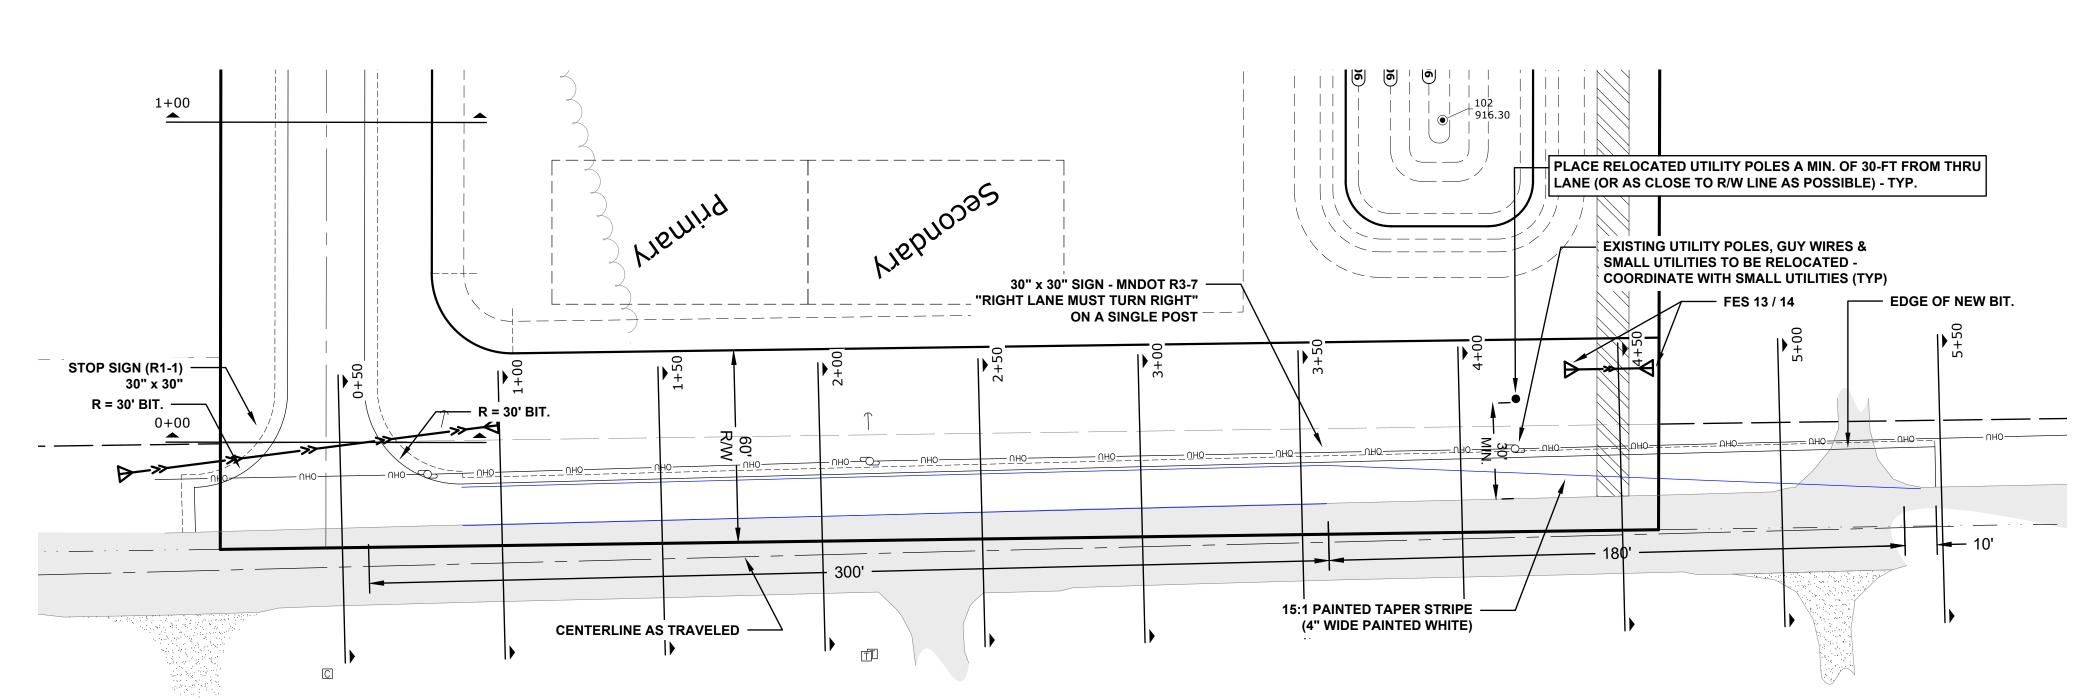



& ENGINEERING **PLOWE ENGINEERING, INC** 6776 LAKE DRIVE SUITE 110 LINO LAKES, MN 55014 PHONE: (651) 361-8210 FAX: (651) 361-8701 DRAWN BY: CHECK BY CWP 22-2076 11/16/22
 2
 8
 8


TURN LANE PLAN HIDDEN Y OF EAST BET


SHEET


198TH AVENUE N.E.

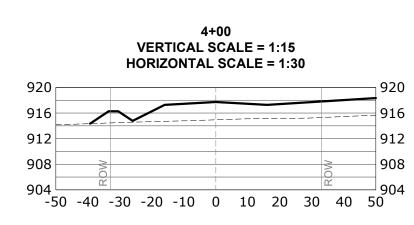








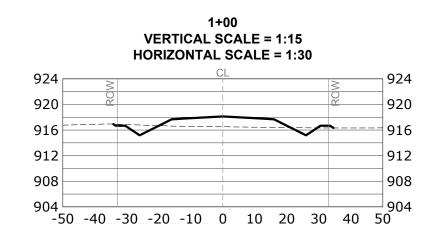


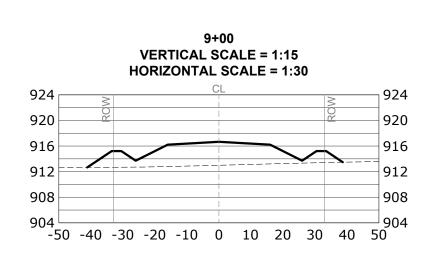


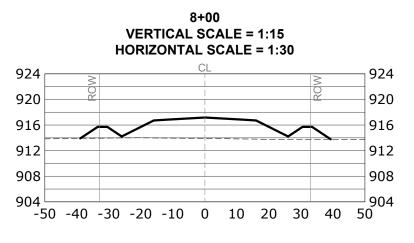





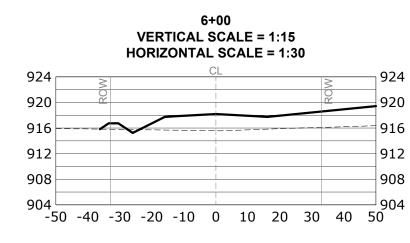


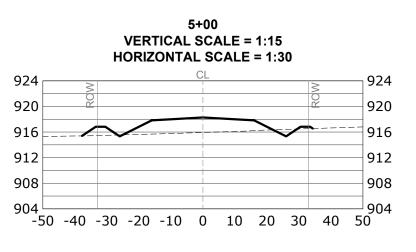


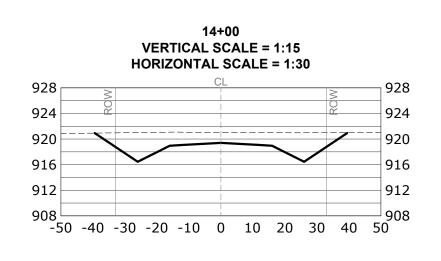


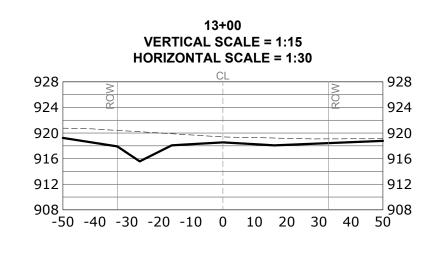


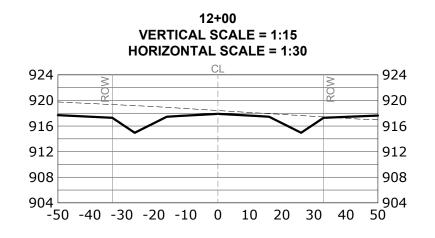

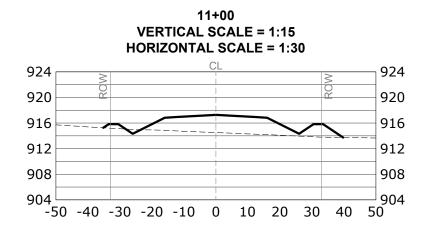

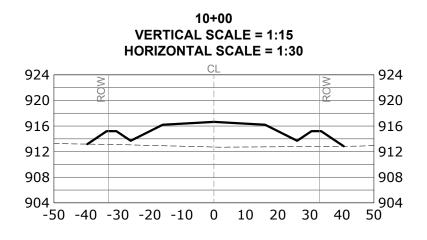

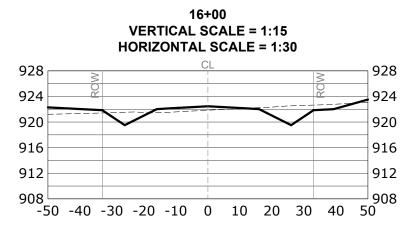

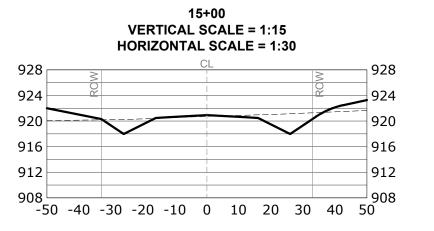



SITE PLANNING & ENGINEERING

PLOWE ENGINEERING, INC.

6776 LAKE DRIVE SUITE 110
LINO LAKES, MN 55014

PHONE: (651) 361-8210
FAX: (651) 361-8701







HIDDEN PRAIRIE
TY OF EAST BETHEL, MINNESOTA
CROSS-SECTIONS


SHEET


C3.1


ALAMO ST NE

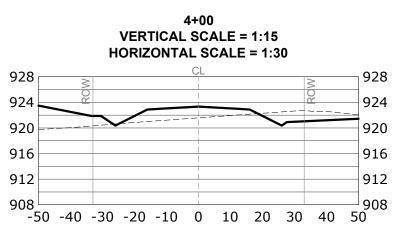



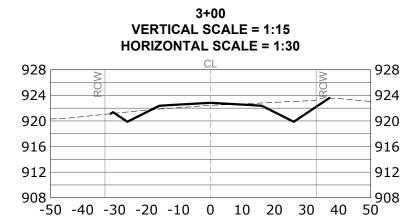

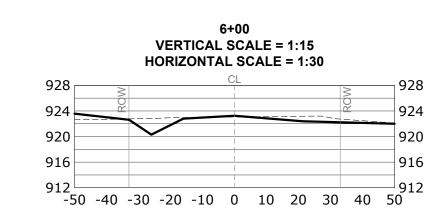


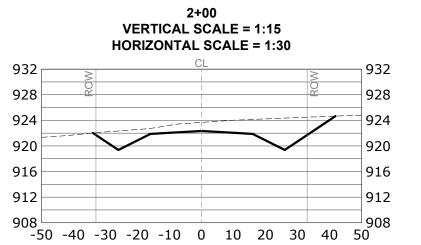


1+00 VERTICAL SCALE = 1:15 HORIZONTAL SCALE = 1:30


908 -50 -40 -30 -20 -10 0 10 20 30 40 50


928 924

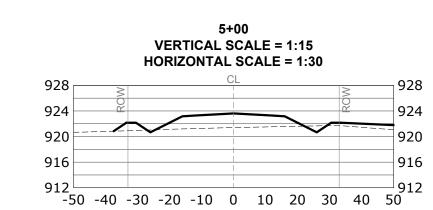


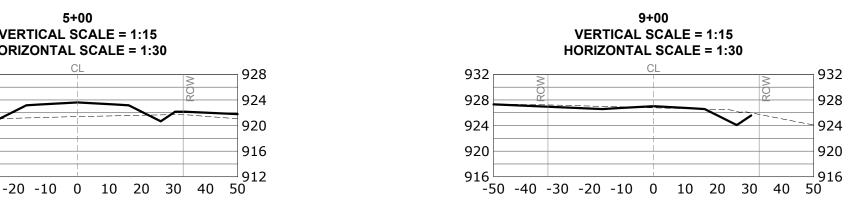





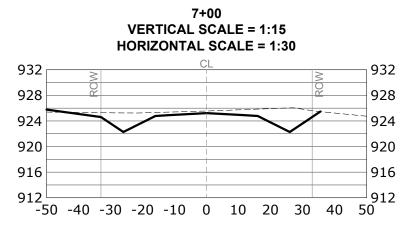



 2
 8
 4
 3
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0
 0</t

PLOWE ENGINEERING, INC.

6776 LAKE DRIVE SUITE 110 LINO LAKES, MN 55014

PHONE: (651) 361-8210 FAX: (651) 361-8701

DRAWN BY: CHECK BY CWP

JOB NO: DATE: 22-2076 11/16/22

HIDDEN PRAIRIE
CITY OF EAST BETHEL, MINNESOTA
CROSS-SECTIONS

SHEET


928

C3.2

			Low Floor		Low Opening		
		Lowest Floor	Determining	Lowest	Determining		
Lot	Block	Elevation	Factor	Opening	Factor	HWL	
1	1	916.9	Tradewell Boring	916.9	3-feet above	913.9	
			#1		100-year B-B	(B-B)	
			(Mottles: 910.7)		HWL of	Pond A	
					Pond A		
					916.9		
2	1	916.9	Tradewell Boring	916.9	3-feet above	913.9	
			#2		100-year B-B	(B-B)	
			(Mottles: 912.0)		HWL of	Pond A	
					Pond A		
	<u> </u>				916.9		
3	1	917.5	Tradewell Boring	917.5	Street EOF		
	<u> </u>		#3		916.5		
			(Mottles: 914.0)				
	1	017.5	A have aviating	017.5	Street EOF	914.1	
4	 	917.5	Above existing	917.5	916.5	Basin B	
			ground		910.5	DaSIII D	
	<u> </u>						
5	1	914.6	Tradewell Boring	917.8	Street EOF	914.1	
<u> </u>	<u> </u>	914.0	#5	917.0	916.5	Basin B	
	1		#5 (Mottles: 911.6)		910.0	ם ווופטע	
			(IVIOLLIGG, 911.0)		+		
6	1	916.4	Tradewell Boring	919.6	Street EOF	914.1	
	 	310.4	#108	313.0	916.5	Basin B	
	 		(Mottles: 913.4)		0.10.0	Duoin D	
			(
7	1	920.0	Tradewell Boring	920.0	Street EOF		
	1		#109		916.5		
	1		(Mottles: 916.9)				
			,				
8	1	922.0	Tradewell Boring	922.0			
			#12				
			(No mottles to				
	1		914.6)				
9	1	920.8	Tradewell Boring	920.8			
			#16				
			(No mottles to				
			914.6 - follows				
			922 contour)				
10	1	922.4	Tradewell Boring	922.4			
			#16				
			(No mottles to				
			914.6)				
11	1	918.7	Tradewell Boring	918.7			
			#16				
			(No mottles to				
			914.6)				
12	1	918.7	Tradewell Boring	918.7			
			#16				
	<u> </u>		(No mottles to				
40		047.0	914.6)	047.0			
13	1	917.6	Tradewell Boring	917.6			
	-		#16				
			(No mottles to 914.6)		+		
14	1 4	920.3	,	020.2	Posin C FOF	913.0	
14	1	9∠0.3	Tradewell Boring #7	920.3	Basin C EOF 912.5	Basin C	
	-		(No mottles to		312.3	ט ווופטע	
	1		914.5 - follows		+		
			920 contour)				
15	1	919.8	Above existing	923.0	Basin C EOF	913.0	
10	 	0.10.0	ground	525.0	912.5	Basin C	
	1		ground		012.0	240110	
	1				+		
16	1	918.4	Tradewell Boring	918.4	Basin C EOF	913.0	
	 	0.0	#107	510.⊣	912.5	Basin C	
	 		(Mottles: 915.4)		012.0	2401110	
			()		+		
17	1	915.6	Above existing	915.6	Basin C EOF	913.0	
	 	1	ground		912.5	Basin C	
	+	+	J		+ -		

- 1. MARK-OFF BASIN AREA (E.G. FENCING, SILT FENCE, ETC.) TO PREVENT
- CONSTRUCTION TRAFFIC FROM ENTERING BASIN AREA.
- 2. USE LOW-IMPACT, EARTH MOVING EQUIPMENT (WIDE TRACK OR MARSH TRACK EQUIPMENT, OR LIGHT-EQUIPMENT WITH TURF-TYPE TIRES) WITHIN BASIN.
- 3. PROTECT BASIN FROM RUN-OFF DURING CONSTRUCTION ACTIVITIES 4. DO NOT EXCAVATE BASIN TO FINAL GRADE UNTIL UPSTREAM DRAINAGE AREAS HAVE
- BEEN STABILIZED. 5. REMOVE ANY TOPSOIL AND/OR UNSUITABLE SOILS WITHIN INFILTRATION BASIN
- FOOTPRINT. ANY SEDIMENT THAT IS WASHED INTO THE BASIN SHALL BE REMOVED. 6. NO MINING OF SANDY SOILS ALLOWED IN BASIN AREA.
- 7. EXCAVATE BASIN TO FINAL GRADE ONLY UPON STABILIZATION OF CONTRIBUTING DRAINAGE AREAS. ALLEVIATE ANY COMPACTED SOILS DUE TO FINAL GRADING OPERATIONS PRIOR TO SEEDING.

AFTER INFILTRATION BASIN AREA HAS BEEN EXCAVATED TO FINAL GRADE, PERFORM A DOUBLE-RING INFILTROMETER TEST(S) TO VERIFY INFILTRATION CAPACITY OF IN-SITU SOILS.

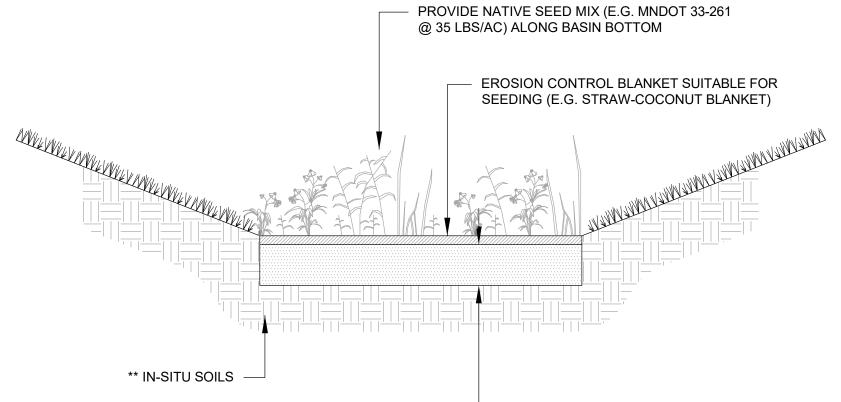

** ALLEVIATE ANY COMPACTED SOILS (BY USING A PRIMARY TILLING OPERATION SUCH AS A CHISEL PLOW, RIPPER OR SUBSOILER) TO A DEPTH NECESSARY TO ALLEVIATE COMPACTION

— (1) REMOVE ANY EXISTING TOPSOIL OR FILL DEEMED UNSUITABLE FOR INFILTRATION (GEOTECHNICAL ENGINEER TO REVIEW ON-SITE SOILS)

(2) IN AREAS OF FILL, PLACE SALVAGED ON-SITE SANDY SOILS SUITABLE FOR INFILTRATION WITH <5% FINES (AS DETERMINED BY GEOTECHNICAL ENGINEER)

BASIN C OVERFLOW

10 FT

CLASS III RIP-RAP W/ GEOTEXTILE FILTER FABRIC


912.5 (MIN.) 913.0 (PLAN)

912.0


SIDE SLOPES


N.T.S.

10 FT



INFILTRATION BASIN

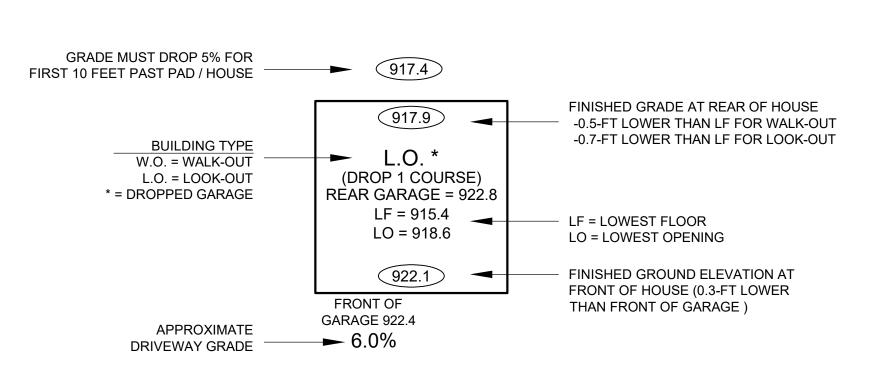

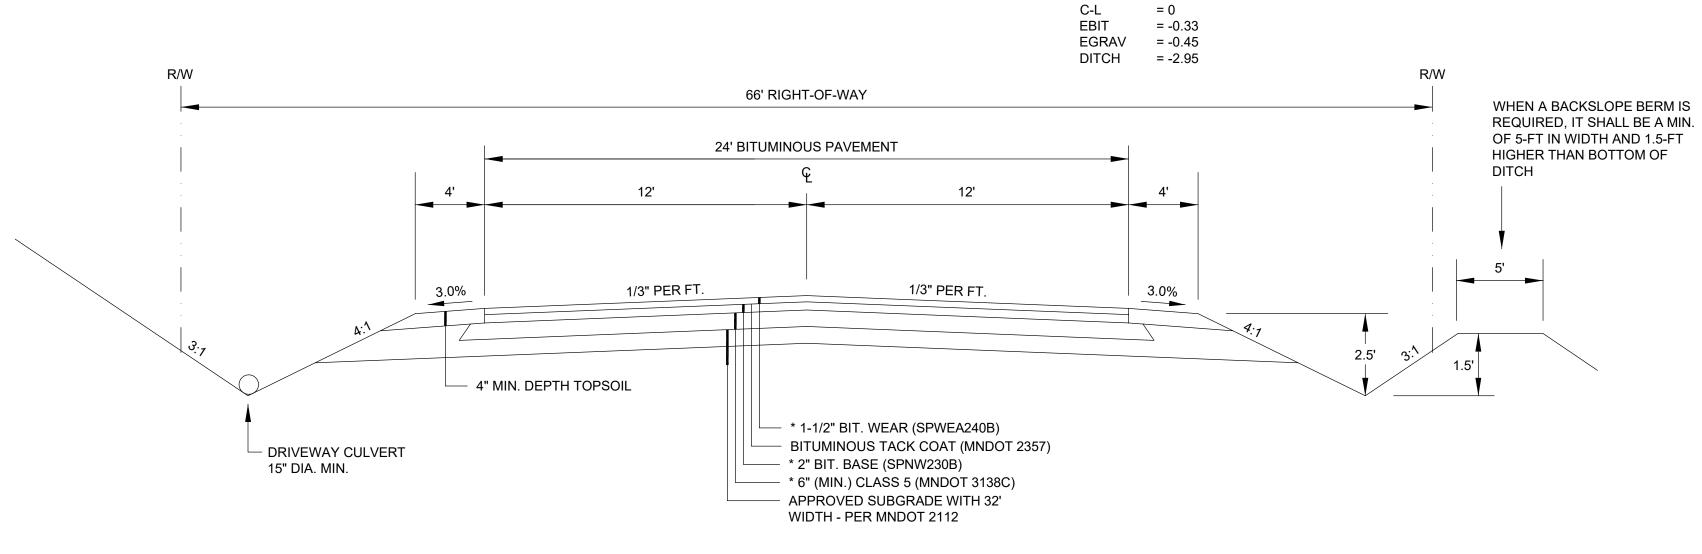

* SUBJECT TO REVIEW BY QUALIFIED SOILS ENGINEER

LOCAL RESIDENTIAL RURAL STREET SECTION - 10 TON

& ENGINEERING

PLOWE ENGINEERING, INC.

SUITE 110 LINO LAKES, MN 55014 PHONE: (651) 361-8210

6776 LAKE DRIVE

FAX: (651) 361-8701


DRAWN BY: CHECK BY CWP JOB NO: DATE: 22-2076 11/16/22


 2
 8
 7
 8


PRAIRIE THEL, MINNESOTA LOT TABLE HIDDEN I CITY OF EAST BET DETAILS & I


SHEET


C4.1

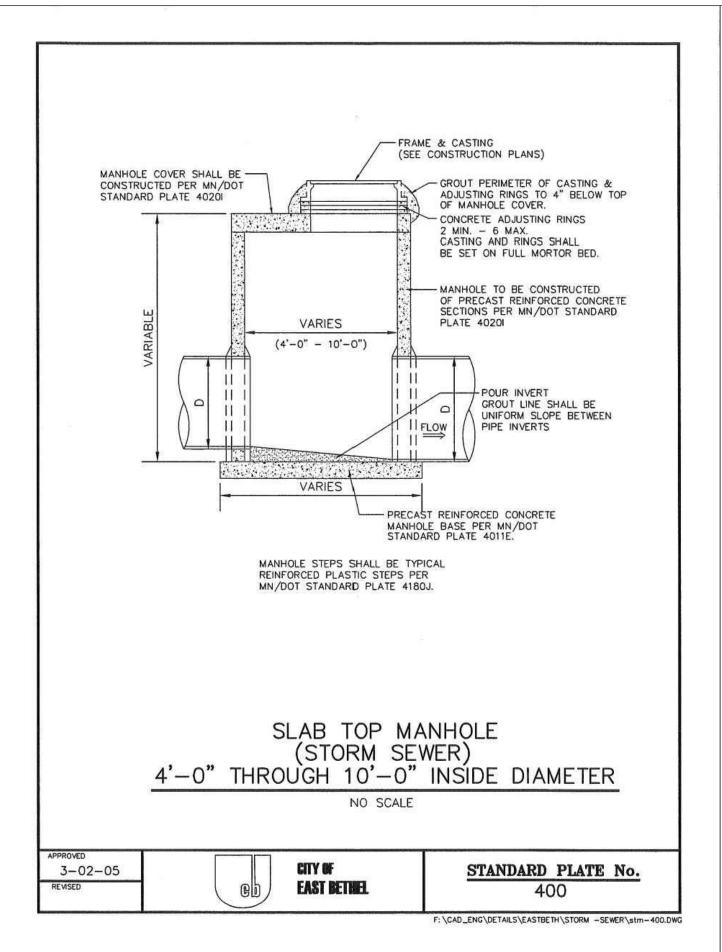


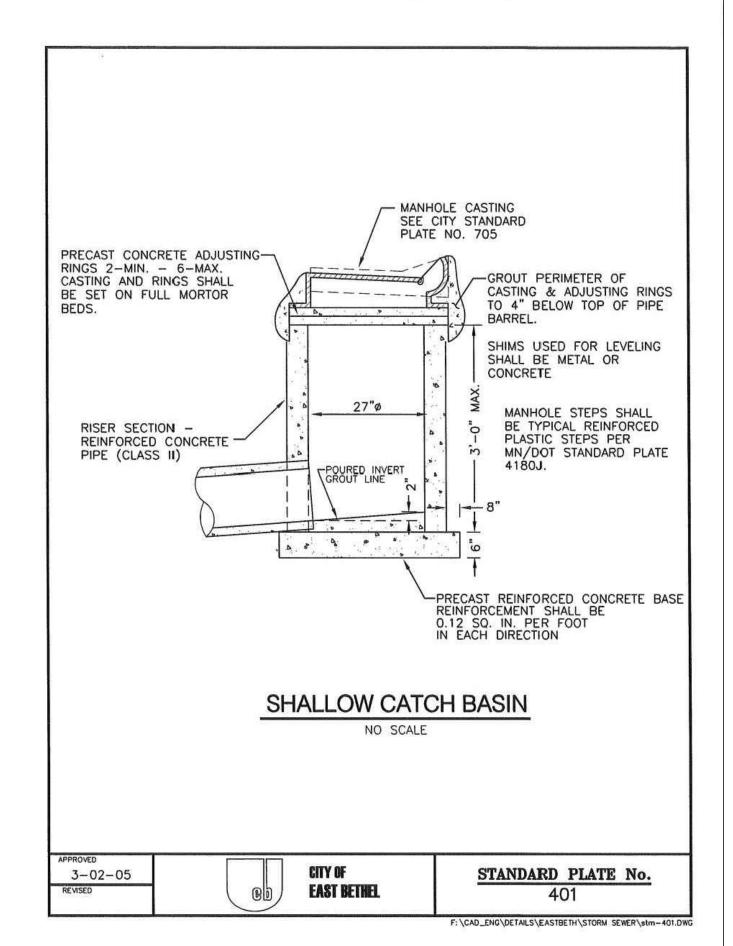


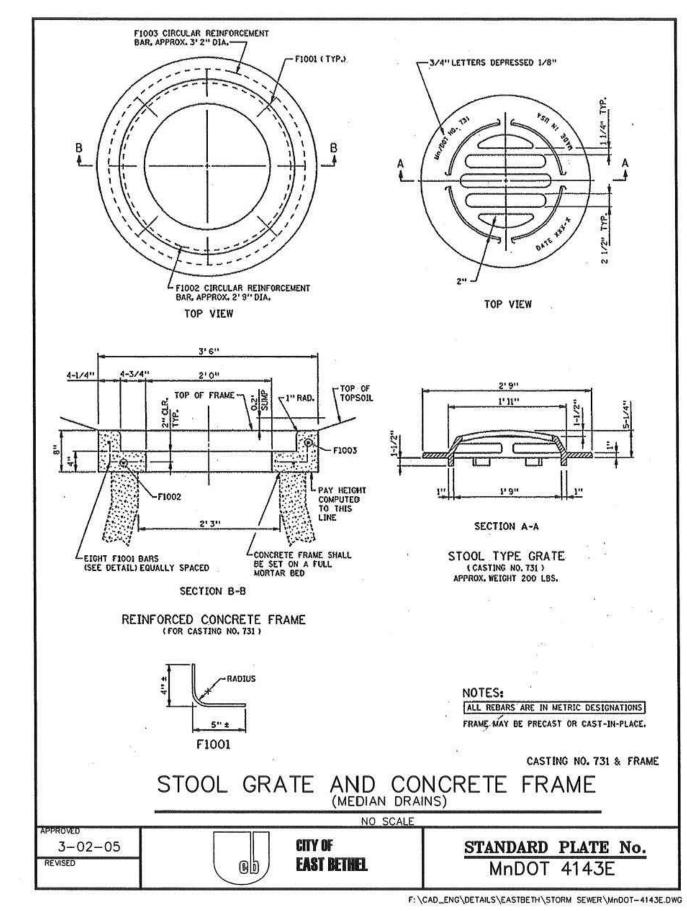


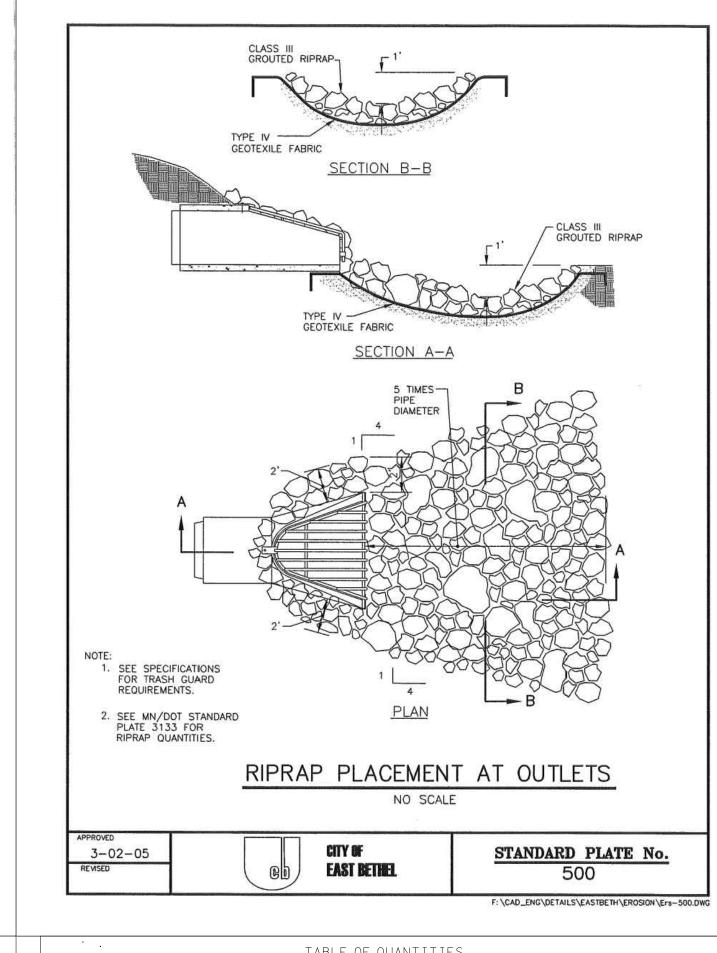


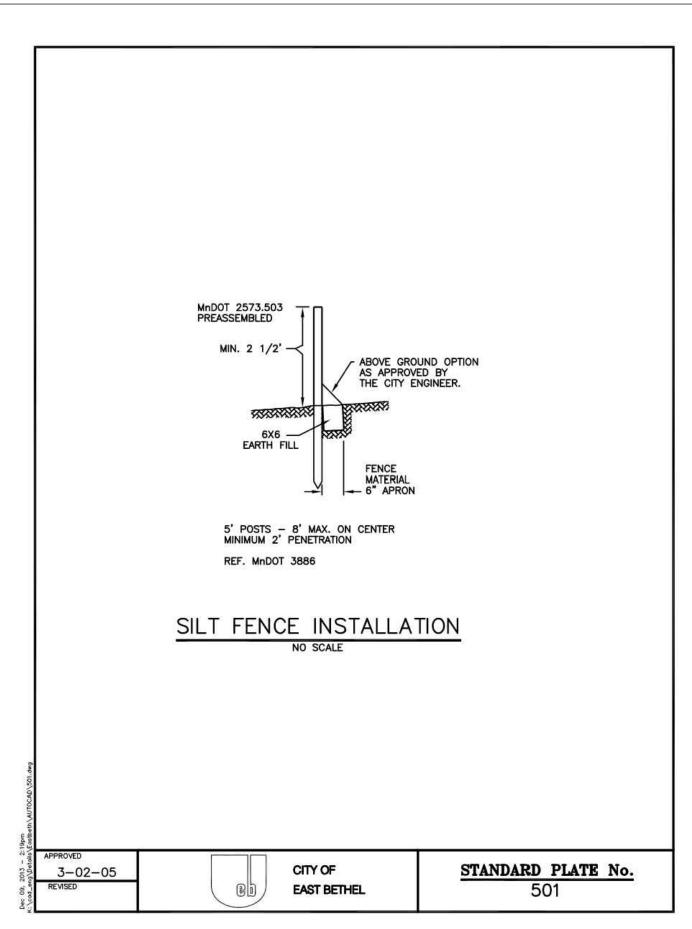

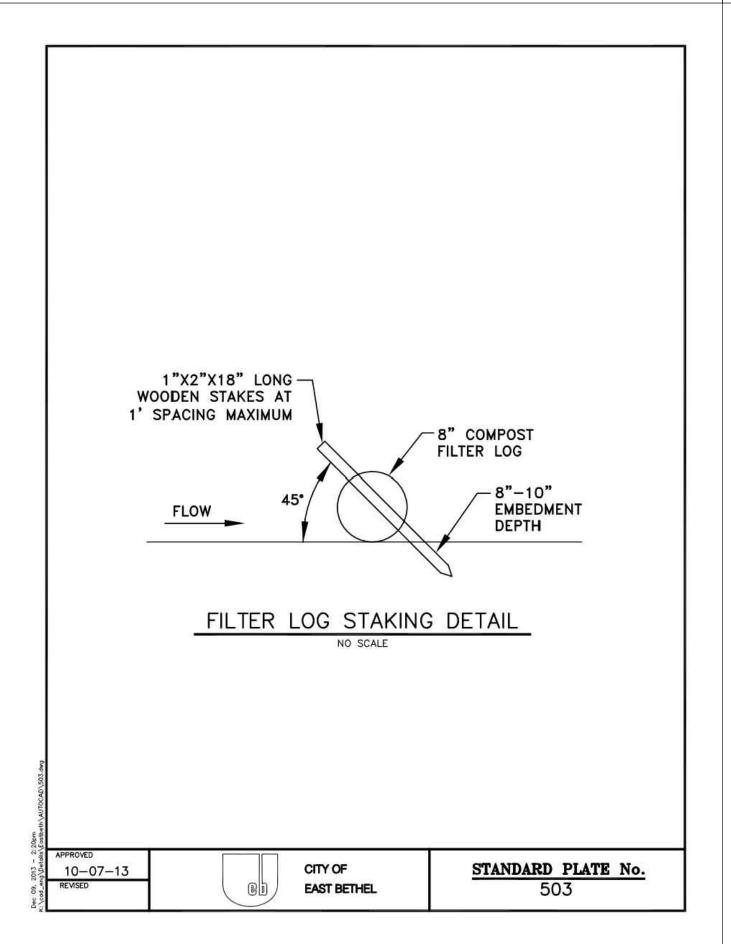

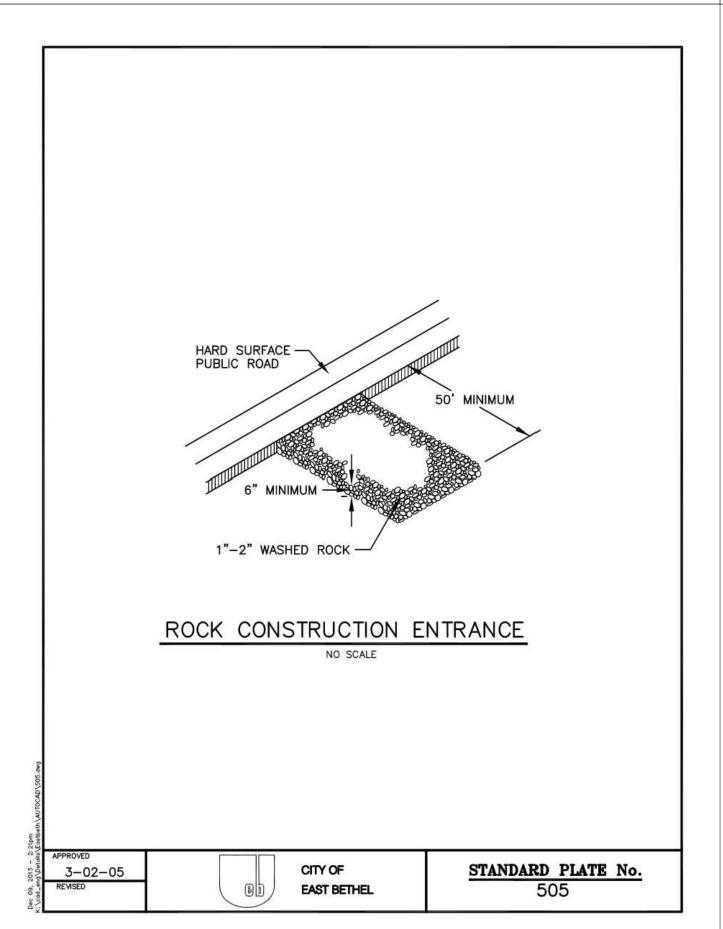

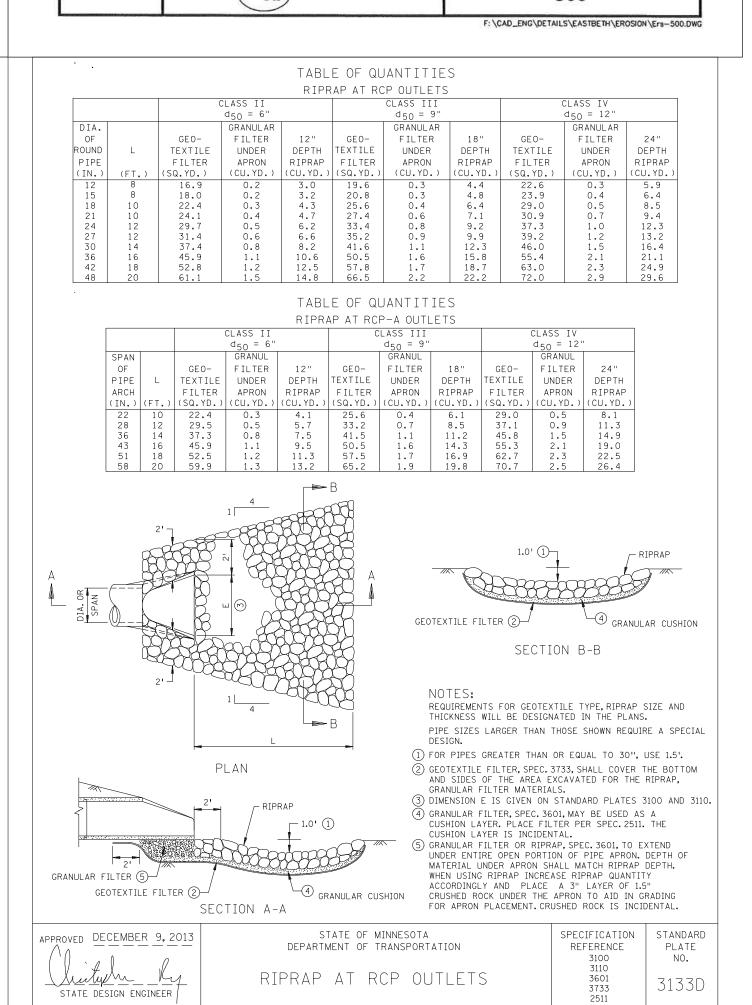

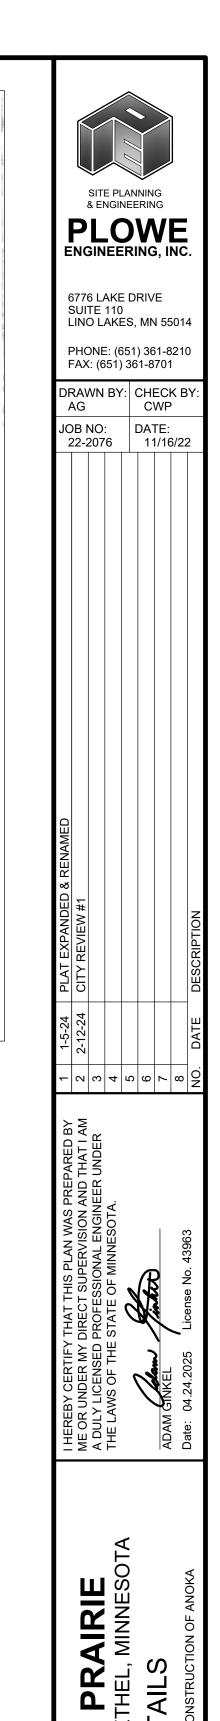

HIDDEN PRAIF
CITY OF EAST BETHEL, MIN
DETAILS

C4.2

SHEET

4.1 TERMINATION OF COVERAGE. [MINN. R. 7090]

4.2 PERMITTEES MUST SUBMIT A NOT WITHIN 30 DAYS AFTER ALL TERMINATION CONDITIONS LISTED IN SECTION 13 ARE COMPLETE, [MINN, R. 7090]

4.3 PERMITTEES MUST SUBMIT A NOT WITHIN 30 DAYS AFTER SELLING OR OTHERWISE LEGALLY TRANSFERRING THE ENTIRE SITE, INCLUDING PERMIT RESPONSIBILITY FOR ROADS (E.G., STREET SWEEPING) AND STORMWATER INFRASTRUCTURE FINAL CLEAN OUT, OR TRANSFERRING PORTIONS OF A SITE TO ANOTHER PARTY. THE PERMITTEES' COVERAGE UNDER THIS PERMIT TERMINATES AT MIDNIGHT ON THE SUBMISSION DATE OF THE NOT. [MINN. R. 7090]

4.4 PERMITTEES MAY TERMINATE PERMIT COVERAGE PRIOR TO COMPLETION OF ALL CONSTRUCTION ACTIVITY IF THEY MEET ALL OF THE FOLLOWING CONDITIONS:

A. CONSTRUCTION ACTIVITY HAS CEASED FOR AT LEAST 90 DAYS; AND

B. AT LEAST 90 PERCENT (BY AREA) OF ALL ORIGINALLY PROPOSED CONSTRUCTION ACTIVITY HAS BEEN COMPLETED AND PERMANENT COVER HAS BEEN ESTABLISHED ON THOSE AREAS; AND

C. ON AREAS WHERE CONSTRUCTION ACTIVITY IS NOT COMPLETE, PERMANENT COVER HAS BEEN ESTABLISHED; AND D. THE SITE COMPLIES WITH ITEM 13.3 THROUGH 13.7.

AFTER PERMIT COVERAGE IS TERMINATED UNDER THIS ITEM, ANY SUBSEQUENT DEVELOPMENT ON THE REMAINING PORTIONS OF THE SITE WILL REQUIRE PERMIT COVERAGE IF THE SUBSEQUENT DEVELOPMENT ITSELF OR AS PART OF THE REMAINING COMMON PLAN OF DEVELOPMENT OR SALE WILL RESULT IN LAND DISTURBING ACTIVITIES OF ONE (1) OR MORE ACRES IN

4.5 PERMITTEES MAY TERMINATE COVERAGE UPON MPCA APPROVAL AFTER SUBMITTING INFORMATION DOCUMENTING THE OWNER CANCELED THE PROJECT. [MINN. R. 7090]

6.1 SWPPP AMENDMENTS. [MINN. R. 7090]

6.2 ONE OF THE INDIVIDUALS DESCRIBED IN ITEM 21.2.A OR ITEM 21.2.B OR ANOTHER QUALIFIED INDIVIDUAL MUST COMPLETE ALL SWPPP CHANGES. CHANGES INVOLVING THE USE OF A LESS STRINGENT BMP MUST INCLUDE A JUSTIFICATION DESCRIBING HOW THE REPLACEMENT BMP IS EFFECTIVE FOR THE SITE CHARACTERISTICS. [MINN. R. 7090] 6.3 PERMITTEES MUST AMEND THE SWPPP TO INCLUDE ADDITIONAL OR MODIFIED BMPS AS NECESSARY TO CORRECT PROBLEMS IDENTIFIED OR ADDRESS SITUATIONS WHENEVER THERE IS A CHANGE IN DESIGN, CONSTRUCTION, OPERATION, MAINTENANCE, WEATHER OR SEASONAL CONDITIONS HAVING A SIGNIFICANT EFFECT ON THE DISCHARGE OF POLLUTANTS TO SURFACE WATERS OR GROUNDWATER. [MINN. R. 7090]

6.4 PERMITTEES MUST AMEND THE SWPPP TO INCLUDE ADDITIONAL OR MODIFIED BMPS AS NECESSARY TO CORRECT PROBLEMS IDENTIFIED OR ADDRESS SITUATIONS WHENEVER INSPECTIONS OR INVESTIGATIONS BY THE SITE OWNER OR OPERATOR, USEPA OR MPCA OFFICIALS INDICATE THE SWPPP IS NOT EFFECTIVE IN ELIMINATING OR SIGNIFICANTLY MINIMIZING THE DISCHARGE OF POLLUTANTS TO SURFACE WATERS OR GROUNDWATER OR THE DISCHARGES ARE CAUSING WATER QUALITY STANDARD EXCEEDANCES (E.G., NUISANCE CONDITIONS AS DEFINED IN MINN. R. 7050.0210, SUBP. 2) OR THE SWPPP IS NOT CONSISTENT WITH THE OBJECTIVES OF A USEPA APPROVED TMDL. [MINN. R. 7050.0210]

7.1 BMP SELECTION AND INSTALLATION. [MINN. R. 7090]

7.2 PERMITTEES MUST SELECT, INSTALL, AND MAINTAIN THE BMPS IDENTIFIED IN THE SWPPP AND IN THIS PERMIT IN AN APPROPRIATE AND FUNCTIONAL MANNER AND IN ACCORDANCE WITH RELEVANT MANUFACTURER SPECIFICATIONS AND ACCEPTED ENGINEERING PRACTICES. [MINN. R. 7090]

8.1 EROSION PREVENTION PRACTICES. [MINN. R. 7090]

8.2 BEFORE WORK BEGINS, PERMITTEES MUST DELINEATE THE LOCATION OF AREAS NOT TO BE DISTURBED. [MINN. R. 7090] 8.3 PERMITTEES MUST MINIMIZE THE NEED FOR DISTURBANCE OF PORTIONS OF THE PROJECT WITH STEEP SLOPES. WHEN STEEP SLOPES MUST BE DISTURBED, PERMITTEES MUST USE TECHNIQUES SUCH AS PHASING AND STABILIZATION PRACTICES DESIGNED FOR STEEP SLOPES (E.G., SLOPE DRAINING AND TERRACING), [MINN, R. 7090]

8.4 PERMITTEES MUST STABILIZE ALL EXPOSED SOIL AREAS, INCLUDING STOCKPILES. STABILIZATION MUST BE INITIATED IMMEDIATELY TO LIMIT SOIL EROSION WHEN CONSTRUCTION ACTIVITY HAS PERMANENTLY OR TEMPORARILY CEASED ON ANY PORTION OF THE SITE AND WILL NOT RESUME FOR A PERIOD EXCEEDING 14 CALENDAR DAYS. STABILIZATION MUST BE COMPLETED NO LATER THAN 14 CALENDAR DAYS AFTER THE CONSTRUCTION ACTIVITY HAS CEASED. STABILIZATION IS NOT REQUIRED ON CONSTRUCTED BASE COMPONENTS OF ROADS, PARKING LOTS AND SIMILAR SURFACES. STABILIZATION IS NOT REQUIRED ON TEMPORARY STOCKPILES WITHOUT SIGNIFICANT SILT, CLAY OR ORGANIC COMPONENTS (E.G., CLEAN AGGREGATE STOCKPILES, DEMOLITION CONCRETE STOCKPILES, SAND STOCKPILES) BUT PERMITTEES MUST PROVIDE SEDIMENT CONTROLS AT THE BASE OF THE STOCKPILE. [MINN. R. 7090]

8.5 FOR PUBLIC WATERS THAT THE MINNESOTA DNR HAS PROMULGATED "WORK IN WATER RESTRICTIONS" DURING SPECIFIED FISH SPAWNING TIME FRAMES, PERMITTEES MUST COMPLETE STABILIZATION OF ALL EXPOSED SOIL AREAS WITHIN 200 FEET OF THE WATER'S EDGE, AND THAT DRAIN TO THESE WATERS, WITHIN 24 HOURS DURING THE RESTRICTION PERIOD.

8.6 PERMITTEES MUST STABILIZE THE NORMAL WETTED PERIMETER OF THE LAST 200 LINEAR FEET OF TEMPORARY OR PERMANENT DRAINAGE DITCHES OR SWALES THAT DRAIN WATER FROM THE SITE WITHIN 24 HOURS AFTER CONNECTING TO A SURFACE WATER OR PROPERTY EDGE. PERMITTEES MUST COMPLETE STABILIZATION OF REMAINING PORTIONS OF TEMPORARY OR PERMANENT DITCHES OR SWALES WITHIN 14 CALENDAR DAYS AFTER CONNECTING TO A SURFACE WATER OR PROPERTY EDGE AND CONSTRUCTION IN THAT PORTION OF THE DITCH TEMPORARILY OR PERMANENTLY CEASES. [MINN. R.

8.7 TEMPORARY OR PERMANENT DITCHES OR SWALES BEING USED AS A SEDIMENT CONTAINMENT SYSTEM DURING CONSTRUCTION (WITH PROPERLY DESIGNED ROCK-DITCH CHECKS, BIO ROLLS, SILT DIKES, ETC.) DO NOT NEED TO BE STABILIZED. PERMITTEES MUST STABILIZE THESE AREAS WITHIN 24 HOURS AFTER THEIR USE AS A SEDIMENT CONTAINMENT SYSTEM CEASES. [MINN. R. 7090]

8.8 PERMITTEES MUST NOT USE MULCH, HYDROMULCH, TACKIFIER, POLYACRYLAMIDE OR SIMILAR EROSION PREVENTION PRACTICES WITHIN ANY PORTION OF THE NORMAL WETTED PERIMETER OF A TEMPORARY OR PERMANENT DRAINAGE DITCH OR SWALE SECTION WITH A CONTINUOUS SLOPE OF GREATER THAN 2 PERCENT. [MINN. R. 7090]

8.9 PERMITTEES MUST PROVIDE TEMPORARY OR PERMANENT ENERGY DISSIPATION AT ALL PIPE OUTLETS WITHIN 24 HOURS AFTER CONNECTION TO A SURFACE WATER OR PERMANENT STORMWATER TREATMENT SYSTEM. [MINN. R. 7090] 8.10 PERMITTEES MUST NOT DISTURB MORE LAND (I.E., PHASING) THAN CAN BE EFFECTIVELY INSPECTED AND MAINTAINED IN ACCORDANCE WITH SECTION 11. [MINN. R. 7090]

9.1 SEDIMENT CONTROL PRACTICES. [MINN. R. 7090]

S ON ALL DOWNEDADIENT DEDIMETEDS OF THE SITE AND DOWNGRADIENT AREAS OF THE SITE THAT DRAIN TO ANY SURFACE WATER, INCLUDING CURB AND GUTTER SYSTEMS PERMITTEES MUST LOCATE SEDIMENT CONTROL PRACTICES UPGRADIENT OF ANY BUFFER ZONES. PERMITTEES MUST INSTALL SEDIMENT CONTROL PRACTICES BEFORE ANY UPGRADIENT LAND-DISTURBING ACTIVITIES BEGIN AND MUST KEEP THE SEDIMENT CONTROL PRACTICES IN PLACE UNTIL THEY ESTABLISH PERMANENT COVER. [MINN. R. 7090] 9.3 IF DOWNGRADIENT SEDIMENT CONTROLS ARE OVERLOADED, BASED ON FREQUENT FAILURE OR EXCESSIVE MAINTENANCE REQUIREMENTS, PERMITTEES MUST INSTALL ADDITIONAL UPGRADIENT SEDIMENT CONTROL PRACTICES OR REDUNDANT BMPS TO ELIMINATE THE OVERLOADING AND AMEND THE SWPPP TO IDENTIFY THESE ADDITIONAL PRACTICES AS REQUIRED IN ITEM

6.3. [MINN. R. 7090] 9.4 TEMPORARY OR PERMANENT DRAINAGE DITCHES AND SEDIMENT BASINS DESIGNED AS PART OF A SEDIMENT CONTAINMENT SYSTEM (E.G., DITCHES WITH ROCK-CHECK DAMS) REQUIRE SEDIMENT CONTROL PRACTICES ONLY AS

UPLAND PERIMETER CONTROL PRACTICE IF EXPOSED SOILS STILL DRAIN TO A SURFACE WATER. [MINN. R. 7090]

APPROPRIATE FOR SITE CONDITIONS. [MINN. R. 7090] 9.5 A FLOATING SILT CURTAIN PLACED IN THE WATER IS NOT A SEDIMENT CONTROL BMP TO SATISFY ITEM 9.2 EXCEPT WHEN WORKING ON A SHORELINE OR BELOW THE WATERLINE. IMMEDIATELY AFTER THE SHORT TERM CONSTRUCTION ACTIVITY (F.G., INSTALLATION OF RIP RAP ALONG THE SHORELINE) IN THAT AREA IS COMPLETE, PERMITTEES MUST INSTALL AN

9.6 PERMITTEES MUST RE-INSTALL ALL SEDIMENT CONTROL PRACTICES ADJUSTED OR REMOVED TO ACCOMMODATE SHORT-TERM ACTIVITIES SUCH AS CLEARING OR GRUBBING, OR PASSAGE OF VEHICLES, IMMEDIATELY AFTER THE SHORT-TERM ACTIVITY IS COMPLETED. PERMITTEES MUST RE-INSTALL SEDIMENT CONTROL PRACTICES BEFORE THE NEXT PRECIPITATION EVENT EVEN IF THE SHORT-TERM ACTIVITY IS NOT COMPLETE. [MINN. R. 7090]

9.7 PERMITTEES MUST PROTECT ALL STORM DRAIN INLETS USING APPROPRIATE BMPS DURING CONSTRUCTION UNTIL THEY ESTABLISH PERMANENT COVER ON ALL AREAS WITH POTENTIAL FOR DISCHARGING TO THE INLET. [MINN. R. 7090] 9.8 PERMITTEES MAY REMOVE INLET PROTECTION FOR A PARTICULAR INLET IF A SPECIFIC SAFETY CONCERN (E.G. STREET FLOODING/FREEZING) IS IDENTIFIED BY THE PERMITTEES OR THE JURISDICTIONAL AUTHORITY (E.G. CITY/COUNTY/TOWNSHIP/MINNESOTA DEPARTMENT OF TRANSPORTATION ENGINEER). PERMITTEES MUST DOCUMENT THE NEED FOR REMOVAL IN THE SWPPP. [MINN. R. 7090]

9.9 PERMITTEES MUST PROVIDE SILT FENCE OR OTHER EFFECTIVE SEDIMENT CONTROLS AT THE BASE OF STOCKPILES ON THE DOWNGRADIENT PERIMETER. [MINN. R. 7090] 9.10 PERMITTEES MUST LOCATE STOCKPILES OUTSIDE OF NATURAL BUFFERS OR SURFACE WATERS, INCLUDING STORMWATER

CONVEYANCES SUCH AS CURB AND GUTTER SYSTEMS UNLESS THERE IS A BYPASS IN PLACE FOR THE STORMWATER. [MINN. R. 9.11 PERMITTEES MUST INSTALL A VEHICLE TRACKING BMP TO MINIMIZE THE TRACK OUT OF SEDIMENT FROM THE

CONSTRUCTION SITE OR ONTO PAVED ROADS WITHIN THE SITE, [MINN, R. 7090] 9.12 PERMITTEES MUST USE STREET SWEEPING IF VEHICLE TRACKING BMPS ARE NOT ADEQUATE TO PREVENT SEDIMENT

TRACKING ONTO THE STREET. [MINN. R. 7090] 9.13 PERMITTEES MUST INSTALL TEMPORARY SEDIMENT BASINS AS REQUIRED IN SECTION 14. [MINN. R. 7090]

9.14 IN ANY AREAS OF THE SITE WHERE FINAL VEGETATIVE STABILIZATION WILL OCCUR, PERMITTEES MUST RESTRICT VEHICLE AND EQUIPMENT USE TO MINIMIZE SOIL COMPACTION. [MINN. R. 7090]

9.15 PERMITTEES MUST PRESERVE TOPSOIL ON THE SITE, UNLESS INFEASIBLE. [MINN. R. 7090] 9.16 PERMITTEES MUST DIRECT DISCHARGES FROM BMPS TO VEGETATED AREAS UNLESS INFEASIBLE. [MINN. R. 7090]

9.17 PERMITTEES MUST PRESERVE A 50 FOOT NATURAL BUFFER OR, IF A BUFFER IS INFEASIBLE ON THE SITE, PROVIDE REDUNDANT (DOUBLE) PERIMETER SEDIMENT CONTROLS WHEN A SURFACE WATER IS LOCATED WITHIN 50 FEET OF THE PROJECT'S EARTH DISTURBANCES AND STORMWATER FLOWS TO THE SURFACE WATER. PERMITTEES MUST INSTALL PERIMETER SEDIMENT CONTROLS AT LEAST 5 FEET APART UNLESS LIMITED BY LACK OF AVAILABLE SPACE. NATURAL BUFFERS ARE NOT REQUIRED ADJACENT TO ROAD DITCHES, JUDICIAL DITCHES, COUNTY DITCHES, STORMWATER CONVEYANCE CHANNELS, STORM DRAIN INLETS, AND SEDIMENT BASINS. IF PRESERVING THE BUFFER IS INFEASIBLE, PERMITTEES MUST DOCUMENT THE REASONS IN THE SWPPP. SHEET PILING IS A REDUNDANT PERIMETER CONTROL IF INSTALLED IN A MANNER

THAT RETAINS ALL STORMWATER. [MINN. R. 7090] 9.18 PERMITTEES MUST USE POLYMERS, FLOCCULANTS, OR OTHER SEDIMENTATION TREATMENT CHEMICALS IN ACCORDANCE WITH ACCEPTED ENGINEERING PRACTICES, DOSING SPECIFICATIONS AND SEDIMENT REMOVAL DESIGN SPECIFICATIONS PROVIDED BY THE MANUFACTURER OR SUPPLIER. THE PERMITTEES MUST USE CONVENTIONAL EROSION AND SEDIMENT CONTROLS PRIOR TO CHEMICAL ADDITION AND MUST DIRECT TREATED STORMWATER TO A SEDIMENT CONTROL SYSTEM FOR FILTRATION OR SETTLEMENT OF THE FLOC PRIOR TO DISCHARGE. [MINN. R. 7090]

10.1 DEWATERING AND BASIN DRAINING. [MINN. R. 7090]

10.2 PERMITTEES MUST DISCHARGE TURBID OR SEDIMENT-LADEN WATERS RELATED TO DEWATERING OR BASIN DRAINING (E.G., PUMPED DISCHARGES, TRENCH/DITCH CUTS FOR DRAINAGE) TO A TEMPORARY OR PERMANENT SEDIMENT BASIN ON THE PROJECT SITE UNLESS INFEASIBLE. PERMITTEES MAY DEWATER TO SURFACE WATERS IF THEY VISUALLY CHECK TO ENSURE ADEQUATE TREATMENT HAS BEEN OBTAINED AND NUISANCE CONDITIONS (SEE MINN. R. 7050.0210, SUBP. 2) WILL NOT RESULT FROM THE DISCHARGE. IF PERMITTEES CANNOT DISCHARGE THE WATER TO A SEDIMENTATION BASIN PRIOR TO ENTERING A SURFACE WATER, PERMITTEES MUST TREAT IT WITH APPROPRIATE BMPS SUCH THAT THE DISCHARGE DOES NOT ADVERSELY AFFECT THE SURFACE WATER OR DOWNSTREAM PROPERTIES. [MINN. R. 7050.0210]

SUITABLE FILTRATION DEVICE (E.G., CARTRIDGE FILTERS, ABSORBENTS PADS) PRIOR TO DISCHARGE. [MINN. R. 7090] 10.4 PERMITTEES MUST DISCHARGE ALL WATER FROM DEWATERING OR BASIN-DRAINING ACTIVITIES IN A MANNER THAT DOES NOT CAUSE EROSION OR SCOUR IN THE IMMEDIATE VICINITY OF DISCHARGE POINTS OR INUNDATION OF WETLANDS IN THE IMMEDIATE VICINITY OF DISCHARGE POINTS THAT CAUSES SIGNIFICANT ADVERSE IMPACT TO THE WETLAND. [MINN. R.

10.3 IF PERMITTEES MUST DISCHARGE WATER CONTAINING OIL OR GREASE, THEY MUST USE AN OIL-WATER SEPARATOR OR

10.5 IF PERMITTEES USE FILTERS WITH BACKWASH WATER, THEY MUST HAUL THE BACKWASH WATER AWAY FOR DISPOSAL, RETURN THE BACKWASH WATER TO THE BEGINNING OF THE TREATMENT PROCESS, OR INCORPORATE THE BACKWASH WATER INTO THE SITE IN A MANNER THAT DOES NOT CAUSE EROSION. [MINN. R. 7090]

11.1 INSPECTIONS AND MAINTENANCE. [MINN. R. 7090]

11.2 PERMITTEES MUST ENSURE A TRAINED PERSON, AS IDENTIFIED IN ITEM 21.2.B, WILL INSPECT THE ENTIRE CONSTRUCTION SITE AT LEAST ONCE EVERY SEVEN (7) DAYS DURING ACTIVE CONSTRUCTION AND WITHIN 24 HOURS AFTER A RAINFALL EVENT GREATER THAN 1/2 INCH IN 24 HOURS. [MINN. R. 7090]

11.3 PERMITTEES MUST INSPECT AND MAINTAIN ALL PERMANENT STORMWATER TREATMENT BMPS. [MINN. R. 7090] 11.4 PERMITTEES MUST INSPECT ALL EROSION PREVENTION AND SEDIMENT CONTROL BMPS AND POLLUTION PREVENTION MANAGEMENT MEASURES TO ENSURE INTEGRITY AND EFFECTIVENESS. PERMITTEES MUST REPAIR. REPLACE OR SUPPLEMENT ALL NONFUNCTIONAL BMPS WITH FUNCTIONAL BMPS BY THE END OF THE NEXT BUSINESS DAY AFTER DISCOVERY UNLESS ANOTHER TIME FRAME IS SPECIFIED IN ITEM 11.5 OR 11.6. PERMITTEES MAY TAKE ADDITIONAL TIME IF FIELD CONDITIONS PREVENT ACCESS TO THE AREA, [MINN, R. 7090]

11.5 DURING EACH INSPECTION, PERMITTEES MUST INSPECT SURFACE WATERS, INCLUDING DRAINAGE DITCHES AND CONVEYANCE SYSTEMS BUT NOT CURB AND GUTTER SYSTEMS, FOR EVIDENCE OF EROSION AND SEDIMENT DEPOSITION. PERMITTEES MUST REMOVE ALL DELTAS AND SEDIMENT DEPOSITED IN SURFACE WATERS. INCLUDING DRAINAGE WAYS CATCH BASINS, AND OTHER DRAINAGE SYSTEMS AND RESTABILIZE THE AREAS WHERE SEDIMENT REMOVAL RESULTS IN EXPOSED SOIL, PERMITTEES MUST COMPLETE REMOVAL AND STABILIZATION WITHIN SEVEN (7) CALENDAR DAYS OF DISCOVERY UNLESS PRECLUDED BY LEGAL, REGULATORY, OR PHYSICAL ACCESS CONSTRAINTS, PERMITTEES MUST USE ALI REASONABLE EFFORTS TO OBTAIN ACCESS. IF PRECLUDED, REMOVAL AND STABILIZATION MUST TAKE PLACE WITHIN SEVEN (7) DAYS OF OBTAINING ACCESS. PERMITTEES ARE RESPONSIBLE FOR CONTACTING ALL LOCAL, REGIONAL, STATE AND FEDERAL AUTHORITIES AND RECEIVING ANY APPLICABLE PERMITS, PRIOR TO CONDUCTING ANY WORK IN SURFACE WATERS.

11.6 PERMITTEES MUST INSPECT CONSTRUCTION SITE VEHICLE EXIT LOCATIONS, STREETS AND CURB AND GUTTER SYSTEMS WITHIN AND ADJACENT TO THE PROJECT FOR SEDIMENTATION FROM FROSION OR TRACKED SEDIMENT FROM VEHICLES. PERMITTEES MUST REMOVE SEDIMENT FROM ALL PAVED SURFACES WITHIN ONE (1) CALENDAR DAY OF DISCOVERY OR, IF

APPLICABLE, WITHIN A SHORTER TIME TO AVOID A SAFETY HAZARD TO USERS OF PUBLIC STREETS. [MINN. R. 7090] 11.7 PERMITTEES MUST REPAIR, REPLACE OR SUPPLEMENT ALL PERIMETER CONTROL DEVICES WHEN THEY BECOME NONFUNCTIONAL OR THE SEDIMENT REACHES 1/2 OF THE HEIGHT OF THE DEVICE. [MINN. R. 7090]

11.8 PERMITTEES MUST DRAIN TEMPORARY AND PERMANENT SEDIMENTATION BASINS AND REMOVE THE SEDIMENT WHEN THE DEPTH OF SEDIMENT COLLECTED IN THE BASIN REACHES 1/2 THE STORAGE VOLUME. [MINN. R. 7090] 11.9 PERMITTEES MUST ENSURE THAT AT LEAST ONE INDIVIDUAL PRESENT ON THE SITE (OR AVAILABLE TO THE PROJECT SITE

IN THREE (3) CALENDAR DAYS) IS TRAINED IN THE JOB DUTIES DESCRIBED IN ITEM 21.2.B. [MINN. R. 7090] 11.10 PERMITTEES MAY ADJUST THE INSPECTION SCHEDULE DESCRIBED IN ITEM 11.2 AS FOLLOWS A. INSPECTIONS OF AREAS WITH PERMANENT COVER CAN BE REDUCED TO ONCE PER MONTH, EVEN IF CONSTRUCTION

ACTIVITY CONTINUES ON OTHER PORTIONS OF THE SITE; OR B. WHERE SITES HAVE PERMANENT COVER ON ALL EXPOSED SOIL AND NO CONSTRUCTION ACTIVITY IS OCCURRING ANYWHERE ON THE SITE, INSPECTIONS CAN BE REDUCED TO ONCE PER MONTH AND, AFTER 12 MONTHS, MAY BE SUSPENDED COMPLETELY UNTIL CONSTRUCTION ACTIVITY RESUMES. THE MPCA MAY REQUIRE INSPECTIONS TO RESUME

IF CONDITIONS WARRANT; OR C. WHERE CONSTRUCTION ACTIVITY HAS BEEN SUSPENDED DUE TO FROZEN GROUND CONDITIONS, INSPECTIONS MAY BE SUSPENDED. INSPECTIONS MUST RESUME WITHIN 24 HOURS OF RUNOFF OCCURRING, OR UPON RESUMING

CONSTRUCTION, WHICHEVER COMES FIRST. [MINN. R. 7090] 11.11 PERMITTEES MUST RECORD ALL INSPECTIONS AND MAINTENANCE ACTIVITIES WITHIN 24 HOURS OF BEING CONDUCTED AND THESE RECORDS MUST BE RETAINED WITH THE SWPPP. THESE RECORDS MUST INCLUDE:

A. DATE AND TIME OF INSPECTIONS: AND

B. NAME OF PERSONS CONDUCTING INSPECTIONS; AND

C. ACCURATE FINDINGS OF INSPECTIONS, INCLUDING THE SPECIFIC LOCATION WHERE CORRECTIVE ACTIONS ARE NEEDED;

D. CORRECTIVE ACTIONS TAKEN (INCLUDING DATES, TIMES, AND PARTY COMPLETING MAINTENANCE ACTIVITIES); AND E. DATE OF ALL RAINFALL EVENTS GREATER THAN 1/2 INCHES IN 24 HOURS, AND THE AMOUNT OF RAINFALL FOR EACH EVENT. PERMITTEES MUST OBTAIN RAINFALL AMOUNTS BY EITHER A PROPERLY MAINTAINED RAIN GAUGE INSTALLED ONSITE. A WEATHER STATION THAT IS WITHIN ONE (1) MILE OF YOUR LOCATION, OR A WEATHER REPORTING SYSTEM

THAT PROVIDES SITE SPECIFIC RAINFALL DATA FROM RADAR SUMMARIES; AND F. IF PERMITTEES OBSERVE A DISCHARGE DURING THE INSPECTION, THEY MUST RECORD AND SHOULD PHOTOGRAPH AND DESCRIBE THE LOCATION OF THE DISCHARGE (I.E., COLOR, ODOR, SETTLED OR SUSPENDED SOLIDS, OIL SHEEN, AND OTHER OBVIOUS INDICATORS OF POLLUTANTS); AND

G. ANY AMENDMENTS TO THE SWPPP PROPOSED AS A RESULT OF THE INSPECTION MUST BE DOCUMENTED AS REQUIRED IN SECTION 6 WITHIN SEVEN (7) CALENDAR DAYS. [MINN. R. 7090]

12.1 POLLUTION PREVENTION MANAGEMENT MEASURES. [MINN. R. 7090]

12.2 PERMITTEES MUST PLACE BUILDING PRODUCTS AND LANDSCAPE MATERIALS UNDER COVER (E.G., PLASTIC SHEETING OR TEMPORARY ROOFS) OR PROTECT THEM BY SIMILARLY EFFECTIVE MEANS DESIGNED TO MINIMIZE CONTACT WITH STORMWATER. PERMITTEES ARE NOT REQUIRED TO COVER OR PROTECT PRODUCTS WHICH ARE EITHER NOT A SOURCE OF

12.3 PERMITTEES MUST PLACE PESTICIDES FERTILIZERS AND TREATMENT CHEMICALS LINDER COVER (F.G., PLASTIC SHEETING OR TEMPORARY ROOFS) OR PROTECT THEM BY SIMILARLY EFFECTIVE MEANS DESIGNED TO MINIMIZE CONTACT WITH STORMWATER. [MINN. R. 7090]

12.4 PERMITTEES MUST STORE HAZARDOUS MATERIALS AND TOXIC WASTE, (INCLUDING OIL, DIESEL FUEL, GASOLINE, HYDRAULIC FLUIDS, PAINT SOLVENTS, PETROLEUM-BASED PRODUCTS, WOOD PRESERVATIVES, ADDITIVES, CURING COMPOUNDS, AND ACIDS) IN SEALED CONTAINERS TO PREVENT SPILLS, LEAKS OR OTHER DISCHARGE. STORAGE AND DISPOSAL OF HAZARDOUS WASTE MATERIALS MUST BE IN COMPLIANCE WITH MINN. R. CH. 7045 INCLUDING SECONDARY CONTAINMENT AS APPLICABLE. [MINN. R. 7090]

12.5 PERMITTEES MUST PROPERLY STORE, COLLECT AND DISPOSE SOLID WASTE IN COMPLIANCE WITH MINN. R. CH. 7035. [MINN. R. 7035]

12.6 PERMITTEES MUST POSITION PORTABLE TOILETS SO THEY ARE SECURE AND WILL NOT TIP OR BE KNOCKED OVER. PERMITTEES MUST PROPERLY DISPOSE SANITARY WASTE IN ACCORDANCE WITH MINN. R. CH. 7041. [MINN. R. 7041] 12.7 PERMITTEES MUST TAKE REASONABLE STEPS TO PREVENT THE DISCHARGE OF SPILLED OR LEAKED CHEMICALS.

INCLUDING FUEL, FROM ANY AREA WHERE CHEMICALS OR FUEL WILL BE LOADED OR UNLOADED INCLUDING THE USE OF DRIP PANS OR ABSORBENTS UNLESS INFEASIBLE. PERMITTEES MUST ENSURE ADEQUATE SUPPLIES ARE AVAILABLE AT ALL TIMES TO CLEAN UP DISCHARGED MATERIALS AND THAT AN APPROPRIATE DISPOSAL METHOD IS AVAILABLE FOR RECOVERED. SPILLED MATERIALS. PERMITTEES MUST REPORT AND CLEAN UP SPILLS IMMEDIATELY AS REQUIRED BY MINN. STAT. 115.061, USING DRY CLEAN UP MEASURES WHERE POSSIBLE. [MINN. STAT. 115.061]

12.8 PERMITTEES MUST LIMIT VEHICLE EXTERIOR WASHING AND EQUIPMENT TO A DEFINED AREA OF THE SITE. PERMITTEES MUST CONTAIN RUNOFF FROM THE WASHING AREA IN A SEDIMENT BASIN OR OTHER SIMILARLY EFFECTIVE CONTROLS AND MUST DISPOSE WASTE FROM THE WASHING ACTIVITY PROPERLY. PERMITTEES MUST PROPERLY USE AND STORE SOAPS, DETERGENTS, OR SOLVENTS, [MINN, R. 7090]

12.9 PERMITTEES MUST PROVIDE EFFECTIVE CONTAINMENT FOR ALL LIQUID AND SOLID WASTES GENERATED BY WASHOUT OPERATIONS (E.G., CONCRETE, STUCCO, PAINT, FORM RELEASE OILS, CURING COMPOUNDS AND OTHER CONSTRUCTION MATERIALS) RELATED TO THE CONSTRUCTION ACTIVITY PERMITTEES MUST PREVENT LIQUID AND SOLID WASHOUT WASTES. FROM CONTACTING THE GROUND AND MUST DESIGN THE CONTAINMENT SO IT DOES NOT RESULT IN RUNOFF FROM THE WASHOUT OPERATIONS OR AREAS. PERMITTEES MUST PROPERLY DISPOSE LIQUID AND SOLID WASTES IN COMPLIANCE WITH MPCA RULES. PERMITTEES MUST INSTALL A SIGN INDICATING THE LOCATION OF THE WASHOUT FACILITY. [MINN. R. 7035,

13.1 PERMIT TERMINATION CONDITIONS. [MINN. R. 7090]

13.2 PERMITTEES MUST COMPLETE ALL CONSTRUCTION ACTIVITY AND MUST INSTALL PERMANENT COVER OVER ALL AREAS PRIOR TO SUBMITTING THE NOT. VEGETATIVE COVER MUST CONSIST OF A UNIFORM PERENNIAL VEGETATION WITH A DENSITY OF 70 PERCENT OF ITS EXPECTED FINAL GROWTH. VEGETATION IS NOT REQUIRED WHERE THE FUNCTION OF A SPECIFIC AREA DICTATES NO VEGETATION, SUCH AS IMPERVIOUS SURFACES OR THE BASE OF A SAND FILTER. [MINN. R.

13.3 PERMITTEES MUST CLEAN THE PERMANENT STORMWATER TREATMENT SYSTEM OF ANY ACCUMULATED SEDIMENT AND MUST ENSURE THE SYSTEM MEETS ALL APPLICABLE REQUIREMENTS IN SECTION 15 THROUGH 19 AND IS OPERATING AS

DESIGNED. [MINN. R. 7090] 13.4 PERMITTEES MUST REMOVE ALL SEDIMENT FROM CONVEYANCE SYSTEMS PRIOR TO SUBMITTING THE NOT. [MINN. R.

13.5 PERMITTEES MUST REMOVE ALL TEMPORARY SYNTHETIC EROSION PREVENTION AND SEDIMENT CONTROL BMPS PRIOR TO SUBMITTING THE NOT. PERMITTEES MAY LEAVE BMPS DESIGNED TO DECOMPOSE ON-SITE IN PLACE. [MINN. R. 7090] 13.6 FOR RESIDENTIAL CONSTRUCTION ONLY, PERMIT COVERAGE TERMINATES ON INDIVIDUAL LOTS IF THE STRUCTURES ARE FINISHED AND TEMPORARY EROSION PREVENTION AND DOWNGRADIENT PERIMETER CONTROL IS COMPLETE, THE RESIDENCE SELLS TO THE HOMEOWNER, AND THE PERMITTEE DISTRIBUTES THE MPCA'S "HOMEOWNER FACT SHEET" TO THE

HOMEOWNER, [MINN, R. 7090] 13.7 FOR CONSTRUCTION PROJECTS ON AGRICULTURAL LAND (E.G., PIPELINES ACROSS CROPLAND), PERMITTEES MUST RETURN THE DISTURBED LAND TO ITS PRECONSTRUCTION AGRICULTURAL USE PRIOR TO SUBMITTING THE NOT. [MINN. R.

14.1 TEMPORARY SEDIMENT BASINS. [MINN. R. 7090]

14.2 WHERE TEN (10) OR MORE ACRES OF DISTURBED SOIL DRAIN TO A COMMON LOCATION, PERMITTEES MUST PROVIDE A FEMPORARY SEDIMENT BASIN TO PROVIDE TREATMENT OF THE RUNOFF BEFORE IT LEAVES THE CONSTRUCTION SITE OR ENTERS SURFACE WATERS. PERMITTEES MAY CONVERT A TEMPORARY SEDIMENT BASIN TO A PERMANENT BASIN AFTER CONSTRUCTION IS COMPLETE. THE TEMPORARY BASIN IS NO LONGER REQUIRED WHEN PERMANENT COVER HAS REDUCED THE ACREAGE OF DISTURBED SOIL TO LESS THAN TEN (10) ACRES DRAINING TO A COMMON LOCATION. [MINN. R. 7090]

14.3 THE TEMPORARY BASIN MUST PROVIDE LIVE STORAGE FOR A CALCULATED VOLUME OF RUNOFF FROM A TWO (2)-YEAR. 24-HOUR STORM FROM EACH ACRE DRAINED TO THE BASIN OR 1,800 CUBIC FEET OF LIVE STORAGE PER ACRE DRAINED,

14.4 WHERE PERMITTEES HAVE NOT CALCULATED THE TWO (2)-YEAR, 24-HOUR STORM RUNOFF AMOUNT, THE TEMPORARY BASIN MUST PROVIDE 3,600 CUBIC FEET OF LIVE STORAGE PER ACRE OF THE BASINS' DRAINAGE AREA. [MINN. R. 7090] 14.5 PERMITTEES MUST DESIGN BASIN OUTLETS TO PREVENT SHORT-CIRCUITING AND THE DISCHARGE OF FLOATING DEBRIS.

14.6 PERMITTEES MUST DESIGN THE OUTLET STRUCTURE TO WITHDRAW WATER FROM THE SURFACE TO MINIMIZE THE DISCHARGE OF POLLUTANTS. PERMITTEES MAY TEMPORARILY SUSPEND THE USE OF A SURFACE WITHDRAWAL MECHANISM DURING FROZEN CONDITIONS. THE BASIN MUST INCLUDE A STABILIZED EMERGENCY OVERFLOW TO PREVENT FAILURE OF POND INTEGRITY, [MINN, R. 7090]

14.7 PERMITTEES MUST PROVIDE ENERGY DISSIPATION FOR THE BASIN OUTLET WITHIN 24 HOURS AFTER CONNECTION TO A SURFACE WATER, [MINN, R. 7090]

14.8 PERMITTEES MUST LOCATE TEMPORARY BASINS OUTSIDE OF SURFACE WATERS AND ANY BUFFER ZONE REQUIRED IN 14.9 PERMITTEES MUST CONSTRUCT THE TEMPORARY BASINS PRIOR TO DISTURBING 10 OR MORE ACRES OF SOIL DRAINING

14.10 WHERE A TEMPORARY SEDIMENT BASIN MEETING THE REQUIREMENTS OF ITEM 14.3 THROUGH 14.9 IS INFEASIBLE, PERMITTEES MUST INSTALL EFFECTIVE SEDIMENT CONTROLS SUCH AS SMALLER SEDIMENT BASINS AND/OR SEDIMENT TRAPS, SILT FENCES, VEGETATIVE BUFFER STRIPS OR ANY APPROPRIATE COMBINATION OF MEASURES AS DICTATED BY INDIVIDUAL SITE CONDITIONS. IN DETERMINING WHETHER INSTALLING A SEDIMENT BASIN IS INFEASIBLE, PERMITTEES MUST CONSIDER PUBLIC SAFETY AND MAY CONSIDER FACTORS SUCH AS SITE SOILS, SLOPE, AND AVAILABLE AREA ON-SITE. PERMITTEES

15.1 PERMANENT STORMWATER TREATMENT SYSTEM. [MINN. R. 7090]

MUST DOCUMENT THIS DETERMINATION OF INFEASIBILITY IN THE SWPPP. [MINN. R. 7090]

TO A COMMON LOCATION. [MINN. R. 7090]

15.2 PERMITTEES MUST DESIGN THE PROJECT SO ALL STORMWATER DISCHARGED FROM THE PROJECT DURING AND AFTER CONSTRUCTION ACTIVITIES DOES NOT CAUSE A VIOLATION OF STATE WATER OUALITY STANDARDS, INCLUDING NUISANCE CONDITIONS, EROSION IN RECEIVING CHANNELS OR ON DOWNSLOPE PROPERTIES, OR A SIGNIFICANT ADVERSE IMPACT TO WETLANDS CAUSED BY INUNDATION OR DECREASE OF FLOW. [MINN. R. 7090]

15.3 PERMITTEES MUST DESIGN AND CONSTRUCT A PERMANENT STORMWATER TREATMENT SYSTEM TO TREAT THE WATER QUALITY VOLUME IF THE PROJECT'S ULTIMATE DEVELOPMENT REPLACES VEGETATION AND/OR OTHER PERVIOUS SURFACES CREATING A NET INCREASE OF ONE (1) OR MORE ACRES OF CUMULATIVE IMPERVIOUS SURFACE. [MINN. R. 7090] 15.4 PERMITTEES MUST CALCULATE THE WATER QUALITY VOLUME AS ONE (1) INCH TIMES THE NET INCREASE OF IMPERVIOUS

SURFACES CREATED BY THE PROJECT. [MINN. R. 7090] 15.5 PERMITTEES MUST FIRST CONSIDER VOLUME REDUCTION PRACTICES ON-SITE (E.G., INFILTRATION OR OTHER) WHEN DESIGNING THE PERMANENT STORMWATER TREATMENT SYSTEM, IE THIS PERMIT PROHIBITS INFILTRATION AS DESCRIBED IN ITEM 16.14 THROUGH ITEM 16.21, PERMITTEES MAY CONSIDER A WET SEDIMENTATION BASIN, FILTRATION BASIN OR REGIONAL POND. THIS PERMIT DOES NOT CONSIDER WET SEDIMENTATION BASINS AND FILTRATION SYSTEMS TO BE VOLUME REDUCTION PRACTICES. [MINN. R. 7090]

15.6 FOR PROJECTS WHERE THE FULL VOLUME REDUCTION REQUIREMENT CANNOT BE MET ON-SITE, (E.G., THE SITE HAS INFILTRATION PROHIBITIONS), PERMITTEES MUST DOCUMENT THE REASONS IN THE SWPPP. [MINN. R. 7090] 15.7 PERMITTEES MUST DISCHARGE THE WATER QUALITY VOLUME TO A PERMANENT STORMWATER TREATMENT SYSTEM PRIOR TO DISCHARGE TO A SURFACE WATER. FOR PURPOSES OF THIS ITEM, SURFACE WATERS DO NOT INCLUDE MAN-MADE

DRAINAGE SYSTEMS THAT CONVEY STORMWATER TO A PERMANENT STORMWATER TREATMENT SYSTEM. [MINN. R. 7090] 15.8 WHERE THE PROXIMITY TO BEDROCK PRECLUDES THE INSTALLATION OF ANY OF THE PERMANENT STORMWATER TREATMENT PRACTICES REQUIRED BY SECTIONS 15 THROUGH 19, PERMITTEES MUST INSTALL OTHER TREATMENT SUCH AS GRASSED SWALES, SMALLER PONDS, OR GRIT CHAMBERS, PRIOR TO THE DISCHARGE OF STORMWATER TO SURFACE WATERS. MINN. R. 70901

15.9 FOR LINEAR PROJECTS WHERE PERMITTEES CANNOT TREAT THE ENTIRE WATER QUALITY VOLUME WITHIN THE EXISTING RIGHT OF-WAY, PERMITTEES MUST MAKE A REASONABLE ATTEMPT TO OBTAIN ADDITIONAL RIGHT-OF-WAY, EASEMENT OR OTHER PERMISSION FOR STORMWATER TREATMENT DURING THE PROJECT PLANNING PROCESS. DOCUMENTATION OF THESE ATTEMPTS MUST BE IN THE SWPPP, PERMITTEES MUST STILL CONSIDER VOLUME REDUCTION PRACTICES FIRST AS DESCRIBED IN ITEM 15.5. IF PERMITTEES CANNOT OBTAIN ADDITIONAL RIGHT-OF-WAY, FASEMENT OR OTHER PERMISSION, THEY MUST MAXIMIZE THE TREATMENT OF THE WATER QUALITY VOLUME PRIOR TO DISCHARGE TO SURFACE WATERS. [MINN. R. 7090]

16.2 INFILTRATION OPTIONS INCLUDE, BUT ARE NOT LIMITED TO: INFILTRATION BASINS, INFILTRATION TRENCHES, RAINWATER GARDENS, BIORETENTION AREAS WITHOUT UNDERDRAINS, SWALES WITH IMPERMEABLE CHECK DAMS, AND NATURAL DEPRESSIONS. IF PERMITTEES UTILIZE AN INFILTRATION SYSTEM TO MEET THE REQUIREMENTS OF THIS PERMIT, THEY MUST INCORPORATE THE DESIGN PARAMETERS IN ITEM 16.3 THROUGH ITEM 16.21. PERMITTEES MUST FOLLOW THE INFILTRATION PROHIBITION IN ITEM 16.14 ANYTIME AN INFILTRATION SYSTEM IS DESIGNED, INCLUDING THOSE NOT 16.3 PERMITTEES MUST DESIGN INFILTRATION SYSTEMS SUCH THAT PRE-EXISTING HYDROLOGIC CONDITIONS OF WETLANDS

IN THE VICINITY ARE NOT IMPACTED (E.G., INUNDATION OR BREACHING A PERCHED WATER TABLE SUPPORTING A WETLAND). [MINN. R. 7090] 16.4 PERMITTEES MUST NOT EXCAVATE INFILTRATION SYSTEMS TO FINAL GRADE, OR WITHIN THREE (3) FEET OF FINAL

GRADE, UNTIL THE CONTRIBUTING DRAINAGE AREA HAS BEEN CONSTRUCTED AND FULLY STABILIZED UNLESS THEY PROVIDE RIGOROUS EROSION PREVENTION AND SEDIMENT CONTROLS (E.G., DIVERSION BERMS) TO KEEP SEDIMENT AND RUNOFF COMPLETELY AWAY FROM THE INFILTRATION AREA. [MINN. R. 7090] 16.5 WHEN EXCAVATING AN INFILTRATION SYSTEM TO WITHIN THREE (3) FEET OF FINAL GRADE, PERMITTEES MUST STAKE

OFF AND MARK THE AREA SO HEAVY CONSTRUCTION VEHICLES OR EQUIPMENT DO NOT COMPACT THE SOIL IN THE INFILTRATION AREA, [MINN, R. 7090] 16.6 PERMITTEES MUST USE A PRETREATMENT DEVICE SUCH AS A VEGETATED FILTER STRIP, FOREBAY, OR WATER QUALITY INLET (E.G., GRIT CHAMBER) TO REMOVE SOLIDS, FLOATING MATERIALS, AND OIL AND GREASE FROM THE RUNOFF, TO THE MAXIMUM EXTENT PRACTICABLE, BEFORE THE SYSTEM ROUTES STORMWATER TO THE INFILTRATION SYSTEM. [MINN. R. 7090] 16.7 PERMITTEES MUST DESIGN INFILTRATION SYSTEMS TO PROVIDE A WATER QUALITY VOLUME (CALCULATED AS AN

INSTANTANEOUS VOLUME) OF ONE (1) INCH OF RUNOFF, OR ONE (1) INCH MINUS THE VOLUME OF STORMWATER TREATED BY ANOTHER SYSTEM ON THE SITE, FROM THE NET INCREASE OF IMPERVIOUS SURFACES CREATED BY THE PROJECT. [MINN. R. 16.8 PERMITTEES MUST DESIGN THE INFILTRATION SYSTEM TO DISCHARGE ALL STORMWATER (INCLUDING STORMWATER IN EXCESS OF THE WATER QUALITY VOLUME) ROUTED TO THE SYSTEM THROUGH THE UPPERMOST SOIL SURFACE OR ENGINEERED MEDIA SURFACE WITHIN 48 HOURS. PERMITTEES MUST ROUTE ADDITIONAL FLOWS THAT CANNOT INFILTRATE WITHIN 48 HOURS TO BYPASS THE SYSTEM THROUGH A STABILIZED DISCHARGE POINT. [MINN. R. 7090]

SOIL SURFACE OR FILTER MEDIA SURFACE WITHIN 48 HOURS OR LESS. [MINN. R. 7090] 16.10 PERMITTEES MUST PROVIDE AT LEAST ONE SOIL BORING, TEST PIT OR INFILTROMETER TEST IN THE LOCATION OF THE INFILTRATION PRACTICE FOR DETERMINING INFILTRATION RATES. [MINN. R. 7090] 16.11 FOR DESIGN PURPOSES, PERMITTEES MUST DIVIDE FIELD MEASURED INFILTRATION RATES BY 2 AS A SAFETY FACTOR OR PERMITTEES CAN USE SOIL-BORING RESULTS WITH THE INFILTRATION RATE CHART IN THE MINNESOTA STORMWATER

MANUAL TO DETERMINE DESIGN INFILTRATION RATES. WHEN SOIL BORINGS INDICATE TYPE A SOILS, PERMITTEES SHOULD PERFORM FIELD MEASUREMENTS TO VERIFY THE RATE IS NOT ABOVE 8.3 INCHES PER HOUR. THIS PERMIT PROHIBITS INFILTRATION IF THE FIELD MEASURED INFILTRATION RATE IS ABOVE 8.3 INCHES PER HOUR. [MINN. R. 7090] 16.12 PERMITTEES MUST EMPLOY APPROPRIATE ON-SITE TESTING ENSURE A MINIMUM OF THREE (3) FEET OF SEPARATION

16.9 PERMITTEES MUST PROVIDE A MEANS TO VISUALLY VERIFY THE INFILTRATION SYSTEM IS DISCHARGING THROUGH THE

FROM THE SEASONALLY SATURATED SOILS (OR FROM BEDROCK) AND THE BOTTOM OF THE PROPOSED INFILTRATION SYSTEM. 16.13 PERMITTEES MUST DESIGN A MAINTENANCE ACCESS, TYPICALLY EIGHT (8) FEET WIDE, FOR THE INFILTRATION SYSTEM. [MINN. R. 7090]

16.14 THIS PERMIT PROHIBITS PERMITTEES FROM CONSTRUCTING INFILTRATION SYSTEMS THAT RECEIVE RUNOFF FROM VEHICLE FUELING AND MAINTENANCE AREAS INCLUDING CONSTRUCTION OF INFILTRATION SYSTEMS NOT REQUIRED BY THIS

16.15 THIS PERMIT PROHIBITS PERMITTEES FROM CONSTRUCTING INFILTRATION SYSTEMS WHERE INFILTRATING STORMWATER MAY MOBILIZE HIGH LEVELS OF CONTAMINANTS IN SOIL OR GROUNDWATER. PERMITTEES MUST EITHER COMPLETE THE MPCA'S CONTAMINATION SCREENING CHECKLIST OR CONDUCT THEIR OWN ASSESSMENT TO DETERMINE THE SUITABILITY FOR INFILTRATION. PERMITTEES MUST RETAIN THE CHECKLIST OR ASSESSMENT WITH THE SWPPP. FOR MORE INFORMATION AND TO ACCESS THE MPCA'S "CONTAMINATION SCREENING CHECKLIST" SEE THE MINNESOTA STORMWATER MANUAL [MINN. R. 7090]

16.16 THIS PERMIT PROHIBITS PERMITTEES FROM CONSTRUCTING INFILTRATION SYSTEMS IN AREAS WHERE SOIL INFILTRATION RATES ARE FIELD MEASURED AT MORE THAN 8.3 INCHES PER HOUR UNLESS THEY AMEND SOILS TO SLOW THE INFILTRATION RATE BELOW 8.3 INCHES PER HOUR. [MINN. R. 7090]

16.17 THIS PERMIT PROHIBITS PERMITTEES FROM CONSTRUCTING INFILTRATION SYSTEMS IN AREAS WITH LESS THAN THREE (3) FEET OF SEPARATION DISTANCE FROM THE BOTTOM OF THE INFILTRATION SYSTEM TO THE ELEVATION OF THE SEASONALLY SATURATED SOILS OR THE TOP OF BEDROCK. [MINN. R. 7090] 16.18 THIS PERMIT PROHIBITS PERMITTEES FROM CONSTRUCTING INFILTRATION SYSTEMS IN AREAS OF PREDOMINATELY

HYDROLOGIC SOIL GROUP TYPE D SOILS (CLAY). [MINN. R. 7090] 16.19 THIS PERMIT PROHIBITS PERMITTEES FROM CONSTRUCTING INFILTRATION SYSTEMS WITHIN A DRINKING WATER SUPPLY MANAGEMENT AREA (DWSMA) AS DEFINED IN MINN. R. 4720.5100, SUBP. 13, IF THE SYSTEM WILL BE LOCATED:

A. IN AN EMERGENCY RESPONSE AREA (ERA) WITHIN A DWSMA CLASSIFIED AS HAVING HIGH OR VERY HIGH VULNERABILITY AS DEFINED BY THE MINNESOTA DEPARTMENT OF HEALTH; OR

B. IN AN ERA WITHIN A DWSMA CLASSIFIED AS MODERATE VULNERABILITY UNLESS A REGULATED MS4 PERMITTEE PERFORMED OR APPROVED A HIGHER LEVEL OF ENGINEERING REVIEW SUFFICIENT TO PROVIDE A FUNCTIONING TREATMENT SYSTEM AND TO PREVENT ADVERSE IMPACTS TO GROUNDWATER; OR

C. OUTSIDE OF AN ERA WITHIN A DWSMA CLASSIFIED AS HAVING HIGH OR VERY HIGH VULNERABILITY, UNLESS A REGULATED MS4 PERMITTEE PERFORMED OR APPROVED A HIGHER LEVEL OF ENGINEERING REVIEW SUFFICIENT TO PROVIDE A FUNCTIONING TREATMENT SYSTEM AND TO PREVENT ADVERSE IMPACTS TO GROUNDWATER. SEE "HIGHER LEVEL OF ENGINEERING REVIEW" IN THE MINNESOTA STORMWATER MANUAL FOR MORE INFORMATION. [MINN.

16.20 THIS PERMIT PROHIBITS PERMITTEES FROM CONSTRUCTING INFILTRATION SYSTEMS IN AREAS WITHIN 1,000 FEET UPGRADIENT OR 100 FEET DOWNGRADIENT OF ACTIVE KARST FEATURES. [MINN. R. 7090] 16.21 THIS PERMIT PROHIBITS PERMITTEES FROM CONSTRUCTING INFILTRATION SYSTEMS IN AREAS THAT RECEIVE RUNOFF FROM THE FOLLOWING INDUSTRIAL FACILITIES NOT AUTHORIZED TO INFILTRATE STORMWATER UNDER THE NPDES STORMWATER PERMIT FOR INDUSTRIAL ACTIVITIES: AUTOMOBILE SALVAGE YARDS: SCRAP RECYCLING AND WASTE RECYCLING FACILITIES; HAZARDOUS WASTE TREATMENT, STORAGE, OR DISPOSAL FACILITIES; OR AIR TRANSPORTATION FACILITIES THAT CONDUCT DEICING ACTIVITIES. [MINN. R. 7090]

17.1 FILTRATION SYSTEMS. [MINN. R. 7090]

17.2 FILTRATION OPTIONS INCLUDE, BUT ARE NOT LIMITED TO: SAND FILTERS WITH UNDERDRAINS, BIOFILTRATION AREAS, SWALES USING UNDERDRAINS WITH IMPERMEABLE CHECK DAMS AND UNDERGROUND SAND FILTERS. IF PERMITTEES UTILIZE A FILTRATION SYSTEM TO MEET THE PERMANENT STORMWATER TREATMENT REQUIREMENTS OF THIS PERMIT, THEY MUST COMPLY WITH ITEMS 17.3 THROUGH 17.11. [MINN. R. 7090]

17.3 PERMITTEES MUST NOT INSTALL FILTER MEDIA UNTIL THEY CONSTRUCT AND FULLY STABILIZE THE CONTRIBUTING

DRAINAGE AREA UNLESS THEY PROVIDE RIGOROUS EROSION PREVENTION AND SEDIMENT CONTROLS (E.G., DIVERSION BERMS) TO KEEP SEDIMENT AND RUNOFF COMPLETELY AWAY FROM THE FILTRATION AREA. [MINN. R. 7090] 17.4 PERMITTEES MUST DESIGN FILTRATION SYSTEMS TO REMOVE AT LEAST 80 PERCENT OF TSS. [MINN. R. 7090] 17.5 PERMITTEES MUST USE A PRETREATMENT DEVICE SUCH AS A VEGETATED FILTER STRIP. SMALL SEDIMENTATION BASIN. WATER QUALITY INLET. FOREBAY OR HYDRODYNAMIC SEPARATOR TO REMOVE SETTLEABLE SOLIDS, FLOATING MATERIALS, AND OILS AND GREASE FROM THE RUNOFF, TO THE MAXIMUM EXTENT PRACTICABLE, BEFORE RUNOFF ENTERS THE FILTRATION SYSTEM. [MINN. R. 7090]

17.6 PERMITTEES MUST DESIGN FILTRATION SYSTEMS TO TREAT A WATER QUALITY VOLUME (CALCULATED AS AN INSTANTANEOUS VOLUME) OF ONE (1) INCH OF RUNOFF, OR ONE (1) INCH MINUS THE VOLUME OF STORMWATER TREATED BY ANOTHER SYSTEM ON THE SITE, FROM THE NET INCREASE OF IMPERVIOUS SURFACES CREATED BY THE PROJECT. [MINN. R.

17.7 PERMITTEES MUST DESIGN THE FILTRATION SYSTEM TO DISCHARGE ALL STORMWATER (INCLUDING STORMWATER IN EXCESS OF THE WATER QUALITY VOLUME) ROUTED TO THE SYSTEM THROUGH THE UPPERMOST SOIL SURFACE OR ENGINEERED MEDIA SURFACE WITHIN 48 HOURS. ADDITIONAL FLOWS THAT THE SYSTEM CANNOT FILTER WITHIN 48 HOURS

17.8 PERMITTEES MUST DESIGN THE FILTRATION SYSTEM TO PROVIDE A MEANS TO VISUALLY VERIFY THE SYSTEM IS DISCHARGING THROUGH THE SOIL SURFACE OR FILTER MEDIA WITHIN 48 HOURS. [MINN. R. 7090]

MUST BYPASS THE SYSTEM OR DISCHARGE THROUGH AN EMERGENCY OVERFLOW. [MINN. R. 7090]

17.9 PERMITTEES MUST EMPLOY APPROPRIATE ON-SITE TESTING TO ENSURE A MINIMUM OF THREE (3) FEET OF SEPARATION BETWEEN THE SEASONALLY SATURATED SOILS (OR FROM BEDROCK) AND THE BOTTOM OF THE PROPOSED FILTRATION 17.10 PERMITTEES MUST ENSURE THAT FILTRATION SYSTEMS WITH LESS THAN THREE (3) FEET OF SEPARATION BETWEEN

SEASONALLY SATURATED SOILS OR FROM BEDROCK ARE CONSTRUCTED WITH AN IMPERMEABLE LINER. [MINN. R. 7090] 17.11 THE PERMITTEES MUST DESIGN A MAINTENANCE ACCESS, TYPICALLY EIGHT (8) FEET WIDE, FOR THE FILTRATION SYSTEM. [MINN. R. 7090]

18.1 WET SEDIMENTATION BASIN. [MINN. R. 7090]

18.2 PERMITTEES USING A WET SEDIMENTATION BASIN TO MEET THE PERMANENT STORMWATER TREATMENT REQUIREMENTS OF THIS PERMIT MUST INCORPORATE THE DESIGN PARAMETERS IN ITEM 18.3 THROUGH 18.10. [MINN. R. 7090] 18.3 PERMITTEES MUST DESIGN THE BASIN TO HAVE A PERMANENT VOLUME OF 1,800 CUBIC FEET OF STORAGE BELOW THE OUTLET PIPE FOR EACH ACRE THAT DRAINS TO THE BASIN. THE BASIN'S PERMANENT VOLUME MUST REACH A MINIMUM DEPTH OF AT LEAST THREE (3) FEET AND MUST HAVE NO DEPTH GREATER THAN 10 FEET. PERMITTEES MUST CONFIGURE THE BASIN FO MINIMIZE SCOUR OR RESUSPENSION OF SOLIDS. [MINN. R. 7090]

18.4 PERMITTEES MUST DESIGN THE BASIN TO PROVIDE LIVE STORAGE FOR A WATER QUALITY VOLUME (CALCULATED AS AN INSTANTANEOUS VOLUME) OF ONE (1) INCH OF RUNOFF, OR ONE (1) INCH MINUS THE VOLUME OF STORMWATER TREATED BY ANOTHER SYSTEM ON THE SITE, FROM THE NET INCREASE IN IMPERVIOUS SURFACES CREATED BY THE PROJECT. [MINN. R.

18.5 PERMITTEES MUST DESIGN BASIN OUTLETS SO THE WATER OUALITY VOLUME DISCHARGES AT NO MORE THAN 5.66 CUBIC FEET PER SECOND (CFS) PER ACRE OF SURFACE AREA OF THE BASIN. [MINN. R. 7090] 18.6 PERMITTEES MUST DESIGN BASIN OUTLETS TO PREVENT SHORT-CIRCUITING AND THE DISCHARGE OF FLOATING DEBRIS.

18.7 PERMITTEES MUST DESIGN THE BASIN TO INCLUDE A STABILIZED EMERGENCY OVERFLOW TO ACCOMMODATE STORM EVENTS IN EXCESS OF THE BASIN'S HYDRAULIC DESIGN. [MINN. R. 7090] 18.8 PERMITTEES MUST DESIGN A MAINTENANCE ACCESS, TYPICALLY EIGHT (8) FEET WIDE, FOR THE BASIN. [MINN. R. 7090] 18.9 PERMITTEES MUST LOCATE BASINS OUTSIDE OF SURFACE WATERS AND ANY BUFFER ZONE REQUIRED IN ITEM 23.11. PERMITTEES MUST DESIGN BASINS TO AVOID DRAINING WATER FROM WETLANDS UNLESS THE IMPACT TO THE WETLAND

18.10 PERMITTEES MUST DESIGN BASINS USING AN IMPERMEABLE LINER IF LOCATED WITHIN ACTIVE KARST TERRAIN. [MINN. R. 7090]

19.1 REGIONAL WET SEDIMENTATION BASINS. [MINN. R. 7090]

BASIN OUTLETS MUST HAVE ENERGY DISSIPATION. [MINN. R. 7090]

COMPLIES WITH THE REQUIREMENTS OF SECTION 22. [MINN. R. 7090]

19.2 WHEN THE ENTIRE WATER QUALITY VOLUME CANNOT BE RETAINED ONSITE, PERMITTEES CAN USE OR CREATE REGIONAL WET SEDIMENTATION BASINS PROVIDED THEY ARE CONSTRUCTED BASINS, NOT A NATURAL WETLAND OR WATER BODY, (WETLANDS USED AS REGIONAL BASINS MUST BE MITIGATED FOR, SEE SECTION 22), THE OWNER MUST ENSURE THE REGIONAL BASIN CONFORMS TO ALL REQUIREMENTS FOR A WET SEDIMENTATION BASIN AS DESCRIBED IN ITEMS 18.3 THROUGH 18.10 AND MUST BE LARGE ENOUGH TO ACCOUNT FOR THE ENTIRE AREA THAT DRAINS TO THE REGIONAL BASIN. PERMITTEES MUST VERIFY THAT THE REGIONAL BASIN WILL DISCHARGE AT NO MORE THAN 5.66 CFS PER ACRE OF SURFACE AREA OF THE BASIN AND MUST PROVIDE A LIVE STORAGE VOLUME OF ONE INCH TIMES ALL THE IMPERVIOUS AREA DRAINING TO THE BASIN. PERMITTEES CANNOT SIGNIFICANTLY DEGRADE WATERWAYS BETWEEN THE PROJECT AND THE REGIONAL BASIN. THE OWNER MUST OBTAIN WRITTEN AUTHORIZATION FROM THE APPLICABLE LGU OR PRIVATE ENTITY THAT OWNS AND MAINTAINS THE REGIONAL BASIN. [MINN. R. 7090]

20.1 SWPPP AVAILABILITY. [MINN. R. 7090] 20.2 PERMITTEES MUST KEEP THE SWPPP, INCLUDING ALL CHANGES TO IT, AND INSPECTIONS AND MAINTENANCE RECORDS

AT THE SITE DURING NORMAL WORKING HOURS BY PERMITTEES WHO HAVE OPERATIONAL CONTROL OF THAT PORTION OF THE SITE. [MINN. R. 7090]

21.1 TRAINING REQUIREMENTS. [MINN. R. 7090]

21.2 PERMITTEES MUST ENSURE ALL OF THE FOLLOWING INDIVIDUALS RECEIVE TRAINING AND THE CONTENT AND EXTENT OF THE TRAINING IS COMMENSURATE WITH THE INDIVIDUAL'S JOB DUTIES AND RESPONSIBILITIES WITH REGARD TO ACTIVITIES COVERED UNDER THIS PERMIT: A. INDIVIDUALS PREPARING THE SWPPP FOR THE PROJECT.

INSPECTION WITHIN 72 HOURS UPON REQUEST BY THE MPCA. C. INDIVIDUALS PERFORMING OR SUPERVISING THE INSTALLATION, MAINTENANCE AND REPAIR OF BMPS. [MINN. R. 7090] 21.3 PERMITTEES MUST ENSURE INDIVIDUALS IDENTIFIED IN SECTION 21 RECEIVE TRAINING FROM LOCAL, STATE, FEDERAL AGENCIES, PROFESSIONAL ORGANIZATIONS, OR OTHER ENTITIES WITH EXPERTISE IN EROSION PREVENTION, SEDIMENT CONTROL, PERMANENT STORMWATER TREATMENT AND THE MINNESOTA NPDES/SDS CONSTRUCTION STORMWATER PERMIT. PERMITTEES MUST ENSURE THESE INDIVIDUALS ATTEND A REFRESHER-TRAINING COURSE EVERY THREE (3) YEARS. [MINN. R.

B. INDIVIDUALS OVERSEEING IMPLEMENTATION OF, REVISING AND/OR AMENDING THE SWPPP AND INDIVIDUALS

PERFORMING INSPECTIONS FOR THE PROJECT. ONE OF THESE INDIVIDUALS MUST BE AVAILABLE FOR AN ONSITE

24.1 GENERAL PROVISIONS. [MINN. R. 7090]

24.2 IF THE MPCA DETERMINES THAT AN INDIVIDUAL PERMIT WOULD MORE APPROPRIATELY REGULATE THE CONSTRUCTION ACTIVITY, THE MPCA MAY REQUIRE AN INDIVIDUAL PERMIT TO CONTINUE THE CONSTRUCTION ACTIVITY. COVERAGE UNDER THIS GENERAL PERMIT WILL REMAIN IN EFFECT UNTIL THE MPCA ISSUES AN INDIVIDUAL PERMIT. [MINN. R. 7001.0210, SUBP.

24.3 IF THE PERMITTEE CANNOT MEET THE TERMS AND CONDITIONS OF THIS GENERAL PERMIT, AN OWNER MAY REQUEST AN INDIVIDUAL PERMIT, IN ACCORDANCE WITH MINN. R. 7001.0210 SUBP. 6. [MINN. R. 7001.0210, SUBP. 6] 24.4 ANY INTERESTED PERSON MAY PETITION THE MPCA TO REQUIRE AN INDIVIDUAL NPDES/SDS PERMIT IN ACCORDANCE WITH 40 CFR 122.28(B)(3). [40 CFR 122.29(B)(3)] 24.5 PERMITTEES MUST MAKE THE SWPPP, INCLUDING ALL INSPECTION REPORTS, MAINTENANCE RECORDS, TRAINING

RECORDS AND OTHER INFORMATION REQUIRED BY THIS PERMIT, AVAILABLE TO FEDERAL, STATE, AND LOCAL OFFICIALS WITHIN THREE (3) DAYS UPON REQUEST FOR THE DURATION OF THE PERMIT AND FOR THREE (3) YEARS FOLLOWING THE NOT. [MINN. R. 7090]

24.6 PERMITTEES MAY NOT ASSIGN OR TRANSFER THIS PERMIT EXCEPT WHEN THE TRANSFER OCCURS IN ACCORDANCE WITH THE APPLICABLE REQUIREMENTS OF ITEM 3.7 AND 3.8. [MINN. R. 7090]

24.7 NOTHING IN THIS PERMIT MUST BE CONSTRUED TO RELIEVE THE PERMITTEES FROM CIVIL OR CRIMINAL PENALTIES FOR NONCOMPLIANCE WITH THE TERMS AND CONDITIONS PROVIDED HEREIN. NOTHING IN THIS PERMIT MUST BE CONSTRUED TO PRECLUDE THE INITIATION OF ANY LEGAL ACTION OR RELIEVE THE PERMITTEES FROM ANY RESPONSIBILITIES, LIABILITIES, OR PENALTIES TO WHICH THE PERMITTEES IS/ARE OR MAY BE SUBJECT TO UNDER SECTION 311 OF THE CLEAN WATER ACT AND MINN. STAT. SECT. 115 AND 116, AS AMENDED. PERMITTEES ARE NOT LIABLE FOR PERMIT REQUIREMENTS FOR ACTIVITIES OCCURRING ON THOSE PORTIONS OF A SITE WHERE THE PERMIT HAS BEEN TRANSFERRED TO ANOTHER PARTY AS REQUIRED IN ITEM 3.7 OR THE PERMITTEES HAVE SUBMITTED THE NOT AS REQUIRED IN SECTION 4. [MINN. R. 7090] 24.8 THE PROVISIONS OF THIS PERMIT ARE SEVERABLE. IF ANY PROVISION OF THIS PERMIT OR THE APPLICATION OF ANY PROVISION OF THIS PERMIT TO ANY CIRCUMSTANCES IS HELD INVALID, THE APPLICATION OF SUCH PROVISION TO OTHER CIRCUMSTANCES, AND THE REMAINDER OF THIS PERMIT MUST NOT BE AFFECTED THEREBY. [MINN. R. 7090] 24.9 THE PERMITTEES MUST COMPLY WITH THE PROVISIONS OF MINN. R. 7001.0150, SUBP. 3 AND MINN. R. 7001.1090, SUBP.

1(A), 1(B), 1(C), 1(H), 1(I), 1(J), 1(K), AND 1(L). [MINN. R. 7090] 24.10 THE PERMITTEES MUST ALLOW ACCESS AS PROVIDED IN 40 CFR 122.41(I) AND MINN, STAT, SECT. 115.04. THE PERMITTEES MUST ALLOW REPRESENTATIVES OF THE MPCA OR ANY MEMBER. EMPLOYEE OR AGENT THEREOF, WHEN AUTHORIZED BY IT, UPON PRESENTATION OF CREDENTIALS, TO ENTER UPON ANY PROPERTY, PUBLIC OR PRIVATE FOR THE PURPOSE OF OBTAINING INFORMATION OR EXAMINATION OF RECORDS OR CONDUCTING SURVEYS OR INVESTIGATIONS. [40 CFR 122.41(I)]

24.11 FOR THE PURPOSES OF MINN. R. 7090 AND OTHER DOCUMENTS THAT REFERENCE SPECIFIC SECTIONS OF THIS PERMIT, STORMWATER DISCHARGE DESIGN REQUIREMENTS" CORRESPONDS TO SECTIONS 5, 6 AND 14 THROUGH 21; "CONSTRUCTION ACTIVITY REQUIREMENTS" CORRESPONDS TO SECTIONS 7 THROUGH 13; AND "APPENDIX A" CORRESPONDS TO SECTIONS 22 AND 23. [MINN. R. 7090]

& ENGINEERING

6776 LAKE DRIVE

SUITE 110 LINO LAKES, MN 5501 PHONE: (651) 361-8210 FAX: (651) 361-8701 DRAWN BY: CHECK BY

CWP JOB NO: DATE: 11/16/22 22-2076

- | 2 | 8 | 4 | 5 | 9 | 7 | 8

S:\PLOWE\CAD\23PROJ\2125 HIDDEN PRAIRIE\2125 CAD\2125 BASE 13.DWG Thursday, April 24, 2025 12:16:42 PM

PROJECT NAME HIDDEN PRAIRIE

PROJECT LOCATION

ANOKA COUNTY

** NO ASSIGNED ADDRESS ** WEST SIDE OF EAST BETHEL DRIVE AT 198TH AVE NE (APPROXIMATELY) EAST BETHEL, MN 55011

> LATITUDE: 45.32862 LONGITUDE: -93.19824

TH CONSTRUCTION OF ANOKA, INC. 617 E MAIN ST STE 3

EAST BETHEL, MN 55303

CONTACT NAME: TONY HENNEN CONTACT PHONE: (763) 422-8809

CONTACT E-MAIL: THOFANOKA@GMAIL.COM

GENERAL CONTRACTOR

NARRATIVE - PERMANENT STORMWATER TREATMENT SYSTEMS

THERE ARE THREE (3) INFILTRATION BASINS TO HANDLE STORMWATER RUN-OFF PRETREATMENT IS PROVIDED VIA THE GRASSED DITCH SWALE AND OVERLAND SHEET FLOW OVER GRASS. SEE "STORMWATER DRAINAGE REPORT" FOR FURTHER DISCUSSION AND INFORMATION.

SITE IMPERVIOUS AREAS

	BEFORE CONSTRUCTION	AFTER CONSTRUCTION	
TOTAL SITE AREA	* 44.04 ACRES		
TOTAL ESTIMATED IMPERVIOUS	0 ACRES	6.00 ACRES	
TOTAL ESTIMATED PERVIOUS	44.04 ACRES	38.04 ACRES	
* AFTER RIGHT-OF-WAY DEDICATION			

TOTAL DISTURBED AREA

~23.4 ACRES

SITE MAP W/ EXISTING AND FINAL GRADES AND DESIGN CALCULATIONS

SEE "STORMWATER DRAINAGE REPORT" FOR EXISTING AND PROPOSED AREA MAPS, DENOTING DRAINAGE AREA BOUNDARIES, DIRECTIONS OF FLOW, AND DISCHARGE POINTS WHERE STORMWATER LEAVES THE SITE.

RECEIVING WATERS WITHIN ONE MILE

NAME OF WATER BODY	TYPE OF WATER BODY	SPECIAL WATER	IMPAIRED WATER
UNNAMED WETLANDS	WETLAND	NO	NO

THERE ARE NO SPECIAL OR IMPAIRED WATERS WITHIN ONE (1) MILE OF THE PROJECT BOUNDARY

BUFFER TO SURFACE WATER

IF THE SITE DRAINS TO A SURFACE WATER, IS A 50-FT NATURAL BUFFER ADJACENT TO THE SURFACE WATER PRESERVED?

> NOTE: NATURAL BUFFERS ARE NOT REQUIRED ADJACENT TO ROAD DITCHES. JUDICIAL DITCHES, COUNTY DITCHES, STORMWATER CONVEYANCE CHANNELS, STORM DRAIN INLETS, AND SEDIMENT BASINS

A) THERE IS ONE WETLAND (SE CORNER OF SITE) - A 50-FT NATURAL BUFFER CAN

TEMPORARY SEDIMENTATION BASINS

IF TEN (10) OR MORE ACRES OF DISTURBED SOIL DRAIN TO A COMMON LOCATION, IS A TEMPORARY SEDIMENT BASIN PROVIDED FOR TREATMENT OF THE RUNOFF BEFORE IT LEAVES THE CONSTRUCTION SITE OR ENTERS

> A) THE CONTRACTOR WILL PROVIDE TEMPORARY SEDIMENTATION BASINS IF 10 OR MORE ACRES OF DISTURBED SOIL DRAIN TO A COMMON LOCATION.

INFILTRATION FEASIBILITY

ARE THERE ANY INFILTRATION RESTRICTIONS FOR THE SITE (SEE 16.14

PREPARATION.

YES NO N/A THROUGH 16.21? A) THE SITE HAS ZIMMERMAN SOILS. WHICH TYPICALLY ARE GOOD FOR INFILTRATION. NO SOILS REPORT IS AVAILABLE AT THE TIME OF PLAN

ADDITIONAL STORMWATER MITIGATION MEASURES

[MINN, R. 7090]

SURFACE WATERS?



■ ARE THERE ANY STORMWATER MITIGATION MEASURES PER:

- ARCHAEOLOGICAL REVIEW?
- YES NO ENVIRONMENTAL REVIEW DOCUMENT?
 - ENDANGERED SPECIES REVIEW?
 - OTHER LOCAL, STATE OR FEDERAL REVIEW? IF YES TO ANY OF THE ABOVE, DESCRIBE THE MITIGATION MEASURES. FOR PURPOSES OF THIS PERMIT, MITIGATION MEASURES MEANS ACTIONS NECESSARY TO AVOID, MINIMIZE, OR MITIGATE FOR IMPACTS RELATED TO EROSION PREVENTION, SEDIMENT CONTROL, THE PERMANENT STORMWATER TREATMENT SYSTEM, POLLUTION PREVENTION MANAGEMENT MEASURES AND

DISCHARGES ASSOCIATED WITH THE PROJECT'S CONSTRUCTION ACTIVITY.

DOCUMENTATION OF TRAINED INDIVIDUALS

A. INDIVIDUAL WHO PREPARED THE SWPPP: ADAM GINKEL PLOWE ENGINEERING, INC. 6776 LAKE DRIVE LINO LAKES MN 55014

B. INDIVIDUAL(S) OVERSEEING IMPLEMENTATION OF, REVISING AND/OR AMENDING THE SWPPP AND INDIVIDUALS PERFORMING INSPECTIONS FOR THE PROJECT. ONE OF THESE INDIVIDUALS MUST BE AVAILABLE FOR AN ONSITE INSPECTION WITHIN 72 HOURS UPON REQUEST BY THE MPCA. [MINN. R. 7090]

CONTACT NAME:

OFFICE: CONTACT PHONE:

CONTACT E-MAIL:

REPAIR OF BMPS. [MINN. R. 7090]

(651) 361-8234

adam@plowe.com

INDIVIDUAL(S) PERFORMING OR SUPERVISING THE INSTALLATION, MAINTENANCE AND

CONTACT NAME:

OFFICE:

CONTACT PHONE:

CONTACT E-MAIL:

LONG TERM OPERATION AND MAINTENANCE OF PERMANENT STORMWATER FACILITIES THE PROPOSED STORMWATER MANAGEMENT FEATURES FOR THIS SITE INCLUDES

SEVERAL INFILTRATION BASINS; THESE WILL BE OPERATED AND MAINTAINED BY THE CITY

REVEGETATION SPECIFICATIONS

OF EAST BETHEL.

ITEM		MNDOT SPECIFICATION/NOTES	
SOD		3878	
SEED **		3876	
* FOR TURF EST	ABLISHMENT		
C	OMMERCIAL TURF	MNDOT MIX 25-131 (220 LBS/ACRE)	
RESIDENTIAL TURF		MNDOT MIX 25-131 (120 LBS/ACRE)	
TEMPORARY	FALL COVER	MNDOT MIX 21-112 (100 LBS/ACRE)	
	SPRING/SUMMER	MNDOT MIX 21-111 (100 LBS/ACRE)	
SOIL	-BUILDING COVER	MNDOT MIX 21-113 (110 LBS/ACRE)	
	1-2 YEARS COVER	MNDOT MIX 22-111 (30.5 LBS/ACRE)	
2-5 YEARS COVER		MNDOT MIX 22-112 (40 LBS/ACRE)	
MULCH		3882 (TYPE 1 - DISC ANCHORED)	
HYDROMULCH		3884	
FERTILIZER		3881	
WOOD FIBER BLANKET		3885 (CATEGORY 2)	

* MOW A MINIMUM OF:

RESIDENTIAL TURF - ONCE PER 2 WEEKS COMMERCIAL TURF - ONCE PER 4 WEEKS

** SEEDED AREAS SHALL BE EITHER MULCHED OR COVERED BY FIBROUS BLANKETS TO PROTECT SEEDS AND LIMIT EROSION.

QUANTITIES - ESTIMATED QUANTITIES FOR EROSION AND SEDIMENT CONTROL MEASURES

TYPE	QTY	UNIT
SILT FENCE	8,613	LINEAR FEET
BIO-ROLLS	6,034	EACH
RIP-RAP (CLASS 3) W. GEO-FABRIC (TYPE 4)	19.2	CUBIC YARDS
BIOROLLS	3,151	EACH
STABILIZED (SODDED) OVERFLOW	1	EACH
EROSION CONTROL BLANKET	0	SQUARE YARDS
SEED & MULCH (GENERAL)	18.51	ACRE
SEED & MULCH (INFILTRATION BASIN MIX)	1.19	ACRE
ROCK CONSTRUCTION ENTRANCE	1	EACH

NARRATIVE - TIMING FOR INSTALLATION OF EROSION AND SEDIMENT CONTROL MEASURES

- 1. A COPY OF THE APPROVED EROSION AND SEDIMENT CONTROL PLAN AND SWPPP MUST BE AVAILABLE ON THE PROJECT SITE AT ALL TIMES.
- 2. CONTRACTOR SHALL INSTALL SILT FENCE AS SHOWN ON PLAN
- 2.1. ADDITIONAL SILT FENCE MAY BE NECESSARY IF LOCAL CONDITIONS REQUIRE. 2.2. THE CONTRACTOR SHALL MAINTAIN SILT FENCE, INCLUDING THE REMOVAL OF
- ACCUMULATED SEDIMENT, THROUGH COMPLETION OF BUILDING CONSTRUCTION. 2.3. SILT FENCE SHALL REMAIN IN-PLACE UNTIL SITE HAS BEEN STABILIZED.
- 3. CONTRACTOR SHALL INSTALL A ROCK CONSTRUCTION ENTRANCE AT ALL LOCATIONS WHERE CONSTRUCTION TRAFFIC WILL ENTER/EXIT SITE.
- CONTRACTOR TO INSTALL TREE PROTECTION FENCING AS APPLICABLE
- CONTRACTOR SHALL PERFORM SITE GRADING ON AN AREA-BY-AREA BASIS TO MINIMIZE UNSTABILIZED AREAS. 5.1. CONTRACTOR MUST IMMEDIATELY INITIATE STABILIZATION OF EXPOSED SOIL AREAS, AS DESCRIBED IN ITEM 8.4 OF THE PERMIT, AND COMPLETE THE
- STABILIZATION WITHIN FOURTEEN (14) CALENDAR DAYS AFTER THE CONSTRUCTION ACTIVITY IN THAT PORTION OF THE SITE TEMPORARILY OR PERMANENTLY CEASES.
- 5.2. CONTRACTOR TO PROVIDE TEMPORARY SEDIMENTATION BASINS AS REQUIRED IN SECTION 14.1 THROUGH 14.10.
- CONTRACTOR TO SHALL PAY SPECIAL ATTENTION TO ADJACENT PROPERTY LINES TO ENSURE THE EROSION CONTROL PRACTICES INPLACE IN THOSE AREAS PREVENT MIGRATION OF SEDIMENT ONTO ADJACENT PROPERTIES. ALL EROSION AND SEDIMENT CONTROL MEASURES SHOWN ON THE PLANS OR
- IMPLEMENTED IN THE FIELD SHALL BE IN ACCORDANCE WITH THE CITY AND NPDES PHASE II PERMIT REQUIREMENTS. CONTRACTOR TO PROVIDE ADDITIONAL SILT FENCE, BIOROLLS, EROSION CONTROL
- BLANKET, OR OTHER APPROVED EQUAL FOR ANY SLOPES THAT APPEAR TO BE
- 9. CONTRACTOR TO STABILIZE SOIL STOCKPILES; STABILIZATION SHALL BE INITIATED
- 10. CONTRACTOR SHALL FINAL GRADE SWALE AREAS UPON STABILIZATION OF UPSTREAM
- 11. CONTRACTOR SHALL BE RESPONSIBLE TO SWEEP/SCRAPE ADJACENT STREETS WHEN MATERIALS OR DEBRIS HAVE WASHED/FLOWED ONTO ADJACENT STREETS OR AS
- 12. COORDINATE SMALL UTILITIES INSTALLATIONS (GAS, PHONE, ELECTRIC, CABLE, FIBEROPTIC, ETC.) AFTER PAVEMENT INSTALLATION.

"BEST MANAGEMENT PRACTICES (BMPS)" MEANS THE MOST EFFECTIVE AND PRACTICABLE MEANS OF EROSION PREVENTION AND SEDIMENT CONTROL AND WATER QUALITY MANAGEMENT PRACTICES THAT ARE THE MOST EFFECTIVE AND PRACTICABLE MEANS OF TO CONTROL, PREVENT, AND MINIMIZE DEGRADATION OF SURFACE WATER, INCLUDING AVOIDANCE OF IMPACTS, CONSTRUCTION-PHASING, MINIMIZING THE LENGTH OF TIME SOIL AREAS ARE EXPOSED, PROHIBITIONS, POLLUTION PREVENTION THROUGH GOOD HOUSEKEEPING, AND OTHER MANAGEMENT PRACTICES PUBLISHED BY STATE OR DESIGNATED AREA-WIDE PLANNING AGENCIES. [MINN. R. 7090]

"CONSTRUCTION ACTIVITY" MEANS ACTIVITIES INCLUDING CLEARING, GRADING, AND EXCAVATING, THAT RESULT IN LAND DISTURBANCE OF EQUAL TO OR GREATER THAN ONE ACRE, INCLUDING THE DISTURBANCE OF LESS THAN ONE ACRE OF TOTAL LAND AREA THAT IS PART OF A LARGER COMMON PLAN OF DEVELOPMENT OR SALE IF THE LARGER COMMON PLAN WILL ULTIMATELY DISTURB EQUAL TO OR GREATER THAN ONE ACRE. THIS INCLUDES A DISTURBANCE TO THE LAND THAT RESULTS IN A CHANGE IN THE TOPOGRAPHY, EXISTING SOIL COVER, BOTH VEGETATIVE AND NONVEGETATIVE, OR THE EXISTING SOIL TOPOGRAPHY THAT MAY RESULT IN ACCELERATED STORMWATER RUNOFF THAT MAY LEAD TO SOIL EROSION AND MOVEMENT OF SEDIMENT. CONSTRUCTION ACTIVITY DOES NOT INCLUDE A DISTURBANCE TO THE LAND OF LESS THAN FIVE ACRES FOR THE PURPOSE OF ROUTINE MAINTENANCE PERFORMED TO MAINTAIN THE ORIGINAL LINE AND GRADE, HYDRAULIC CAPACITY, AND ORIGINAL PURPOSE OF THE FACILITY. ROUTINE MAINTENANCE DOES NOT INCLUDE ACTIVITIES SUCH AS REPAIRS, REPLACEMENT AND OTHER TYPES OF NON-ROUTINE MAINTENANCE, PAVEMENT REHABILITATION THAT DOES NOT DISTURB THE UNDERLYING SOILS (E.G., MILL AND OVERLAY PROJECTS) IS NOT CONSTRUCTION ACTIVITY. [MINN. R. 7090]

"DEWATERING" MEANS THE REMOVAL OF SURFACE OR GROUND WATER TO DRY AND/OR SOLIDIFY A CONSTRUCTION SITE TO ENABLE CONSTRUCTION ACTIVITY. DEWATERING MAY REQUIRE A MINNESOTA DEPARTMENT OF NATURAL RESOURCES WATER APPROPRIATION PERMIT AND, IF DEWATERING WATER IS CONTAMINATED, DISCHARGE OF SUCH WATER MAY REQUIRE AN INDIVIDUAL MPCA NPDES/SDS PERMIT. [MINN. R. 7090]

"EROSION PREVENTION" MEANS MEASURES EMPLOYED TO PREVENT EROSION SUCH AS SOIL STABILIZATION PRACTICES, PERMANENT COVER OR CONSTRUCTION PHASING. [MINN.

"GENERAL CONTRACTOR" MEANS THE PARTY WHO SIGNS THE CONSTRUCTION CONTRACT WITH THE OWNER TO CONSTRUCT THE ENTIRE PROJECT DESCRIBED IN THE FINAL PLANS AND SPECIFICATIONS. WHERE THE CONSTRUCTION PROJECT INVOLVES MORE THAN ONE CONTRACTOR. THE GENERAL CONTRACTOR IS THE PARTY RESPONSIBLE FOR MANAGING THE ENTIRE PROJECT ON BEHALF OF THE OWNER. IN SOME CASES, THE OWNER IS THE GENERAL CONTRACTOR. IN THESE CASES, THE OWNER SIGNS THE PERMIT APPLICATION AS THE OPERATOR AND BECOMES THE SOLE PERMITTEE. [MINN. R. 7090]

"GROUNDWATER" MEANS THE WATER CONTAINED BELOW THE SURFACE OF THE EARTH IN THE SATURATED ZONE INCLUDING, WITHOUT LIMITATION, ALL WATERS WHETHER UNDER CONFINED, UNCONFINED, OR PERCHED CONDITIONS, IN NEAR SURFACE UNCONSOLIDATED SEDIMENT OR REGOLITH, OR IN ROCK FORMATIONS DEEPER UNDERGROUND. [MINN. R.

"HOMEOWNER FACT SHEET" MEANS AN MPCA FACT SHEET AVAILABLE ON THE MPCA CONSTRUCTION STORMWATER WEBSITE FOR PERMITTEES TO GIVE TO HOMEOWNERS AT THE TIME OF SALE. [MINN. R. 7090]

"INFEASIBLE" MEANS NOT TECHNOLOGICALLY POSSIBLE OR NOT ECONOMICALLY PRACTICABLE AND ACHIEVABLE IN LIGHT OF THE BEST INDUSTRY PRACTICES. [MINN. R.

"INITIATED IMMEDIATELY" MEANS TAKING AN ACTION TO COMMENCE SOIL STABILIZATION AS SOON AS PRACTICABLE, BUT NO LATER THAN THE END OF THE WORK DAY, FOLLOWING THE DAY WHEN THE LAND-DISTURBING ACTIVITIES TEMPORARILY OR PERMANENTLY CEASE, IF THE PERMITTEES KNOW THAT CONSTRUCTION WORK ON THAT PORTION OF THE SITE WILL BE TEMPORARILY CEASED FOR 14 OR MORE ADDITIONAL CALENDAR DAYS OR 7 CALENDAR DAYS WHERE ITEM 23.9 APPLIES. PERMITTEES CAN INITIATE STABILIZATION BY:

- A. PREPPING THE SOIL FOR VEGETATIVE OR NON-VEGETATIVE STABILIZATION; OR B. APPLYING MULCH OR OTHER NON-VEGETATIVE PRODUCT TO THE EXPOSED SOIL
- AREA: OR

CONSIDERED IMPERVIOUS SURFACES. [MINN. R. 7090]

- C. SEEDING OR PLANTING THE EXPOSED AREA; OR D. STARTING ANY OF THE ACTIVITIES IN A - C ON A PORTION OF THE AREA TO BE
- STABILIZED, BUT NOT ON THE ENTIRE AREA; OR E. FINALIZING ARRANGEMENTS TO HAVE STABILIZATION PRODUCT FULLY INSTALLED IN

"IMPERVIOUS SURFACE" MEANS A CONSTRUCTED HARD SURFACE THAT EITHER PREVENTS OR RETARDS THE ENTRY OF WATER INTO THE SOIL AND CAUSES WATER TO RUN OFF THE SURFACE IN GREATER QUANTITIES AND AT AN INCREASED RATE OF FLOW THAN PRIOR TO DEVELOPMENT, EXAMPLES INCLUDE ROOFTOPS, SIDEWALKS, DRIVEWAYS, PARKING LOTS. AND CONCRETE, ASPHALT, OR GRAVEL ROADS. BRIDGES OVER SURFACE WATERS ARE

COMPLIANCE WITH THE APPLICABLE DEADLINE FOR COMPLETING STABILIZATION.

"NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM (NPDES)" MEANS THE PROGRAM FOR ISSUING, MODIFYING, REVOKING, REISSUING, TERMINATING, MONITORING, AND ENFORCING PERMITS UNDER THE CLEAN WATER ACT, AS AMENDED (33 U.S.C. 1251 ET SEQ. SECTION 1342 AND 40 CFR PARTS 122, 123, 124 AND 450). [MINN. R. 7090]

"NATURAL BUFFER" MEANS AN AREA OF UNDISTURBED COVER SURROUNDING SURFACE WATERS WITHIN WHICH CONSTRUCTION ACTIVITIES ARE RESTRICTED. NATURAL BUFFER INCLUDES THE VEGETATION, EXPOSED ROCK, OR BARREN GROUND THAT EXISTS PRIOR TO COMMENCEMENT OF EARTH-DISTURBING ACTIVITIES. [MINN. R. 7090] "NOTICE OF TERMINATION (NOT)" MEANS THE FORM (ELECTRONIC OR PAPER) REQUIRED

FOR TERMINATING COVERAGE UNDER THE CONSTRUCTION GENERAL PERMIT. [MINN. R.

""OPERATOR" MEANS THE PERSON (USUALLY THE GENERAL CONTRACTOR). FIRM. GOVERNMENTAL AGENCY, OR OTHER ENTITY DESIGNATED BY THE OWNER WHO HAS DAY TO DAY OPERATIONAL CONTROL AND/OR THE ABILITY TO MODIFY PROJECT PLANS AND SPECIFICATIONS RELATED TO THE SWPPP. THE PERMIT APPLICATION MUST LIST THE OPERATOR AS A PERMITTEE. SUBCONTRACTORS HIRED BY AND UNDER SUPERVISION OF THE GENERAL CONTRACTOR ARE NOT OPERATORS. [MINN. R. 7090]

"OWNER" MEANS THE PERSON, FIRM, GOVERNMENTAL AGENCY, OR OTHER ENTITY POSSESSING THE TITLE OF THE LAND ON WHICH THE CONSTRUCTION ACTIVITIES WILL OCCUR OR, IF THE CONSTRUCTION ACTIVITY IS FOR A LEASE, EASEMENT, OR MINERAL RIGHTS LICENSE HOLDER, THE PARTY OR INDIVIDUAL IDENTIFIED AS THE LEASE, EASEMENT OR MINERAL RIGHTS LICENSE HOLDER; OR THE CONTRACTING GOVERNMENT AGENCY RESPONSIBLE FOR THE CONSTRUCTION ACTIVITY. [MINN. R. 7090]

"PERMANENT COVER" MEANS SURFACE TYPES THAT WILL PREVENT SOIL FAILURE UNDER EROSIVE CONDITIONS. EXAMPLES INCLUDE: GRAVEL, CONCRETE, PERENNIAL COVER, OR OTHER LANDSCAPED MATERIAL THAT WILL PERMANENTLY ARREST SOIL EROSION. PERMITTEES MUST ESTABLISH A UNIFORM PERENNIAL VEGETATIVE COVER (I.E., EVENLY DISTRIBUTED WITHOUT LARGE BARE AREAS) WITH A DENSITY OF 70 PERCENT OF THE NATIVE BACKGROUND VEGETATIVE COVER ON ALL AREAS NOT COVERED BY PERMANENT STRUCTURES, OR EQUIVALENT PERMANENT STABILIZATION MEASURES. PERMANENT COVER DOES NOT INCLUDE TEMPORARY BMPS SUCH AS WOOD FIBER BLANKET, MULCH, AND ROLLED EROSION CONTROL PRODUCTS. [MINN. R. 7090]

"PERMITTEES" MEANS THE PERSONS, FIRM, GOVERNMENTAL AGENCY, OR OTHER ENTITY IDENTIFIED AS THE OWNER AND OPERATOR ON THE APPLICATION SUBMITTED TO THE MPCA AND ARE RESPONSIBLE FOR COMPLIANCE WITH THE TERMS AND CONDITIONS OF THIS PERMIT. [MINN. R. 7090]

"PROJECT(S)" MEANS ALL CONSTRUCTION ACTIVITY PLANNED AND/OR CONDUCTED UNDER A PARTICULAR PERMIT. THE PROJECT OCCURS ON THE SITE OR SITES DESCRIBED IN THE PERMIT APPLICATION, THE SWPPP AND IN THE ASSOCIATED PLANS, SPECIFICATIONS AND CONTRACT DOCUMENTS. [MINN. R. 7090]

"PUBLIC WATERS" MEANS ALL WATER BASINS AND WATERCOURSES DESCRIBED IN MINN. STAT. SECT. 103G.005 SUBP. 15. [MINN. R. 7090]

"SEDIMENT CONTROL" MEANS METHODS EMPLOYED TO PREVENT SUSPENDED SEDIMENT IN STORMWATER FROM LEAVING THE SITE (E.G. SILT FENCES, COMPOST LOGS AND STORM DRAIN INLET PROTECTION). [MINN. R. 7090]

"STABILIZE", "STABILIZED", "STABILIZATION" MEANS THE EXPOSED GROUND SURFACE HAS BEEN COVERED BY APPROPRIATE MATERIALS SUCH AS MULCH, STAKED SOD, RIPRAP. EROSION CONTROL BLANKET. MATS OR OTHER MATERIAL THAT PREVENTS EROSION FROM OCCURRING. GRASS SEEDING, AGRICULTURAL CROP SEEDING OR OTHER SEEDING ALONE IS NOT STABILIZATION. MULCH MATERIALS MUST ACHIEVE APPROXIMATELY 90 PERCENT GROUND COVERAGE (TYPICALLY 2 TON/ACRE). [MINN. R. 7090]

"STORMWATER" MEANS PRECIPITATION RUNOFF, STORMWATER RUNOFF, SNOWMELT RUNOFF, AND ANY OTHER SURFACE RUNOFF AND DRAINAGE. [MINN. R. 7090]

"STEEP SLOPES" MEANS SLOPES THAT ARE 1:3 (V:H) (33.3 PERCENT) OR STEEPER IN

BMPS AND PERMANENT STORMWATER TREATMENT SYSTEMS. [MINN. R. 7090]

"STORM WATER POLLUTION PREVENTION PLAN (SWPPP)" MEANS A PLAN FOR STORMWATER DISCHARGE THAT INCLUDES ALL REQUIRED CONTENT UNDER IN SECTION 5 THAT DESCRIBES THE EROSION PREVENTION, SEDIMENT CONTROL AND WASTE CONTROL

"SURFACE WATER OR WATERS" MEANS ALL STREAMS, LAKES, PONDS, MARSHES, WETLANDS, RESERVOIRS, SPRINGS, RIVERS, DRAINAGE SYSTEMS, WATERWAYS WATERCOURSES, AND IRRIGATION SYSTEMS WHETHER NATURAL OR ARTIFICIAL, PUBLIC OR PRIVATE, EXCEPT THAT SURFACE WATERS DO NOT INCLUDE STORMWATER TREATMENT SYSTEMS CONSTRUCTED FROM UPLAND. THIS PERMIT DOES NOT CONSIDER STORMWATER TREATMENT SYSTEMS CONSTRUCTED IN WETLANDS AND MITIGATED IN ACCORDANCE WITH SECTION 22 AS SURFACE WATERS. [MINN. R. 7090]

"WATERS OF THE STATE" (AS DEFINED IN MINN. STAT. SECT. 115.01, SUBP. 22) MEANS ALL STREAMS, LAKES, PONDS, MARSHES, WATERCOURSES, WATERWAYS, WELLS, SPRINGS, RESERVOIRS, AQUIFERS, IRRIGATION SYSTEMS, DRAINAGE SYSTEMS AND ALL OTHER BODIES OR ACCUMULATIONS OF WATER, SURFACE OR UNDERGROUND, NATURAL OR ARTIFICIAL, PUBLIC OR PRIVATE, WHICH ARE CONTAINED WITHIN, FLOW THROUGH, OR BORDER UPON THE STATE OR ANY PORTION THEREOF. [MINN. STAT. 115.01, SUBP. 22] "WATER QUALITY VOLUME" MEANS ONE (1) INCH OF RUNOFF FROM THE NET INCREASE IN IMPERVIOUS SURFACES CREATED BY THE PROJECT (CALCULATED AS AN INSTANTANEOUS

VOLUME). [MINN. R. 7090] "WETLANDS" (AS DEFINED IN MINN. R. 7050.0186, SUBP. 1A.B.) MEANS THOSE AREAS THAT ARE INUNDATED OR SATURATED BY SURFACE WATER OR GROUNDWATER AT A FREQUENCY AND DURATION SUFFICIENT TO SUPPORT, AND UNDER NORMAL CIRCUMSTANCES DO SUPPORT, A PREVALENCE OF VEGETATION TYPICALLY ADAPTED FOR LIFE IN SATURATED SOIL CONDITIONS. WETLANDS GENERALLY INCLUDE SWAMPS, MARSHES, BOGS, AND SIMILAR AREAS, CONSTRUCTED WETLANDS DESIGNED FOR WASTEWATER TREATMENT ARE NOT WATERS OF THE STATE. WETLANDS MUST HAVE THE


FOLLOWING ATTRIBUTES: 1. A PREDOMINANCE OF HYDRIC SOILS: AND

[MINN. R. 7050.0186, SUBP. 1A.B]

2. INUNDATED OR SATURATED BY SURFACE WATER OR GROUNDWATER AT A FREQUENCY AND DURATION SUFFICIENT TO SUPPORT A PREVALENCE OF HYDROPHYTIC VEGETATION TYPICALLY ADAPTED FOR LIFE IN A SATURATED SOIL CONDITION: AND

3. UNDER NORMAL CIRCUMSTANCES SUPPORT A PREVALENCE OF SUCH VEGETATION

MAP OF SURFACE WATERS

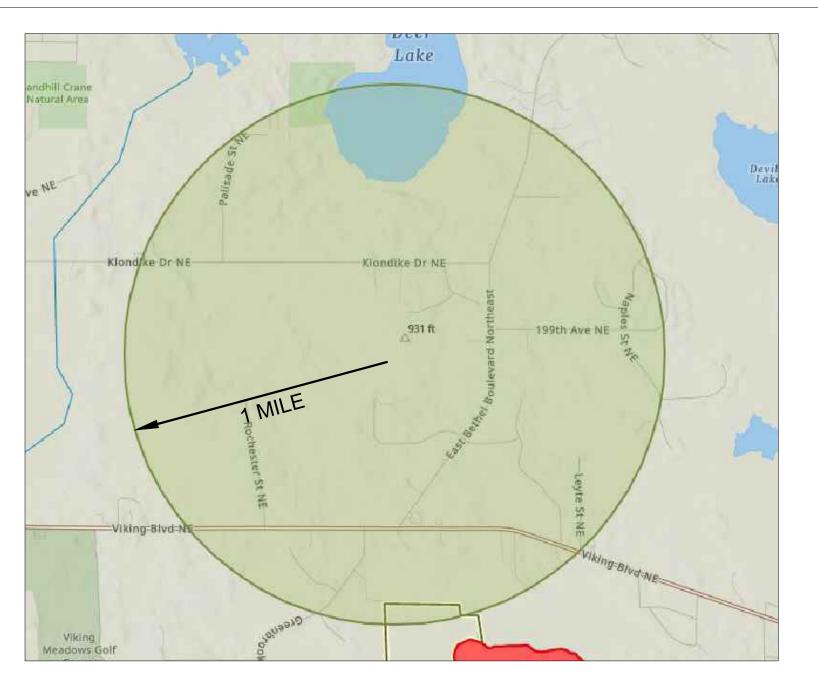

& ENGINEERING


SUITF 110 LINO LAKES, MN 55014 PHONE: (651) 361-8210 FAX: (651) 361-8701

6776 LAKE DRIVE

DRAWN BY: CHECK BY CWP

JOB NO: DATE: 22-2076 11/16/22 - | 2 | E | 4 | E | O | **F** | 8

S:\PLOWE\CAD\23PROJ\2125 HIDDEN PRAIRIE\2125 CAD\2125 BASE 13.DWG Thursday, April 24, 2025 12:16:42 PM

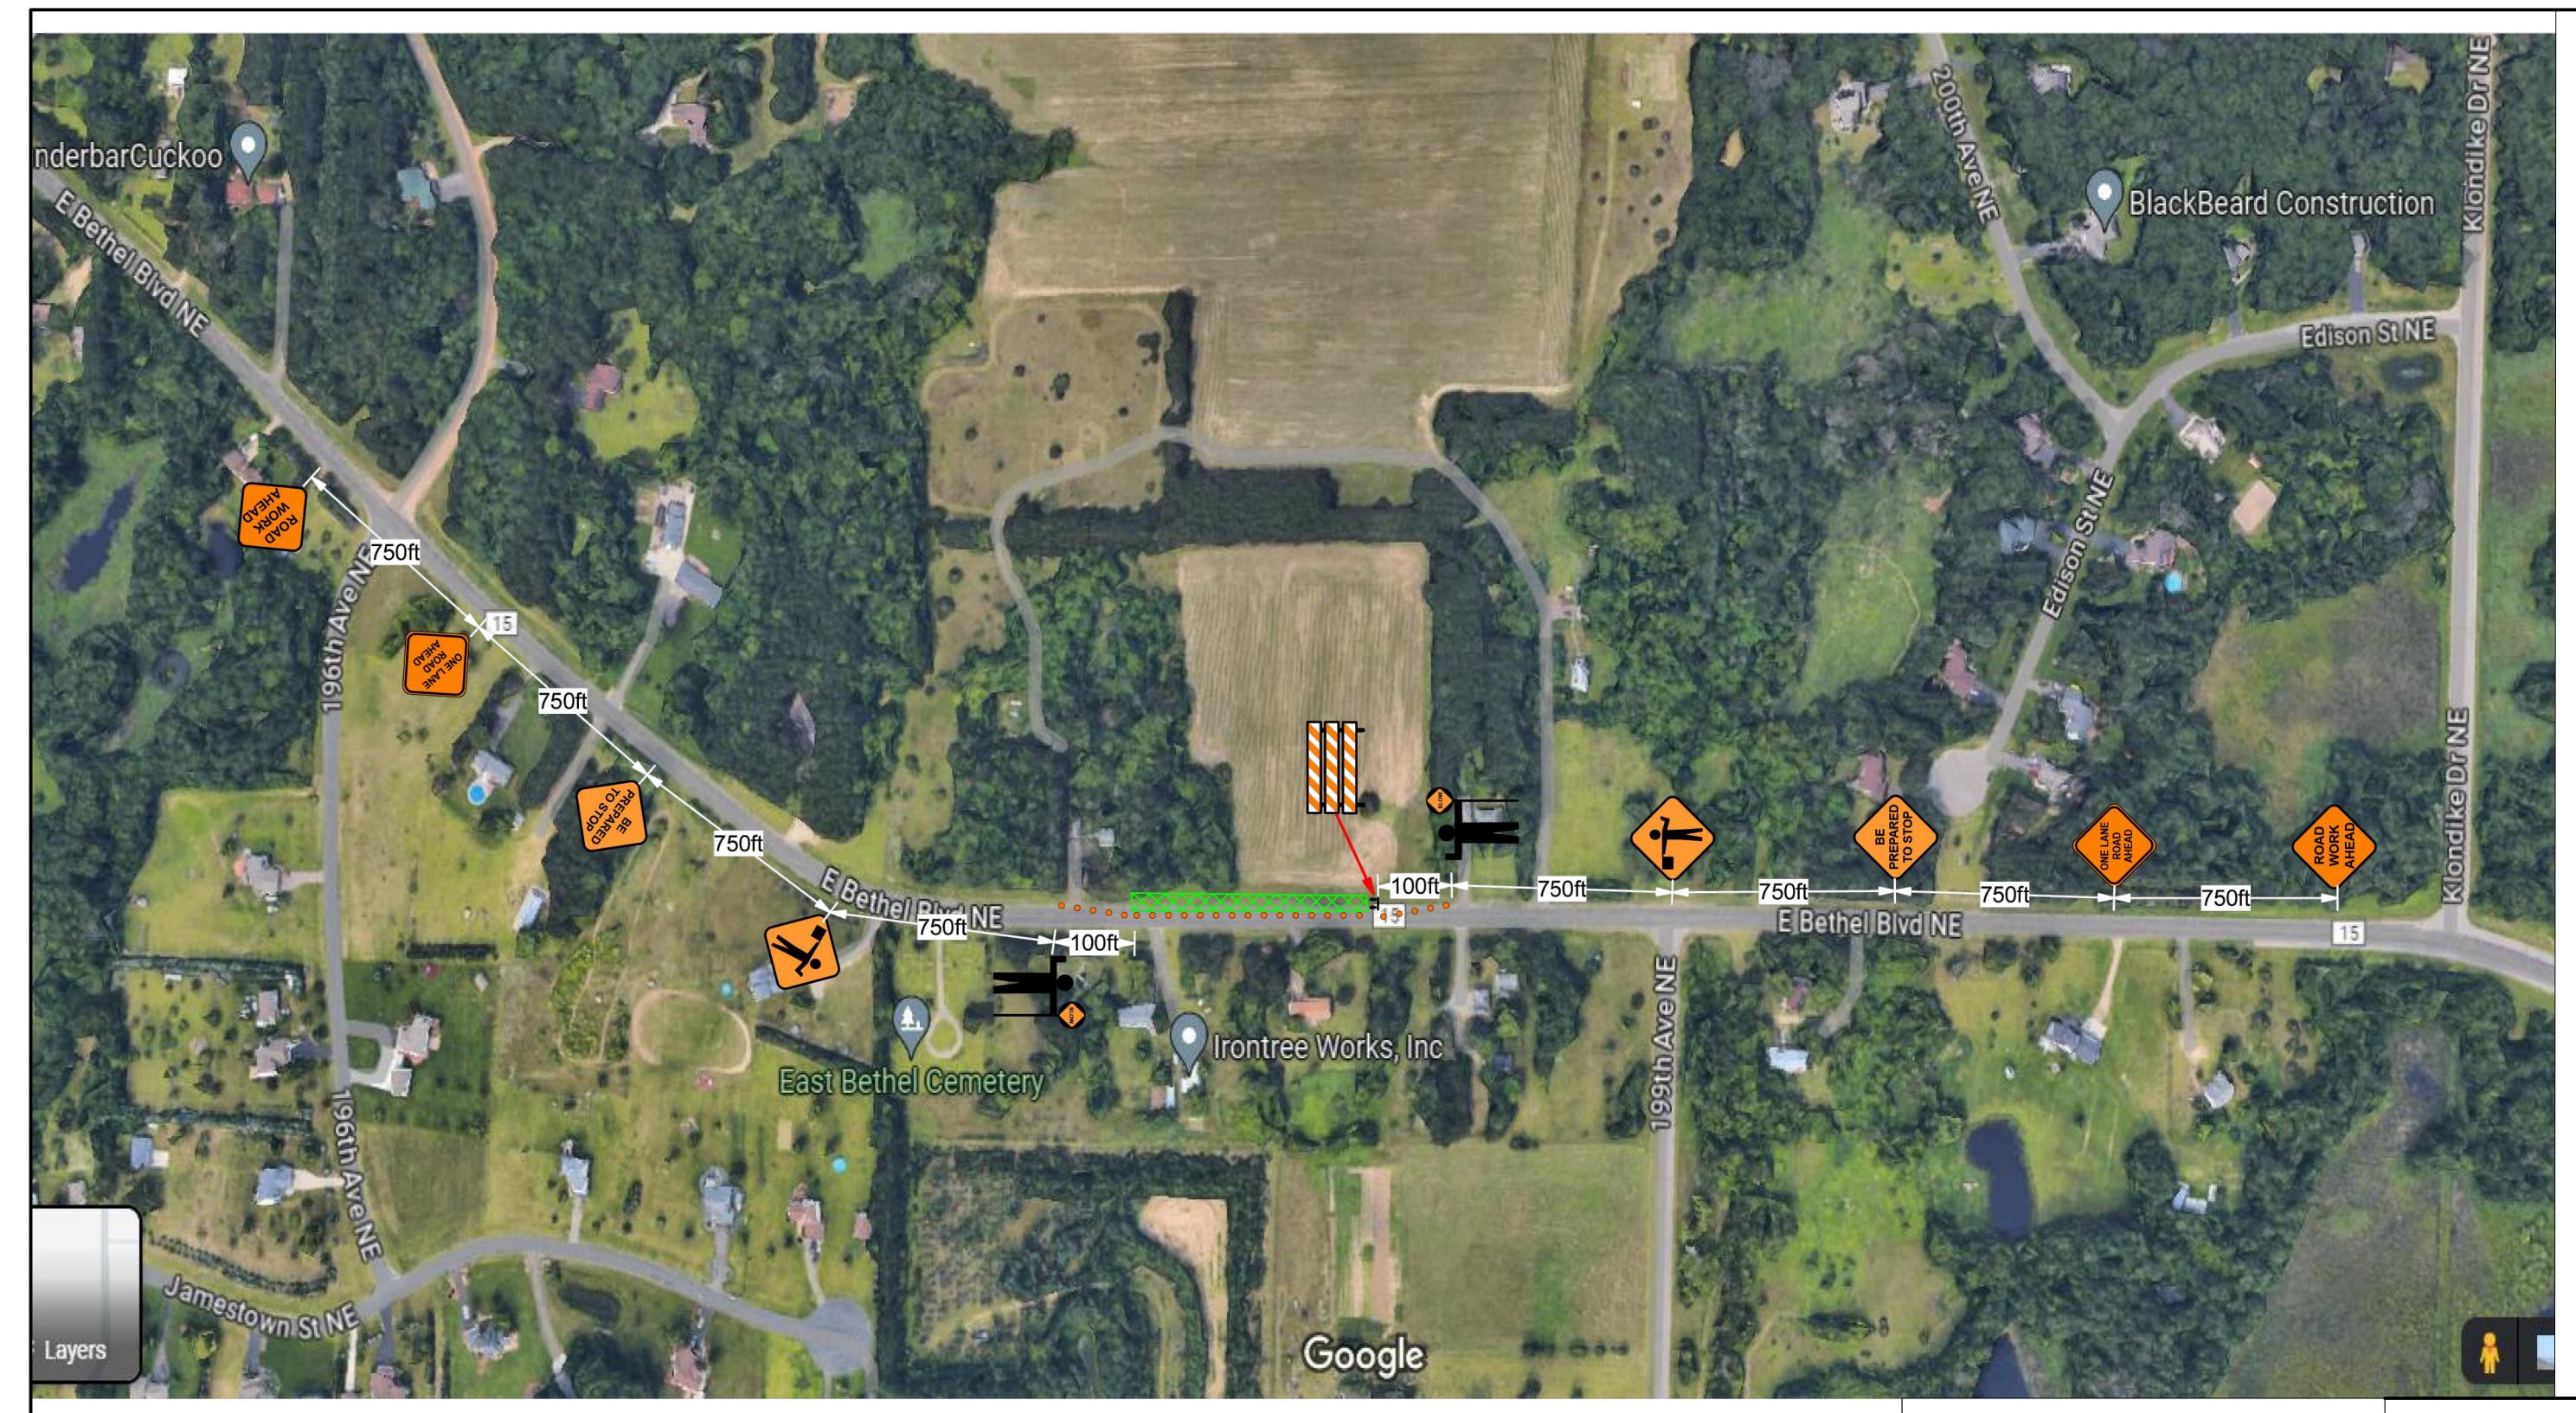

NOTE: ANY SCHEDULING OF EQUIPMENT MUST BE DONE THROUGH WARNING LITES OF MN, INC- FRONT OFFICE 612-521-4200

DIRTWORKS

CONTACT: STEVE S
PHONE:
PROJECT: E BETHAL BVLD & 199TH AVE NE
JOB#
PO#

AUTHOR: JOHN GUZMAN MN TCS CERT #2906 CITY: EAST BETHAL DATE: 2/15/24 SCALE: NONE GOV. AGENCY:

WARNING LITES

4700 LYNDALE AVE N MINNEAPOLIS, MN 55430 TEL: 612-277-4706 FAX: 612-521-0646 jguzman@warninglitesmn.com





I hereby certify that this plan, specification or report was prepared by me or under my direct supervision and that I am a duly Registered Professional Engineer under the laws of the State of Minnesota.

Signature: Michael G. Nelson, PE

Registration No. 26807 FEBRUARY 15, 2024

My Registration Expires June 30, 2024



1700 Technology Drive NE Suite 130 Willmar, MN 56201 (320) 235-1970

CEDAR, MN EAST BETHEL BLVD

TRAFFIC CONTROL

SEC. ----, TWP. ----, R. ----ANOKA COUNTY, MN.

Scale
NO SCALE
Project Number
Sheet Number
1



Highway

Transit

Surveyor

GIS

Fleet

Anoka County TRANSPORTATION DIVISION

Respectful, Innovative, Fiscally Responsible

Joe MacPherson, P.E. Chief Officer, Transportation, County Engineer Jerry Auge, P.E.
Department Director, Assistant County Engineer

EXCAVATOR AND OPERATOR NOTICE

This notice is for all excavators and operators applying for permits involving excavations - your obligations to comply with Minnesota State Statues 216D are attached to this notice.

This notice is a requirement of State Statute 216D.02; Notice to Excavators and Operators.

216D.03

216D.03 NOTIFICATION CENTER.

Subdivision 1. **Participation.** An operator shall participate in and share in the costs of one statewide notification center operated by a vendor selected under subdivision 2.

- Subd. 2. **Establishment of notification center; rules.** (a) The notification center services must be provided by a nonprofit corporation approved in writing by the commissioner. The nonprofit corporation must be governed by a board of directors of up to 20 members, one of whom is the director of the Office of Pipeline Safety. The other board members must represent and be elected by operators, excavators, and other persons eligible to participate in the center. In deciding to approve a nonprofit corporation, the commissioner shall consider whether it meets the requirements of this paragraph and whether it demonstrates that it has the ability to contract for and implement the notification center service.
 - (b) The commissioner shall adopt rules:
- (1) establishing a notification process and competitive bidding procedure for selecting a vendor to provide the notification service;
 - (2) governing the operating procedures and technology needed for a statewide notification center; and
 - (3) setting forth the method for assessing the cost of the service among operators.
- (c) The commissioner shall select a vendor to provide the notification center service. The commissioner may advertise for bids as provided in section 16C.06, subdivisions 1 and 2, and base the selection of a vendor on best value as provided in section 16C.06, subdivision 6. The commissioner shall select and contract with the vendor to provide the notification center service, but all costs of the center must be paid by the operators. The commissioner may at any time appoint a task force to advise on the renewal of the contract or any other matter involving the center's operations.
- (d) An operator may submit a bid and be selected to contract to provide the notification center service under paragraph (a) or (c). The commissioner shall annually review the services provided by the nonprofit corporation approved under paragraph (a) or the vendor selected under paragraph (c).
- Subd. 3. Cooperation with local government. In establishing operating procedures and technology for the statewide notification center, the board of directors or the commissioner must work in cooperation with the League of Minnesota Cities, the Association of Minnesota Counties, and the Township Officers' Association. The purpose of this cooperation is to maximize the participation of local governmental units that issue permits for activities involving excavation to assure that excavators receive notice of and comply with the requirements of sections 216D.01 to 216D.07.
- Subd. 4. **Notice to local government.** The notification center shall provide local governmental units with a master list, by county, of the operators in the county who are participants in the notification center, and the telephone number and mailing address of the notification center.

History: 1987 c 353 s 9; 1997 c 187 art 1 s 15; 1998 c 386 art 2 s 69

216D.04

216D.04 EXCAVATION; LAND SURVEY.

Subdivision 1. **Notice required; contents.** (a) Except in an emergency, an excavator shall and a land surveyor may contact the notification center and provide notice at least 48 hours, excluding Saturdays, Sundays, and holidays and not more than 14 calendar days before beginning any excavation or boundary survey. An excavation or boundary survey begins, for purposes of this requirement, the first time excavation or a boundary survey occurs in an area that was not previously identified by the excavator or land surveyor in the notice.

- (b) The notice may be oral or written, and must contain the following information:
- (1) the name of the individual providing the notice;
- (2) the precise location of the proposed area of excavation or survey;
- (3) the name, address, and telephone number of the individual or individual's company;
- (4) the field telephone number, if one is available;
- (5) the type and extent of the activity;
- (6) whether or not the discharge of explosives is anticipated;
- (7) the date and time when the excavation or survey is to commence; and
- (8) the estimated duration of the activity.

Subd. 1a. **Plans for excavation.** (a) Any person, prior to soliciting bids or entering into a contract for excavation, shall provide a proposed notice to the notification center to obtain from the affected operators of underground facilities the type, size, and general location of underground facilities. Affected operators shall provide the information within 15 working days. An operator who provides information to a person who is not a unit of government may indicate any portions of the information which are proprietary and may require the person to provide appropriate confidentiality protection. The information obtained from affected operators must be submitted on the final drawing used for the bid or contract and must depict the utility quality level of that information. This information must be updated not more than 90 days before completion of the final drawing used for the bid or contract.

- (b) This subdivision does not apply to bids and contracts for:
- (1) routine maintenance of underground facilities or installation, maintenance, or repair of service lines;
- (2) excavation for operators of underground facilities performed on a unit of work or similar basis; or
- (3) excavation for home construction and projects by home owners.
- (c) A person required by this section to show existing underground facilities on its drawings shall conduct one or more preliminary design meetings during the design phase to communicate the project design and coordinate utility relocation. Affected facility operators shall attend these meetings or make other arrangements to provide information.
- (d) A person required by this section to show existing underground facilities on its drawings shall conduct one or more preconstruction meetings to communicate the project design and coordinate utility relocation. Affected facility operators and contractors shall attend these meetings or make other arrangements to provide information.

- (e) This subdivision does not affect the obligation to provide a notice of excavation as required under subdivision 1.
- Subd. 2. **Duties of notification center; regarding notice.** The notification center shall assign an inquiry identification number to each notice and retain a record of all notices received for at least six years. The center shall immediately transmit the information contained in a notice to every operator that has an underground facility in the area of the proposed excavation or boundary survey.
- Subd. 3. **Locating underground facility; operator.** (a) Prior to the excavation start time on the notice, an operator shall locate and mark or otherwise provide the approximate horizontal location of the underground facilities of the operator and provide readily available information regarding the operator's abandoned and out-of-service underground facilities as shown on maps, drawings, diagrams, or other records used in the operator's normal course of business, without cost to the excavator. The excavator shall determine the precise location of the underground facility, without damage, before excavating within two feet of the marked location of the underground facility.
- (b) Within 96 hours or the time specified in the notice, whichever is later, after receiving a notice for boundary survey from the notification center, excluding Saturdays, Sundays, and holidays, unless otherwise agreed to between the land surveyor and operator, an operator shall locate and mark or otherwise provide the approximate horizontal location of the underground facilities of the operator, without cost to the land surveyor.
- (c) For the purpose of this section, the approximate horizontal location of the underground facilities is a strip of land two feet on either side of the underground facilities.
- (d) Markers used to designate the approximate location of underground facilities must follow the current color code standard used by the American Public Works Association.
- (e) If the operator cannot complete marking of the excavation or boundary survey area before the excavation or boundary survey start time stated in the notice, the operator shall promptly contact the excavator or land surveyor.
- (f) After December 31, 1998, operators shall maintain maps, drawings, diagrams, or other records of any underground facility abandoned or out-of-service after December 31, 1998.
- (g) An operator or other person providing information pursuant to this subdivision is not responsible to any person, for any costs, claims, or damages for information provided in good faith regarding abandoned, out-of-service, or private or customer-owned underground facilities.
- Subd. 4. Locating underground facility; excavator or land surveyor. (a) The excavator or land surveyor shall determine the precise location of the underground facility, without damage, before excavating within two feet on either side of the marked location of the underground facility.
- (b) If the excavator or land surveyor cancels the excavation or boundary survey, the excavator or land surveyor shall cancel the notice through the notification center.
- (c) The notice is valid for 14 calendar days from the start time stated on the notice. If the activity will continue after the expiration time, then the person responsible for the activity shall serve an additional notice at least 48 hours, excluding Saturdays, Sundays, and holidays, before the expiration time of the original notice, unless the excavator makes arrangements with the operators affected to periodically verify or refresh the marks, in which case the notice is valid for six months from the start time stated on the notice.

MINNESOTA STATUTES 2022

216D.04

(d) The excavator is responsible for reasonably protecting and preserving the marks until no longer required for proper and safe excavation near the underground facility. If the excavator has reason to believe the marks are obliterated, obscured, missing, or incorrect, the excavator shall notify the facility operator or notification center in order to have an operator verify or refresh the marks.

History: 1987 c 353 s 10; 1992 c 493 s 5; 1993 c 341 art 1 s 21; 1997 c 196 s 1; 1998 c 348 s 1-3; 2004 c 163 s 2-6

MINNESOTA STATUTES 2022

216D.05

216D.05 PRECAUTIONS TO AVOID DAMAGE.

An excavator shall:

1

- (1) plan the excavation to avoid damage to and minimize interference with underground facilities in and near the construction area;
 - (2) use white markings for proposed excavations except where it can be shown that it is not practical;
- (3) maintain a clearance between an underground facility and the cutting edge or point of any mechanized equipment, considering the known limit of control of the cutting edge or point to avoid damage to the facility;
- (4) provide support for underground facilities in and near the construction area, including during backfill operations, to protect the facilities; and
 - (5) conduct the excavation in a careful and prudent manner.

History: 1987 c 353 s 11; 1998 c 348 s 4; 2004 c 163 s 7

MINNESOTA STATUTES 2022

216D.06

216D.06 DAMAGE TO FACILITY.

Subdivision 1. **Notice; repair.** (a) If any damage occurs to an underground facility or its protective covering, the excavator shall notify the operator promptly. When the operator receives a damage notice, the operator shall promptly dispatch personnel to the damage area to investigate. If the damage results in the escape of any flammable, toxic, or corrosive gas or liquid or endangers life, health, or property, the excavator responsible shall immediately notify the operator and the 911 public safety answering point, as defined in section 403.02, subdivision 19, and take immediate action to protect the public and property. The excavator shall also attempt to minimize the hazard until arrival of the operator's personnel or until emergency responders have arrived and completed their assessment. The 911 public safety answering point shall maintain a response plan for notifications generated by this section.

- (b) An excavator shall delay backfilling in the immediate area of the damaged underground facilities until the damage has been investigated by the operator, unless the operator authorizes otherwise. The repair of damage must be performed by the operator or by qualified personnel authorized by the operator.
- (c) An excavator who knowingly damages an underground facility, and who does not notify the operator as soon as reasonably possible or who backfills in violation of paragraph (b), is guilty of a misdemeanor.
- Subd. 2. **Cost reimbursement.** (a) If an excavator damages an underground facility, the excavator shall reimburse the operator for the cost of necessary repairs, and for a pipeline the cost of the product that was being carried in the pipeline and was lost as a direct result of the damage.
- (b) Reimbursement is not required if the damage to the underground facility was caused by the sole negligence of the operator or the operator failed to comply with section 216D.04, subdivision 3.
- Subd. 3. **Prima facie evidence of negligence.** It is prima facie evidence of the excavator's negligence in a civil court action if damage to the underground facilities of an operator resulted from excavation, and the excavator failed to give an excavation notice under section 216D.04 or provide support as required by section 216D.05.

History: 1987 c 353 s 12: 1999 c 43 s 1

MINNESOTA STATUTES 2022

216D.07

216D.07 EFFECT ON LOCAL ORDINANCES.

- (a) Sections 216D.01 to 216D.07 do not affect or impair local ordinances, charters, or other provisions of law requiring permits to be obtained before excavating.
- (b) A person with a permit for excavation from the state or a public agency is subject to sections 216D.01 to 216D.07. The state or public agency that issued a permit for excavation is not liable for the actions of an excavator who fails to comply with sections 216D.01 to 216D.07.

History: 1987 c 353 s 13

CHAPTER 7560

OFFICE OF PIPELINE SAFETY EXCAVATION NOTICE SYSTEM

7560.0100	DEFINITIONS.

- 7560.0125 ABANDONED AND OUT-OF-SERVICE FACILITIES.
- 7560.0150 PUBLIC RIGHT-OF-WAY MAPPING AND INSTALLATION.
- 7560.0225 EXCAVATOR RESPONSIBILITIES REGARDING A LOCATE.
- 7560.0250 LOCATE STANDARDS.
- 7560.0300 OPERATOR PARTICIPATES AND SHARES COSTS.
- 7560.0325 EMERGENCY EXCAVATION NOTICES.
- 7560.0350 EXCAVATION NOTICE REQUESTING MEET.
- 7560.0375 LOCATING A SERVICE LATERAL.
- 7560.0400 CITATIONS.
- 7560.0500 RESPONSE OPTIONS.
- 7560.0600 DIRECTOR REVIEW.
- 7560.0700 CONSENT ORDER.
- 7560.0800 CIVIL PENALTIES.

7560.0100 DEFINITIONS.

- Subpart 1. **Scope.** The terms used in this chapter have the meanings given them. Terms not defined in this part have the meanings given them in Minnesota Statutes, section 216D.01.
- Subp. 1a. **Abandoned facility.** "Abandoned facility" means an underground facility that is no longer in service and is physically disconnected from a portion of the operating facility that is in use or still carries service. An abandoned facility has been deemed abandoned by the operator.
- Subp. 2. **Director.** "Director" means the director of the Office of Pipeline Safety of the Minnesota Department of Public Safety.
- Subp. 3. **Good cause to believe.** "Good cause to believe" means grounds put forth in good faith that are not arbitrary, irrational, unreasonable, or irrelevant and that are based on at least one of the following sources:
 - A. information from a person;
- B. facts supplied by the notification center defined in Minnesota Statutes, section 216D.01, subdivision 8;
 - C. facts of which the director or an agent of the director has personal knowledge; and
 - D. information provided by excavators or operators.
 - Subp. 4. Locate. "Locate" means an operator's markings of an underground facility.
 - Subp. 5. [Renumbered as subp 8]
 - Subp. 5a. [Renumbered as subp 9]
 - Subp. 6. [Renumbered as subp 11]

- Subp. 7. **Meet.** When used as a noun in this chapter, "meet" refers to a meeting at the site of proposed excavation requested at the time of notice by the excavator with all affected underground facility operators to further clarify the precise geographic location of excavation, schedule locating, propose future contacts, and share other information concerning the excavation and facilities.
- Subp. 8. **Office.** "Office" means the Office of Pipeline Safety of the Minnesota Department of Public Safety.
- Subp. 9. **Out-of-service facility.** "Out-of-service facility" means an underground facility that is no longer maintained and is not intended for future use, but has not been deemed abandoned. An out-of-service facility may still be connected to a portion of the operating facility that is in use or still carries service.
- Subp. 10. **Public right-of-way.** "Public right-of-way" means the area on, below, or above a public roadway, highway, street, cartway, bicycle lane, and sidewalk in which a government unit has an interest, including other rights-of-way dedicated for travel purposes and utility easements of government units.
- Subp. 11. **Remuneration.** "Remuneration" means direct or indirect compensation or consideration paid to the person or the person's agent, employer, employee, subcontractor, or contractor. A person who excavates as part of the person's duties as an employee, employer, agent, subcontractor, or contractor is considered to be acting for remuneration.
- Subp. 12. **Service lateral.** "Service lateral" means an underground facility that is used to transmit, distribute, or furnish gas, electricity, communications, or water from a common source to an end-use customer. A service lateral is also an underground facility that is used in the removal of wastewater from a customer's premises.

Statutory Authority: MS s 14.06; 216D.08; 299F.56; 299F.60; 299F.641; 299J.04

History: 16 SR 135; 24 SR 448; 29 SR 1503

Published Electronically: July 20, 2005

7560.0125 ABANDONED AND OUT-OF-SERVICE FACILITIES.

- Subpart 1. **Duty of operators to provide readily available information.** Operators shall provide readily available information, as shown on maps, drawings, diagrams, or other records used in the normal course of business, on the approximate location of abandoned and out-of-service facilities to an excavator by the excavation date and time noted on the excavation or location notice unless otherwise agreed between the excavator and the operator. An operator fulfills an obligation to provide information on these facilities by doing one or more of the following:
- A. locating and marking the approximate location of the facility according to the current color code standard used by the American Public Works Association, as required in Minnesota Statutes, section 216D.04, subdivision 3, with an abandoned or out-of-service facility identified by an uppercase A surrounded by a circle;
 - B. providing informational flags at the area of proposed excavation;
 - C. communicating information verbally; or
 - D. providing copies of maps, diagrams, or records.
 - Subp. 2. **Duty to notify operator.** An excavator shall notify the operator:

- 3
- A. before moving, removing, or otherwise altering a facility that is thought to be abandoned or out of service; or
- B. if damage to the facility occurs, pursuant to Minnesota Statutes, section 216D.01, subdivision 2.
- Subp. 3. **Verification of abandoned or out-of-service facility.** Upon receipt of notification by an excavator pursuant to subpart 2, an operator shall verify that an underground facility is abandoned or out of service, by either reference to installation records, testing, or other comparable standard of verification, before an excavator is allowed to move, remove, or otherwise alter an underground facility.
- Subp. 4. **Liability.** An operator providing information pursuant to Minnesota Statutes, section 216D.04, subdivision 3, is not responsible to any person for any costs, claims, or damages for information provided in good faith regarding abandoned and out-of-service underground facilities.

Statutory Authority: MS s 14.06; 216D.08; 299J.04; 299F.60

History: 24 SR 448

Published Electronically: July 20, 2005

7560.0150 PUBLIC RIGHT-OF-WAY MAPPING AND INSTALLATION.

- Subpart 1. **Duty of operator to map.** After December 31, 2005, an operator shall maintain a map, a diagram, a drawing, or geospatial information regarding the location of its underground facility within a public right-of-way installed after that date.
- Subp. 2. **Duty to install locating wire.** After December 31, 2005, an operator shall install a locating wire or have an equally effective means of marking the location of each nonconductive underground facility within a public right-of-way installed after that date. This requirement does not apply when making minor repairs to an existing nonconductive facility. As applied to this chapter, "minor repairs" means repairs to or partial replacement of portions of existing service laterals located within a public right-of-way for purposes of routine maintenance and upkeep.

Statutory Authority: MS s 299J.04

History: 29 SR 1503

Published Electronically: July 20, 2005

7560.0200 [Repealed, 24 SR 448]

Published Electronically: July 20, 2005

7560.0225 EXCAVATOR RESPONSIBILITIES REGARDING A LOCATE.

Subpart 1. [Repealed, 29 SR 1503]

Subp. 2. **Responsibility to protect and preserve.** The excavator is responsible for reasonably protecting and preserving a locate until no longer required for proper and safe excavation near the underground facility. If the excavator has reason to believe a locate is obliterated, obscured, missing, or incorrect, the excavator shall notify the facility operator or notification center in order to have an operator verify, refresh, or re-mark the locate.

Subp. 3. **Use of locate.** A locate is valid for 14 days from the excavation commencement time stated on the excavation or location notice, unless the excavator has made previous arrangements with the operators affected to periodically verify, refresh, or re-mark the locate.

Statutory Authority: MS s 14.06; 216D.08; 299J.04; 299F.60

History: 24 SR 448; 29 SR 1503

Published Electronically: July 20, 2005

7560,0250 LOCATE STANDARDS.

- Subpart 1. **Facility locate.** Unless otherwise agreed to between the excavator and operator, an operator shall locate an underground facility using stakes, flags, paint, or other suitable materials in varying combinations dependent upon the surface. The locate must be in sufficient detail to clearly identify the approximate route of the underground facility. The locate must also include:
- A. name, abbreviation, or logo of the operator when more than one operator listed on the notice uses the same color markings;
 - B. width of the underground facility if it is greater than eight inches; and
 - C. number of underground facilities if greater than one.
- Subp. 2. **Operator duties in no conflict situation.** After December 31, 2005, an operator who receives notice and determines that an underground facility is not in conflict with the proposed excavation shall complete one or more of the following:
- A. mark the area "NO" followed by the operator's name, abbreviation, or logo in the color code of the underground facility not in conflict;
 - B. place a clear plastic flag at the area that:
- (1) states "N/C" or "NO CONFLICT" in lettering matching the color code of the underground facility that is not in conflict; and
- (2) includes the operator's name, abbreviation, or logo, the date, a contact telephone number, and the ticket number; or
- C. contact the notification center through procedures required by the notification center and indicate that there are no underground facilities in conflict with the proposed excavation and that no markings or flags were left at the proposed excavation site.
- Subp. 3. **Placement of flags or markings.** If using N/C (no conflict) flags or markings pursuant to subpart 2, an operator shall place the flags or markings in a location that can be readily observed by an excavator. When an area of proposed excavation is delineated by the use of white markings, an operator shall place the N/C flags or markings within, or as near as practicable to, the delineated area.
- Subp. 4. **Duties of notification center.** After December 31, 2005, the notification center shall make the information received under subpart 2 available to the excavator before the start date and time on the notice. The notification center may fulfill this requirement by making the information accessible through one or more Internet addresses, by transmitting the information to a continuously working facsimile machine maintained by the excavator, or by other methodology developed by the notification center. The notification center shall make available the information received by operators pursuant to this section through

EXCAVATION NOTICE SYSTEM 7560.0325

an electronic means. The notification center is not required by this subpart to contact an excavator verbally via telephone.

Statutory Authority: MS s 299J.04

History: 29 SR 1503

Published Electronically: July 20, 2005

7560.0300 OPERATOR PARTICIPATES AND SHARES COSTS.

An operator shall participate in and share the costs of the one call excavation notice system by:

- A. submitting the information required by the notification center to allow the center to notify the operator of excavation activity;
 - B. updating the information provided to the notification center on a timely basis;
- C. installing and paying for equipment reasonably requested by the notification center to facilitate receipt of notice of excavation from the center;
 - D. paying the costs charged by the notification center on a timely basis; and
- E. receiving and responding to excavation notices, including emergency notices, as required by Minnesota Statutes, chapter 216D.

Statutory Authority: MS s 14.06; 216D.08; 299F.56; 299F.641

History: 16 SR 135

Published Electronically: July 20, 2005

7560.0325 EMERGENCY EXCAVATION NOTICES.

- Subpart 1. **Duty of excavator to provide notice.** An excavator shall provide notice to the notification center before commencing an emergency excavation, unless subpart 2 applies. All emergency notices, regardless whether made prior to excavation, must be verbal or in a manner accepted by the notification center. In addition to the information required by the notification center, the notice must also contain:
 - A. a description of the situation requiring the emergency excavation;
 - B. the precise location of the proposed area of the emergency excavation;
- C. at least one continuously staffed telephone number where the excavator can be contacted by the operator throughout the emergency; and
 - D. the excavation start date and time if the need for excavation is not immediate.
- Subp. 2. **Excavating before notice.** If an emergency is such that providing notice or waiting for an operator would result in an undue risk to life, health, or significant loss of property, the excavator may excavate without providing prior notice or waiting for an operator to mark an underground facility. In this situation, the excavator shall provide notice as soon as practicable and take all reasonable precautions to avoid or minimize damage. Excavation prior to notice under this subpart does not relieve an excavator from any responsibility for damage to an underground facility pursuant to Minnesota Statutes, section 216D.06.
- Subp. 3. **Emergency notice requesting immediate response.** Upon receiving an emergency excavation notice requesting an immediate response, an operator shall:

5

- 6
- A. attempt to contact the excavator within one hour at the telephone number provided in subpart 1, item C, to provide any information concerning facilities at or near the area of excavation including an anticipated response time; and
 - B. locate and mark the underground facility within three hours of notice unless:
 - (1) otherwise agreed between the parties;
- (2) the operator notifies the excavator that not locating does not present an immediate danger to life or health, or a significant loss of property; or
- (3) there is an event or situation that cannot be reasonably anticipated or controlled by the operator.
- Subp. 4. **Emergency notice requesting scheduled response.** Upon receiving an emergency excavation notice that does not require an immediate response, and before the scheduled excavation start date and time, an operator shall:
 - A. locate and mark the underground facility, unless otherwise agreed between the parties; or
- B. notify the excavator at the telephone number provided in subpart 1, item C, that there is not an underground facility within the area of proposed excavation.

For purposes of this subpart, a requested start time of three hours or less from the time notice is provided to the center is considered an emergency notice requesting immediate response under subpart 3.

Statutory Authority: MS s 299J.04

History: 29 SR 1503

Published Electronically: July 20, 2005

7560.0350 EXCAVATION NOTICE REQUESTING MEET.

- Subpart 1. **Excavator duties.** When requesting a meet through the notification center, an excavator must provide at least one contact name and telephone number to assist in facilitating the meet. An excavator shall contact the notification center to cancel or reschedule the meet and the notification center shall relay this information to the affected operators. When a meet is requested, an excavator's notice must include the entire geographic area of the proposed excavation and the specific location of the meet. This part does not relieve an excavator from the duty to provide a precise geographic location of the proposed area of excavation, or to use white markings except where it can be shown that to do so is not practical.
- Subp. 2. **Operator duties.** When a meet is requested, an affected operator shall make a reasonable effort to attend the meet at the proposed date and time, or contact the excavator before the meet and reschedule for a mutually agreed date and time.
- Subp. 3. **Excavation start date and time.** When a meet is requested, the meet date and time must be at least 48 hours after notice is provided, excluding Saturdays, Sundays, and holidays, and the excavation start date and time must be at least 24 hours after the proposed meet date and time specified on the notice, excluding Saturdays, Sundays, and holidays. This subpart does not apply if these matters are provided for in a written agreement with all affected operators.
- Subp. 4. **Meet request documentation.** An excavator shall maintain written documentation of each meet with an underground facility operator or representative. This documentation must be kept for the duration of the excavation conducted under the notice. The documentation must include:

EXCAVATION NOTICE SYSTEM 7560.0400

- A. the date and time of each meet;
- B. the names, company affiliations, and contact information of the attendees of each meet;
- C. a diagram, sketch, or description of the precise excavation locations, dates, and times; and
- D. the agreed schedule of any future meets or communications.

Statutory Authority: MS s 299J.04

History: 29 SR 1503

Published Electronically: July 20, 2005

7560.0375 LOCATING A SERVICE LATERAL.

Subpart 1. **Operator duties.** Unless otherwise agreed, an underground facility operator shall locate a service lateral before the start date and time on the notice and in accordance with items A through C:

- A. An operator of a natural gas, propane, or electric facility shall locate a service lateral up to the meter or the connection to a customer's underground facility, whichever is closer to the end-use customer. If the meter or connection to the customer's underground facility is within a public right-of-way, at a minimum the operator shall locate that portion of the service lateral within the public right-of-way up to the point where the service lateral first leaves the public right-of-way.
- B. An operator of a communication facility shall locate a service lateral up to the entry of the first building. If the service lateral does not enter a building, the operator shall locate up to the utilization equipment, fence, or wall that surrounds the equipment.
- C. After December 31, 2005, an operator of a sewage or water facility, at a minimum, shall locate that portion of the service lateral within a public right-of-way installed after that date up to the point where the service lateral first leaves the public right-of-way. The operator shall either locate or provide information as shown on maps, drawings, diagrams, or other records, on the location of a sewer or water service lateral installed before January 1, 2006. If no information is available on a sewer or water service lateral installed before January 1, 2006, then notifying the excavator that no information exists fulfills the requirements of this section.
- Subp. 2. **Exception.** An operator is not required to locate a service lateral of a customer who currently participates in the statewide notification system, provided the customer and operator mutually agree that the customer will assume locate responsibilities. The agreement must be in writing.

Statutory Authority: MS s 299J.04

History: 29 SR 1503

Published Electronically: July 20, 2005

7560.0400 CITATIONS.

Subpart 1. **Notice of violation.** The office shall issue a notice of probable violation when the office has good cause to believe a violation of Minnesota Statutes, sections 216D.01 to 216D.09 or this chapter has occurred.

Subp. 2. Contents of notice of violation. A notice of violation must include:

A. a statement of the statute or rule allegedly violated by the person and a description of the evidence on which the allegation is based;

8

- B. notice of response options available to the person cited;
- C. notice that the person has 30 days in which to respond;
- D. notice that failure to respond within 30 days precludes administrative review under this chapter; and
- E. if a civil penalty is proposed, the amount of the proposed civil penalty and the maximum civil penalty applicable under law.
- Subp. 3. Receipt of notice. The notice of violation is deemed received three days after mailing to the person's last known address.

Statutory Authority: MS s 14.06; 216D.08; 299F.56; 299F.60; 299F.641; 299J.04

History: 16 SR 135; 24 SR 448

Published Electronically: July 20, 2005

7560.0500 RESPONSE OPTIONS.

The person shall respond to the notice of violation in the following way:

- A. When the notice contains a proposed compliance order, the person shall:
 - (1) agree to the proposed compliance order;
 - (2) request the execution of a consent order;
- (3) object to the proposed compliance order and submit written explanations, information, or other materials in answer to the allegations in the notice; or
- (4) request the office to initiate a hearing under Minnesota Statutes, sections 14.50 to 14.69.
 - B. When the notice contains a proposed civil penalty, the person shall:
 - (1) pay the penalty and close the case;
 - (2) submit an offer in compromise of the proposed civil penalty;
- (3) submit a written explanation, information, or other material in answer to the allegations or in mitigation of the proposed civil penalty; or
- (4) request the office to initiate a hearing under Minnesota Statutes, sections 14.50 to 14.69.
- C. Failure to respond in writing within 30 days precludes administrative review under this chapter. A final order will be issued and penalties will be forwarded for collection.

Statutory Authority: MS s 14.06; 216D.08; 299F.56; 299F.60; 299F.641; 299J.04

History: 16 SR 135; 24 SR 448

Published Electronically: July 20, 2005

7560.0600 DIRECTOR REVIEW.

If the person objects to the proposed civil penalty or compliance order and submits written explanations, information, or other materials in response to a notice of violation, within the time specified in part 7560.0500, the director shall review the submissions and determine whether to negotiate further, to change or withdraw the notice of violation, or to initiate a hearing under Minnesota Statutes, sections 14.50 to 14.69.

Statutory Authority: MS s 14.06; 216D.08; 299F.56; 299F.60; 299F.641; 299J.04

History: 16 SR 135; 24 SR 448

Published Electronically: July 20, 2005

7560.0700 CONSENT ORDER.

An executed consent order must contain:

- A. an admission by the person of the jurisdictional facts;
- B. a waiver of further procedural steps and the right to seek judicial or administrative review or otherwise challenge or contest the validity of the consent order; and
- C. an agreement that the notice of violation may be used to construe the terms of the consent order.

Statutory Authority: MS s 14.06; 216D.08; 299F.56; 299F.641

History: 16 SR 135

Published Electronically: July 20, 2005

7560.0800 CIVIL PENALTIES.

Subpart 1. **Proceedings against excavators.** When the office has good cause to believe that an excavator is engaging or has engaged in conduct that violates Minnesota Statutes, section 216D.04, subdivision 1, 2, or 3; 216D.05, clause (1), (2), (3), or (4); or 216D.06, subdivision 1, or a rule adopted under Minnesota Statutes, section 216D.08, subdivision 4, the office, if appropriate, shall negotiate a civil penalty under Minnesota Statutes, section 216D.08, subdivision 2. A penalty imposed under Minnesota Statutes, section 216D.08, is subject to the contested case and judicial review provisions of Minnesota Statutes, chapter 14. An operator who engages or has engaged in excavation that violates Minnesota Statutes, chapter 216D, is subject to the proceedings specified in subpart 2 and is subject to the penalties specified in subpart 4, item B or C.

- Subp. 2. **Proceedings against underground facility operators.** The office may negotiate a civil penalty under item A or B.
- A. When the office has good cause to believe that an underground facility operator, other than an operator set forth in item B, is engaging or has engaged in conduct that violates Minnesota Statutes, sections 216D.01 to 216D.07, or a rule adopted under Minnesota Statutes, section 216D.08, subdivision 4, the office, if appropriate, shall negotiate a civil penalty under Minnesota Statutes, section 216D.08, subdivision 2. A penalty imposed under Minnesota Statutes, section 216D.08, is subject to the contested case and judicial review provisions of Minnesota Statutes, chapter 14.

7560.0800 EXCAVATION NOTICE SYSTEM

- B. When the office has good cause to believe that an operator who engages in the transportation of gas or hazardous liquids or who owns or operates a gas or hazardous liquid pipeline facility is engaging or has engaged in conduct that violates Minnesota Statutes, sections 299F.56 to 299F.641, or a rule adopted under Minnesota Statutes, section 299F.60, subdivision 5, the office, if appropriate, shall negotiate a civil penalty under Minnesota Statutes, section 299F.60, subdivision 2. A penalty imposed under Minnesota Statutes, section 299F.60, is subject to the contested case and judicial review provisions of Minnesota Statutes, chapter 14.
- Subp. 3. **Assessment considerations.** In assessing a civil penalty under this part, the office shall consider the following factors:
 - A. the nature, circumstances, and gravity of the violation;
 - B. the degree of the person's culpability;
 - C. the person's history of previous offenses;
 - D. the person's ability to pay;
 - E. good faith on the part of the person in attempting to remedy the cause of the violation;
 - F. the effect of the penalty on the person's ability to continue in business; and
 - G. past reports of damage to an underground facility by a person.
- Subp. 4. **Maximum penalties.** For the purposes of this part, penalties imposed under this part must not exceed the limits in items A to C.
- A. Penalties imposed against excavators must not exceed \$1,000 for each violation per day of violation.
- B. Penalties imposed against underground facility operators, other than an operator set forth in item C, must not exceed \$1,000 for each violation per day of violation.
- C. Penalties imposed against an operator who engages in the transportation of gas or hazardous liquids or who owns or operates a gas or hazardous liquid pipeline facility must not exceed \$10,000 for each violation for each day that the violation persists, except that the maximum civil penalty must not exceed \$500,000 for a related series of violations.
- Subp. 5. **Payment procedure.** The person shall pay a civil penalty that has been proposed, assessed, or compromised by submitting to the office a check or money order in the correct amount, payable to the commissioner of public safety.

Statutory Authority: MS s 14.06; 216D.08; 299F.56; 299F.60; 299F.641; 299J.04

History: 16 SR 135; 24 SR 448

Published Electronically: July 20, 2005



Certificate Of Completion

Envelope Id: 52D3C1DA-EF2A-43B8-A2D8-2EE43FDB1B05

Subject: Steve Strandlund - ROW Permit Application

Source Envelope:

Document Pages: 37 Signatures: 2 Initials: 1 Certificate Pages: 4 **Highway Permits**

AutoNav: Enabled

Envelopeld Stamping: Enabled

Time Zone: (UTC-06:00) Central Time (US & Canada)

Envelope Originator:

Status: Completed

Anoka County Government Center

2100 3rd Avenue Anoka, MN 55303

Location: DocuSign

highwaypermits@anokacountymn.gov

IP Address: 140.186.60.4

Record Tracking

Status: Original

8/12/2025 11:30:16 AM

Security Appliance Status: Connected Storage Appliance Status: Connected

Holder: Highway Permits

highwaypermits@anokacountymn.gov

Pool: StateLocal

Pool: Anoka County Location: Docusign

Signer Events

Steve Strandlund

stevesr@dirtworksmn.com

Security Level:

DocuSign.email ID: 1

8/12/2025 11:30:17 AM

Signature

DocuSigned by: Steve Strandlund

Signature Adoption: Pre-selected Style Using IP Address: 140.186.60.4

Timestamp

Sent: 8/12/2025 11:30:16 AM Viewed: 8/12/2025 11:30:24 AM Signed: 8/12/2025 11:35:34 AM

Electronic Record and Signature Disclosure:

Accepted: 9/7/2023 8:45:00 AM

ID: febdca61-5253-4ba1-92d4-d7cc7fe7cd84

Susan Burgmeier

Susan.Burgmeier@anokacountymn.gov

Associate Traffic Technician

Anoka County

Signing Group: Highway Permits

Security Level: Email, Account Authentication

(Optional)

Electronic Record and Signature Disclosure:

Accepted: 7/28/2025 7:54:59 AM

ID: c16d1b4b-7911-43c9-9382-b38bc1578d7d

Susan Burgmeier C5E91FE15CD44E

Signature Adoption: Pre-selected Style Using IP Address: 156.98.106.245

Sent: 8/12/2025 11:35:37 AM Viewed: 8/12/2025 11:41:24 AM Signed: 8/13/2025 10:25:59 AM

In Person Signer Events Signature **Timestamp Editor Delivery Events Status Timestamp Agent Delivery Events Status Timestamp Intermediary Delivery Events Status Timestamp Certified Delivery Events Status Timestamp Carbon Copy Events Status Timestamp**

Carbon Copy Events

Steve Strandlund stevesr@dirtworksmn.com

President

Dirtworks, Inc

Security Level: Email, Account Authentication

(Optional)

Electronic Record and Signature Disclosure:

Electronic Record and Signature Disclosure

Not Offered via Docusign

Status **Timestamp**

Sent: 8/13/2025 10:26:03 AM

Witness Events	Signature	Timestamp	
Notary Events	Signature	Timestamp	
Envelope Summary Events	Status	Timestamps	
Envelope Sent	Hashed/Encrypted	8/12/2025 11:30:16 AM	
Envelope Updated	Security Checked	8/12/2025 11:35:34 AM	
Envelope Updated	Security Checked	8/13/2025 10:25:59 AM	
Certified Delivered	Security Checked	8/12/2025 11:41:24 AM	
Signing Complete	Security Checked	8/13/2025 10:25:59 AM	
Completed	Security Checked	8/13/2025 10:26:03 AM	
Payment Events	Status	Timestamps	

COPIED

ELECTRONIC RECORD AND SIGNATURE DISCLOSURE

The following information constitutes Anoka County's (we, us or Company) written notices or disclosures relating to your use of DocuSign in relation to Anoka County's license. Described below are the terms and conditions for providing notices and disclosures electronically through the DocuSign system. Please read the information below carefully and thoroughly, and if you agree to this Electronic Record and Signature Disclosure (ERSD), please confirm your agreement by selecting the check-box next to 'I agree to use electronic records and signatures' before clicking 'CONTINUE' within the DocuSign system.

Getting paper copies

At any time, you may request from us a paper copy of any record provided or made available electronically to you by us. You will have the ability to download and print documents we send to you through the DocuSign system during and immediately after the signing session and, if you elect to create a DocuSign account, you may access the documents for a limited period of time (30 days) after the documents are first sent to you. At any time, if you request paper copies of any documents, you may be charged a fee. You may request paper copies from us by following the procedure described below.

Withdrawing your consent

If you decide to receive notices, disclosures and documents from us electronically, you may change your mind and tell us that going forward you want to receive documents only in paper format. Please note, processing time will be slowed down dramatically as we will be required to print and send the document through the mail and await your return of the documents. The process to change the method of receipt is described below.

All notices and disclosures will be sent to you electronically

Upon your acceptance to receive electronic notifications, all required notices, disclosures, authorizations, acknowledgements, and other documents that are required to be provided or made available to you during the course of our relationship with you will be provided electronically through the DocuSign system. All of the required documents will be provided to you at the address that you have given us.

How to contact Anoka County:

You may change your preferred method of contact whether electronically, or paper copies, or change your email address. You may also request paper copies of certain information from us, or withdraw your prior consent to receive documents. Please use the contact information below for your request and in the body of your correspondence, identify your desired action. If you are

changing an email address, please include your prior email address as well as your new address. If you no longer wish to receive future documents in electronic format, please include that request in the body of your email.

Email: helpdesk@co.anoka.mn.us

Phone: (763)-324-4110

Address: Anoka County Government Center

Attn: Information Technology, #300

2100 3rd Avenue Anoka, MN 55303

Required hardware and software

The minimum system requirements for using the DocuSign system may change over time. The current system requirements are found here: https://support.docusign.com/guides/signer-guide-signing-system-requirements.

ACKNOWLEDGEMENT

To confirm your access to the electronic notices and disclosures, which will be similar to other electronic notices and disclosures that we may provide to you, please acknowledge that you have read this ERSD by selecting the check-box next to 'I agree to use electronic records and signatures' before clicking 'CONTINUE' within the DocuSign system.

By selecting the check-box next to 'I agree to use electronic records and signatures', you confirm that:

- You can access and read this Electronic Record and Signature Disclosure; and
- You can print this Electronic Record and Signature Disclosure, or save or send this
 Electronic Record and Disclosure to a location where you can print it, for future reference
 and access; and
- Until or unless you notify Anoka County as described above, you consent to receive
 exclusively through electronic means all notices, disclosures, authorizations,
 acknowledgements, and other documents that are required to be provided or made
 available to you by Anoka County during the course of your relationship with Anoka
 County.