CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


County of Anoka

State of Minnesota

Witness Corner of Sec. 14 Township 31 Range 22
On the <u>25th</u> day of <u>March</u> , <u>1964</u> , the described corner was evidenced by <u>area resurvey</u>
and to perpetuate the location of said corner, at the exact location thereof, a permanent marker was placed consisting of <u>a cast iron monument</u>
AND on the <u>13th</u> day of <u>October</u> , <u>2016</u> , said permanent marker was <u>found flush with the</u>

Updated reference ties are as shown below.

surface and the ties were updated

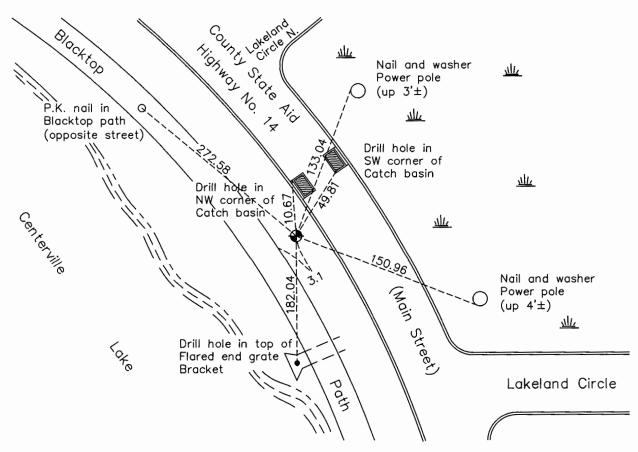



N.A.D. 1983 Coordinates (1996 Adjustment)

County F	Project Coordinates
Northing	148307.9171
Easting	553551.9644
Date	2/02/98

I hereby ce land survey complete to	monume the bes	ent record at o <i>ff)</i> my ki	is correc nowledge	t and
\ \		, Anoka	-	-
Minnesota	License	Number	181	65

Page No. 71

HISTORY OF GOVERNMENT CORNER

County of Anoka

State of Minnesota

Witness Corner of Sec. 14 Township 31 Range 22

(On south line of SW1/4)

CORNER HISTORY:

March 25, 1964 - Found P.K. nail on centerline stripe of County Road #14 set using area resurvey. Established ties to monument.

July 30, 1964 - Replaced P.K. nail with a Cast Iron Monument and updated ties.

July 9, 1965 - Found Cast Iron Monument and updated ties.

August 6, 1969 - Replaced broken Cast Iron Monument down 0.5'± with a new Cast Iron Monument set flush with the surface. Updated ties.

June 22, 1973 - Found Cast Iron Monument and updated ties.

July 29, 1986 - Found Cast Iron Monument and updated ties.

November 7, 1991 - Found Cast Iron Monument and updated ties.

June 14, 1996 - Found Cast Iron Monument and updated ties.

February 2, 1998 - Found Cast Iron Monument and established NAD 1983 (1996 Adjustment) Anoka County Project Coordinates by Static GPS methods. Updated ties.

May 21, 2009 - Found Cast Iron Monument and updated ties.

July 6, 2010 - Found Cast Iron Monument flush with the surface and updated ties.

October 13, 2016 - Found Cast Iron Monument flush with the surface and updated ties. Verified location of corner by VRS GPS methods.