## ANOKA COUNTY HIGHWAY DEPARTMENT 1440 BUNKER LAKE BLVD. N.W. ANDOVER, MN 55304 PERMIT PHONE (763) 324-3176

## APPLICATION FOR PERMIT FOR INSTALLATION OF UTILITIES OR FOR PLACING OBSTRUCTIONS ON COUNTY HIGHWAY SYSTEM

	OFFICE USE ONLY		1			
	Permit Number 23-039					
Permit Fee \$ 150.00	CSAH/C.R. CSAH 1 - COON RAPIDS BLVD NW  License/Permit Bond Required \$					
Femili Fee \$	Licensen ennit bond rrequired \$ Off the					
Name of applicant: Crystal Christianson			Telepho	ne: 612 216-80	073	
Address (street, city, state, zip cod	e): 8701 Monticello In, Maple Grove, MN 55	369				
Name of individual/company perfor	ming work:					
Nature of work:	Xcel Energy	Method of	inetallation	/construction:		
Boring underground cable across street			Method of installation/construction: Boring			
Address of work site: 4021 coon rapids blvd			In the city/township of: Coon rapids			
Surface to be disturbed:	<u></u>	Is the shou	ulder to be	disturbed?		
Ditch GravelX Bituminous Concrete None				Yes	X No	
Number and size of excavations:			be obstruct	ted in any way?		
4-5, potholes				X Yes	☐ No	
Size and kind of pipe/cable:  1/0 triplex 3 phase			Depth from surface: 3-5ft			
Work to start on or after:			Work to be completed by: 09/25/2023			
06/20/2023 Restrictions:			03/23/2023			
SEE ATTAC	HED					
utility/contractor. Emergency cond rule. The utility/contractor, under the completed at the earliest possib A license-permit bond is generally A sketch or drawing shall accomp county highway center line and right shall be the responsibility of the to each permit.  The Anoka County Highway Departure and job site, the special conditions safety is threatened.  The applicant shall notify ACHD ir or not restoration has been satisfactors.	required of the contractor, the amount of which we any each permit application which will show the local net-of-way line. A complete set of plans is required applicant to determine which of the special conditional contract (ACHD) reserves the right to revoke any utilisted on the reverse side of this form are not met a summediately upon completion of project so that the contract of the second contract is the second contract of the se	equire immed lete the nece ill be determi cation of the for all sewer/ ions (listed or ility permit are and/or a haza ACHD can in	diate repair ressary repair re	are exceptions to direct irs. A written per nature of the utility with reference ts. see side of this for the applicant of the applicant of the determine	o this rmit is to lity work. nce to the rm) apply tion of or public whether	
to fully comply therewith to the satis by the permittee, from any demand	sfaction of the ACHD. The County of Anoka, Its of s, claims or suits arising out of the granting of the	ficials and en permit.	-	•	•	
Date 02/14/2023 Applicant	's Signature Sugara Marcani	<u> </u>	-			
permission is hereby granted for the general conditions listed above FOR SPECIAL CONDITIONS).  It is expressly understood that this to their original or to a satisfactory of township authorities having joint su	AUTHORIZATION OF PERM agreement to comply in all respects with the regul e work to be done as described in the above applic and the special conditions required as hereby states permit is conditioned upon replacement or restorated condition. It is further understood that this permit is pervision over said street or highway.  ANOKA COUNTY HIGHWAY DEPA	ations of the cation. Said ted: (SEE REation of the Cas issued subj	work to be EVERSE S County High ject to the a	done in accorda IDE OF THIS FC	nce with DRM t of way	
Approved by Susan E Associate Ti	raffic Technician Distribution: White-Applicant Yellow-Highway Depart	by SB	Date	e <u>02/16/20</u>	)23_	
DETACH AND RETURN THIS STUB Permit Number		Send to:	1440 Bun	ection ounty Highway Dep ker Lake Blvd. N.W MN 55304		
Date Completed//			AHUUVEL,	IVII JUJUH		

Name Of Applicant\_\_

## SPECIAL CONDITIONS

#### TRAFFIC CONTROL

- I. Detours
  - A. Detailed detour layouts shall be submitted to the Traffic Engineer for approval.
  - B. No detours shall be permitted without prior approval of the Anoka County Traffic Engineer.
  - C. One week's notice must be given prior to the installation of any detour.
  - D. It shall be the responsibility of the applicant to notify Anoka County Central Communications, local government bodies, and any affected bus companies 48 hours prior to any road closures/detours.
- E. Immediately upon completion of work and/or detours, all posts, barricades, and signs shall be removed from the right of way.
- II. Traffic Control Devices
  - A. All traffic control devices, barricades, flashers, etc. shall be furnished by the applicant and shall be in accordance with the most recent edition of the Minnesota Manual on Uniform Traffic Control Devices and Temporary Traffic Control Zone layouts-Field Manual of the same manual.

### **CONSTRUCTION REQUIREMENTS**

- 1. Open cutting of bituminous or concrete surfaced roads will be allowed only at the discretion of the County Engineer.
- II. Neither supplies nor excavated materials shall be placed on the bituminous or concrete surface at any time.
- III. No trenches will be allowed to remain open overnight.
- IV. Materials removed from the trench shall be used as backfill insofar as they are suitable. All backfill material shall conform to MnDOT specifications for compaction. The use of heavy equipment on top of trench, slapping with backhoe bucket and/or backcasting to achieve compaction is prohibited. Any additional material required to back fill to the original grade shall be furnished by the applicant at no expense to ACHD. All the base and surface courses damaged during construction operations shall be restored to a condition equal to or better than before operations began. The applicant shall be responsible for and restore any settlement.
- V. All culverts, ditches, shoulders and backslopes shall be restored to their original condition unless otherwise directed by the ACHD. Shoulders which have been previously constructed or reconstructed with special materials shall be replaced in kind. Restoration of signs, guardrails, guardposts, etc. are the sole responsibility of the applicant and shall be restored to their original condition.
- VI. All roadway maintenance required within the limits of the utility project that is related to the applicant's activities shall be the sole responsibility of the applicant for 1 year after completion of the project. Upon completion of the restoration work, the applicant shall request a final inspection by the ACHD. The ACHD's approved completion date shall be the starting date of the applicant's 1-year responsibility.

#### HORIZONTAL BORING AND JACKING

- I. All hard surface roadways shall be jacked or bored.
- II. All crossings of Anoka County maintained roadbeds shall be made by boring inside a casing or carrier pipe, or by jacking unless otherwise directed by the Anoka County Engineer. The auger shall lag the casing or carrier pipe by at least 6 inches whenever possible and never lead the carrier pipe by more than 1 inch.
- III. The use of pneumatic devices to facilitate the roadbed crossings will be allowed in most cases with prior approval. In the event approval is not granted and applicant uses a pneumatic device to cross a roadbed and encounters an obstruction and/or unstable subbase material which makes forward or reverse motion of pneumatic device impossible, said pneumatic device then becomes part of the roadway subbase and permission to excavate to retrieve device will not be granted.
- IV. If a pneumatic device is used for the work permitted herein, the Installation must be kept to a minimum of 4 feet below the surface of the roadway if the pneumatic device is less than 2 inches in diameter, and a minimum of 5 feet below the surface of the roadway if the pneumatic device is 2 inches in diameter or larger.

## **BITUMINOUS RESTORATION**

- The locations and dimensions of all openings to be made in the bituminous surface shall be approved by the ACHD prior to any cutting or any surface opening operations.
- II. All openings in bituminous surfaces shall be cut in a straight line with sides smooth and vertical. No ragged edges will be permitted. Cutting shall be done with a concrete saw.
- III. All necessary dust control operations shall be carried out by the applicant at no expense to Anoka County.
- IV. The minimum requirement for subgrade replacement shall be the upper 12 inches of material and shall meet MnDOT specifications for Class 5 placed in 6-inch layers compacted to 100 percent of optimum density.
- V. All manhole casings, gate valves and other utility structures shall be set one-quarter inch below the top of the finished surface.
- VI. Bituminous tack coat materials and application thereof shall conform to MnDOT specification 2357.
- VII. All bituminous surfacing shall be replaced as soon as practical after the base construction. All bituminous surfacing shall be machine laid. Any exceptions must be approved by the ACHD. Bituminous surfacing shall be replaced to original pavement depth or to a minimum of six (6) inches of bituminous mixture (2360), whichever is greater. Bituminous mixtures must be placed in lifts not exceeding three (3) inches in thickness for base and binder courses and not exceeding two (2) inches for the wear course.
- VIII. All surface restoration regardless of size shall conform to existing grades.
- IX. Any unnecessary or negligent damage to bituminous surface in conjunction with the installation and/or repair of a utility shall be cut out and replaced in kind as directed by ACHD.

## CONCRETE RESTORATION

I. Curb and gutter, sidewalks and driveways shall be restored in accordance with MnDOT specifications 2531 and 2521.

## LITH ITY LINES

- I. There shall be only a single pole line on the county right-of-way on either side of the center line thereof.
- II. Exact locations of longitudinal installations on county highways shall be located as directed by ACHD.

## SECTION CORNER MONUMENTS

- I. Utility locations shall not interfere with the location of any section, quarter, witness or R.O.W. monuments. For assistance in locations, contact the Anoka County Surveyor's Office.
- II. The applicant shall be responsible for replacement of any existing property irons disturbed during construction.
- III. The applicant shall notify the Anoka County Surveyor's Office 3 working days in advance of any anticipated disturbance of any section, quarter, witness or R.O.W. monuments.
- IV. Any monument disturbed during the course of construction shall be reset by the Anoka County Surveyor's Office at the expense of the applicant.

## ATTACHING TO BRIDGES/STRUCTURES

 No utility is permitted to be hung from or otherwise attached to any bridge or structure without having detailed plans approved by the Anoka County Engineer. These plans are to show approaches to the structure, method of installation, type and dimension of housing for the utility.

# SPECIAL CONDITIONS FOR ADVANCE NOTIFICATION FOR COMMENCEMENT & COMPLETION OF WORK

PERMIT HOLDER:	
PERMIT NUMBER:	ROAD NUMBER:
CONTRACTOR CONTACT:	
PERMIT ACTIVE DATE:	

SUBCONTRACTORS, AND CREW POSSESS **COPY** ALL INSTALLERS, SHALL Α RELATION TO THE APPROVED PERMIT OF ALL DOCUMENTS IN PRIOR TO THE COMMENCEMENT OF WORK AND BE KEPT ON SITE. THIS INCLUDES, BUT IS NOT LIMITED TO, THE FOLLOWING:


APPROVED PERMIT

PERMIT EXPIRE DATE:

- NOTIFICATION SHEET
- ANY/ALL TRAFFIC CONTROL LAYOUTS/PLANS

#### SPECIAL CONDITIONS

- ALL TRAFFIC CONTROL SHALL BE IN ACCORDANCE WITH THE MOST CURRENT VERSION OF THE MNDOT TEMPORARY TRAFFIC CONTROL FIELD MANUAL
- SHALL USE A SHOULDER CLOSURE (LAYOUT 8) IF ANY PORTION OF THE SHOULDER IS ENCROACHED
- SHALL USE A RTL CLOSURE (LAYOUT 33) 9AM TO 3PM ONLY, IF ANY PORTION OF THE ROAD/ LANE IS ENCROACHED
- NO CLOSURES WITHOUT PRIOR APPROVAL FROM ACHD
- ALL TRAFFIC CONTROL DEVICES SHALL BE REMOVED, SIGNS TURNED, LAID DOWN, OR COVERED AT THE END OF EACH WORK DAY, OR WHEN NO WORK IS TAKING PLACE UNLESS WRITTEN APPROVAL STATING OTHERWISE
- SHALL NOTIFY ANDREA SCHMID (andrea.schmid@co.anoka.mn.us or 763-324-3128) 48
   HOURS PRIOR TO THE COMMENCEMENT OF WORK WITH THE PERMIT NUMBER,
   THE DATE/TIME WORK IS TO BE PERFORMED, AND THE ESTIMATED DURATION
   OF WORK
- SHALL NOTIFY ANDREA SCHMID (andrea.schmid@co.anoka.mn.us or 763-324-3128)
   WHEN WORK IS COMPLETE
- NO WORK DURING INCLEMENT WEATHER OR WHEN PLOWS ARE OUT IN ANY CAPACITY
- NO PARKING/WORK ON THE SIDEWALK OR TRAIL WITHOUT PRIOR AUTHORIZATION FROM THE CITY
- SHALL CONTACT ANOKA COUNTY SIGNAL DEPARTMENT @ 651-801-8969 FOR SIGNAL RELATED WORK
- 60" UNDER CSAH 1

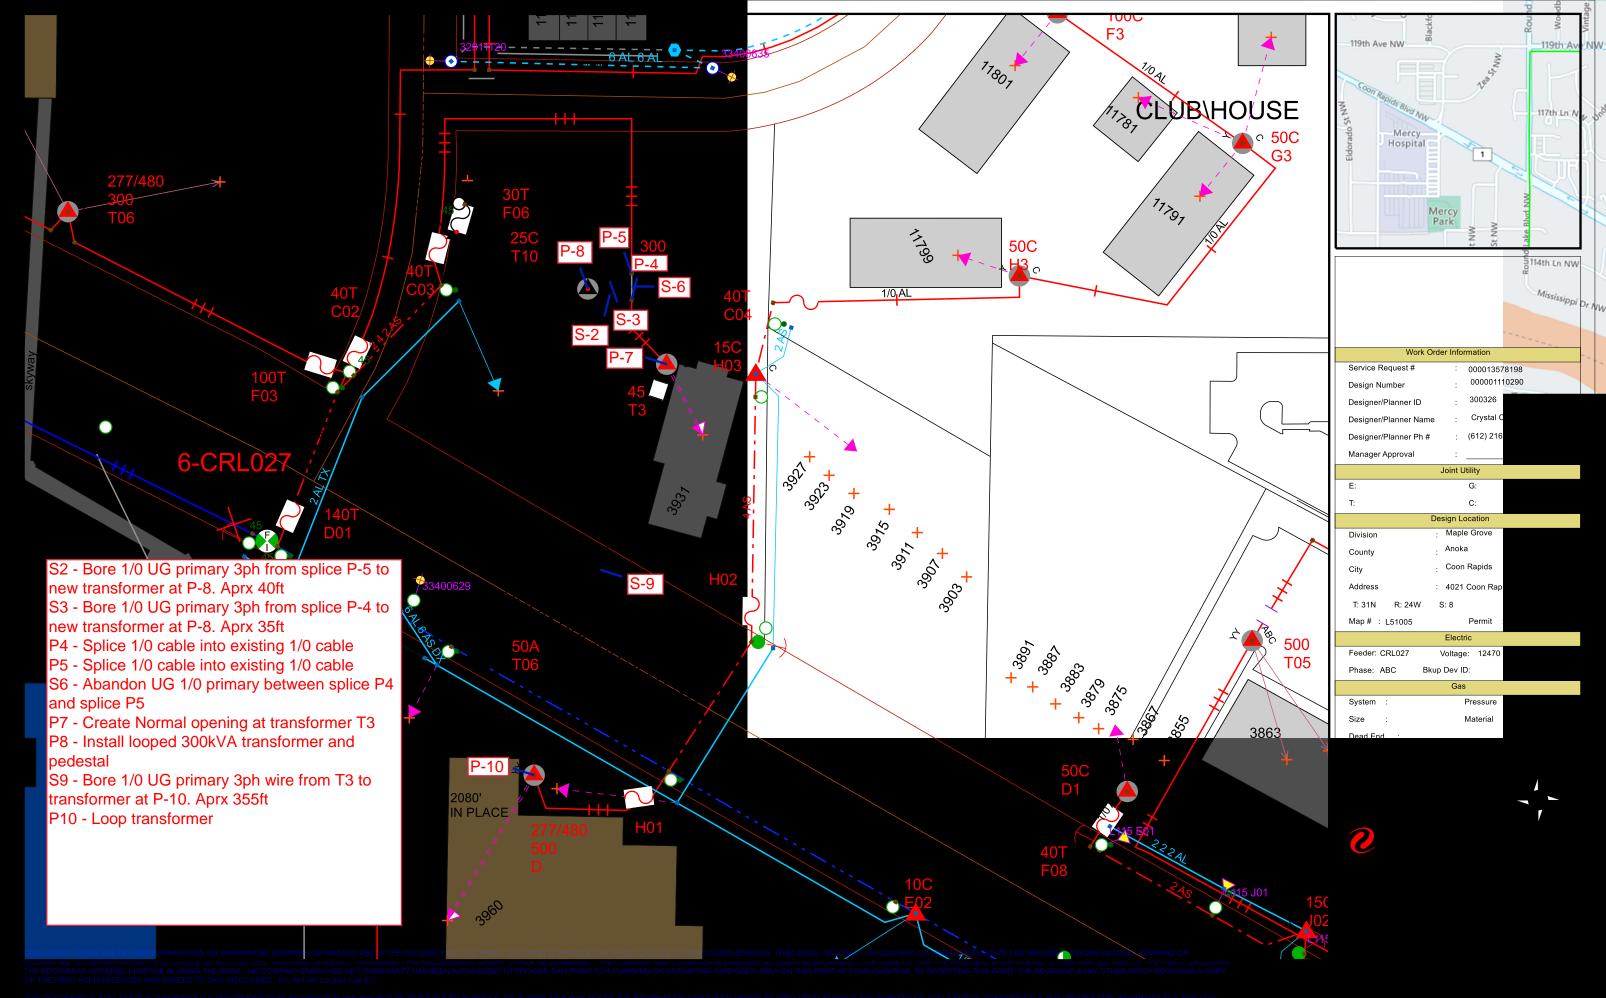

THIS DOCUMENT IS XCEL ENERGY CONFIDENTIALS AND PROPRIETARY INFORMATION AND MAY NOT BE REPRODUCED IN WHOLE, OR IN PART, NOR MAY ANY OF THE INFORMATION CONTIANED HEREIN BE DISCLOSED WITHOUT THE CONSENT OF XCEL ENERGY. CONFIDENTIALS AND PROPRIETARY INFORMATION © 2019 XCENERGY INC. | XCEL ENERGY IS REGISTERED TRADEMARK OF XCEL ENERGY INC