

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

County of Anoka

State of Minnesota



## East 1/4 Corner of Sec. 33 Township 32 Range 24

On the 29th day of August, 1960, the described corner was evidenced by a 1" iron pipe

and to perpetuate the location of said corner, at the exact location thereof, a permanent marker was placed consisting of a cast iron monument

AND on the 4th day of November, 2010, said permanent marker was found flush with the surface and the ties were updated

Updated reference ties are as shown below.

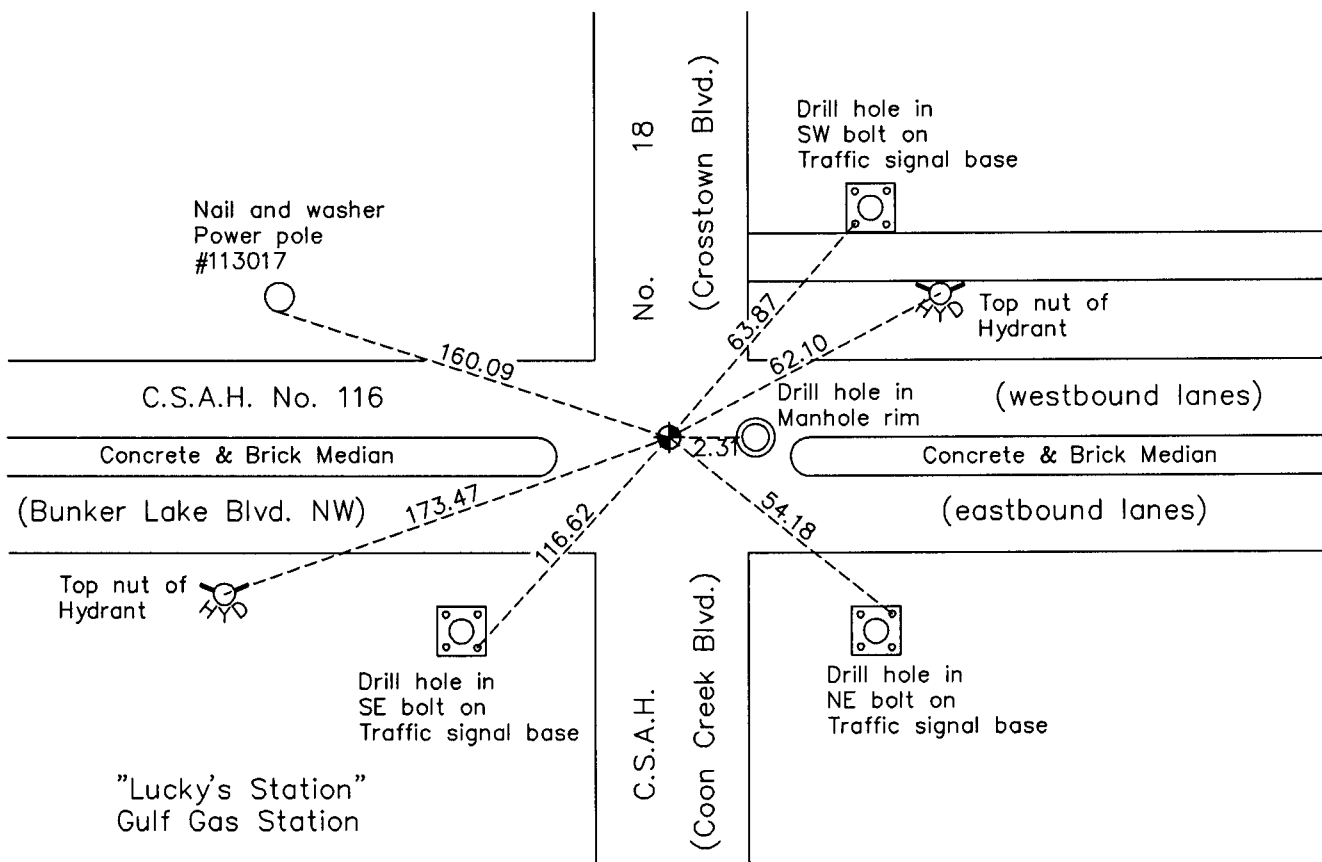

Revision Date

6/23/11

N.A.D. 1983 Coordinates  
(1996 Adjustment)

| County Project Coordinates |             |
|----------------------------|-------------|
| Northing                   | 167219.2927 |
| Easting                    | 484482.4921 |
| Date                       | 7/19/00     |

I hereby certify that this United States public land survey monument record is correct and complete to the best of my knowledge and belief.

*Larry D. Hoium* Date 6/23/11

Larry D. Hoium, Anoka County Surveyor

Minnesota License Number 18165

# HISTORY OF GOVERNMENT CORNER

Page No. 115

County of Anoka

State of Minnesota

## East 1/4 Corner of Sec. 33 Township 32 Range 24

### **CORNER HISTORY:**

June 1957 - Cartwright and Olson indicate that corner is a 1-1/2" X 2' iron pipe down 1' on north edge of road. Established ties to monument.

July 29, 1960 - Found iron pipe down 0.3' and updated ties.

April 17, 1962 - Found 1" iron pipe and updated ties due to road construction.

June 12, 1964 - Replaced iron pipe with a cast iron monument set depth of monument in type of surface. Updated ties.

August 20, 1964 - Found cast iron monument and updated ties.

July 23, 1968 - Found cast iron monument and updated ties.

July 7, 1972 - Found cast iron monument and updated ties.

February 26, 1976 - Set construction ties ( P.K. nails 100' east and west of corner) prior to road construction.

December 30, 1977 - Set cast iron monument flush with the surface after road construction using construction ties. Updated ties.

July 27, 1978 - Found cast iron monument and updated ties.

September 26, 1978 - Raised cast iron monument and updated ties.

June 7, 1979 - Found cast iron monument and updated ties.

August 2, 1988 - Found cast iron monument and updated ties.

July 19, 1993 - Found cast iron monument and updated ties.

May 4, 1999 - Set construction ties and removed cast iron monument prior to road construction.

October 25, 1999 - Set cast iron monument after road construction using construction ties. Updated ties.

July 19, 2000 - Found cast iron monument and established NAD 1983 ( 1996 Adjustment) Anoka County Project Coordinates by Static GPS methods. Updated ties.

November 4, 2010 - Found cast iron monument flush with the surface and updated ties.